


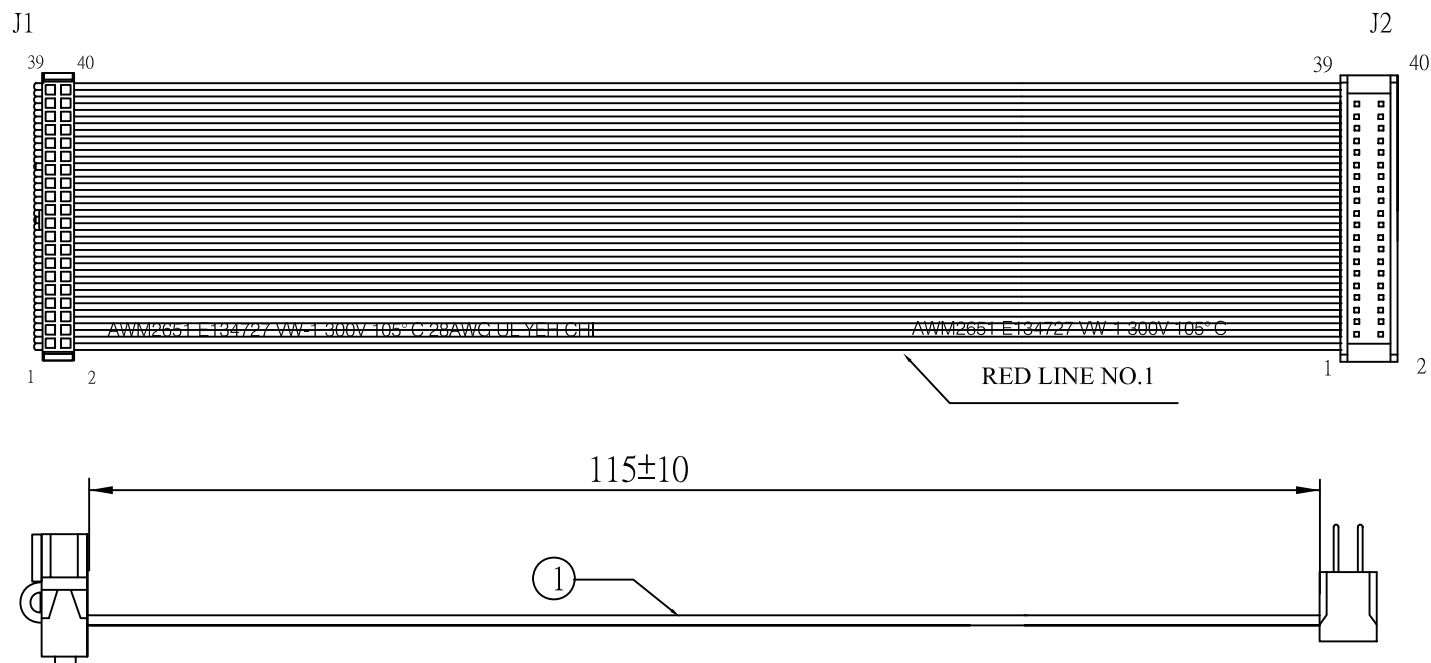

J1		J2
P1	MARKING LINE	P1
P2	GRAY	P2
P3	GRAY	P3
	⌋	
P38	GRAY	P38
P39	GRAY	P39
P40	GRAY	P40
PIN ASSIGNMENT		

NOTE:

- 1.FLAT CABLE:UL2651 28AWG 20C TINNED AND STRAND COPPER WIRE
P=1.27MM.INSULATOR:PVC,GRAY
- 2.CONNECTOR:40P IDC SOCKET CONTACT GOLD FLASH.
INSULATOR:BLACK
- 3.CONNECTOR:40P DIP IDC
INSULATOR:BLACK
- 4.ELECTRONIC TEST CONDITION:
 - 4.1 100% OPEN SHORT & MIS-WIRE TEST
 - 4.2 CONDUCTIVE RESISTANCE:1/MAX
 - 4.3 INSULATION RESISTANCE:1/MIN,DCSV

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

F3IP01-4040-A11C5-LF

SERIES

LEADFREE

115mm

FEMALE TO MALE

40 TO 40 PIN

DESCRIPTION: 40P IDC W/SR/DIP IDC L:80mm