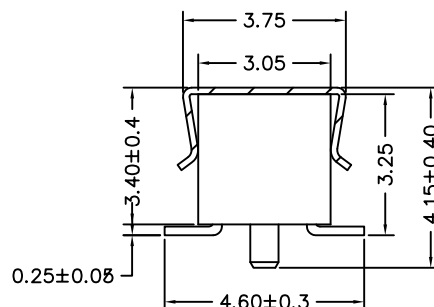


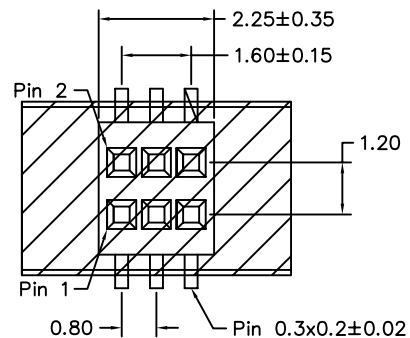


Recommended P.C.B Layout

MATERIAL

Contact Pin : Phosphor Bronze

SPECIFICATION

Current Rate : 0.75 AMP

Insulation Resistance : 5000MΩMin.

Contact Resistance : 15mΩMax.

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

F8-V33PC-2X03-LF
 SERIES | CAP | POST | HIGH 3.25mm | 180°SMT | 06 WAY | LEADFREE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

DESCRIPTION:FEMALE HEADER 0.8*1.2mm SMT TYPE, DUAL ROWS HEIGHT 3.0mm