

Recommended P.C.B Layout

MATERIAL
Contact Pin : Phosphor Bronze

SPECIFICATION
Current Rate : 0.75 AMP
Insulation Resistance : 5000MΩMin.
Contact Resistance : 15mΩMax.
Dielectric Voltage : AC 500V for one minute

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±
.X ± 0.30

CHECKED BY GENIUS

.XX ± 0.15

UNIT / mm

SCALE 1 : 1

.XXX ±

ANG ± 3°


DATE

SIZE A4

PJECTION

照片框

ORDER INFORMATION

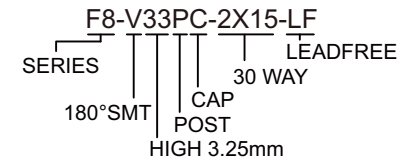

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: FEMALE HEADER 0.8*1.2mm
SMT TYPE, DUAL ROWS HEIGHT 3.0mm CAP+TUBE