
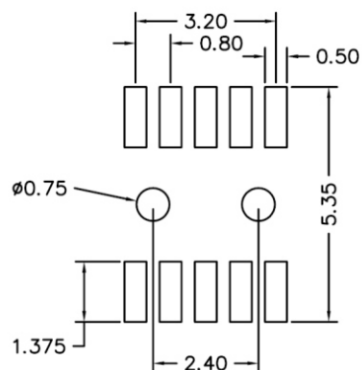
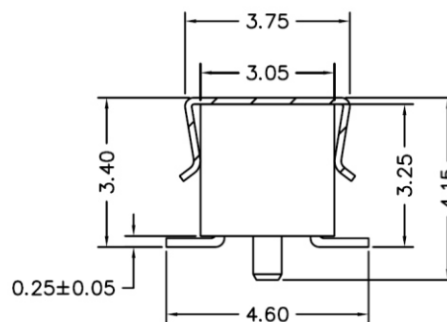
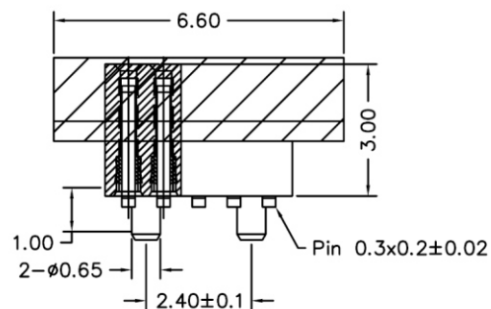



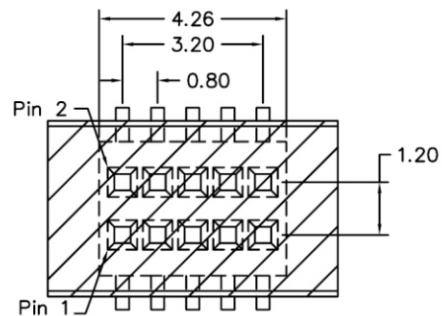

Recommended P.C.B Layout

MATERIAL

Contact Pin : Phosphor Bronze

SPECIFICATION

Current Rate : 0.75 AMP

Insulation Resistance : 5000MΩMin.

Contact Resistance : 15mΩMax.

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XX ±

DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

F8-V33PS10C-2X05-LF
 SERIES POST CAP SEMI GOLD 10u"
 180°SMT HIGH 3.25mm
 10 WAY LEADFREE

DESCRIPTION:FEMALE HEADER 0.8*1.2mm SMT TYPE, DUAL ROWS HEIGHT 3.0mm

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com