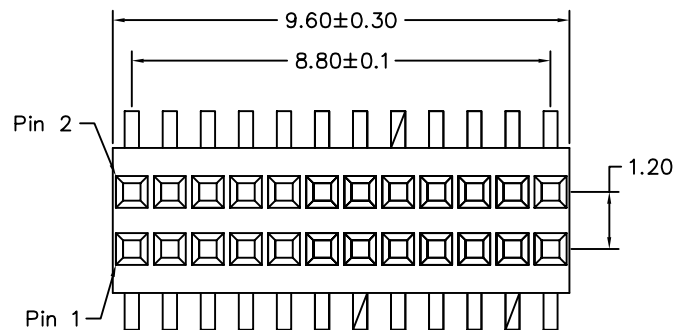


MATERIAL

Contact Pin : Phosphor Bronze

SPECIFICATION




Current Rate : 0.75 AMP

Insulation Resistance : 5000MΩMin.

Contact Resistance : 15mΩMax.

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

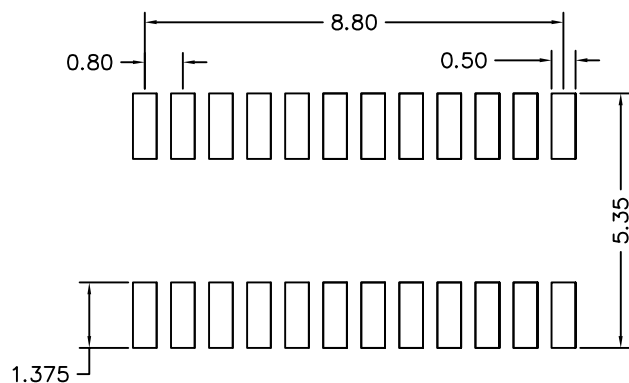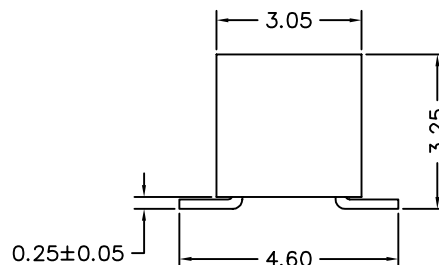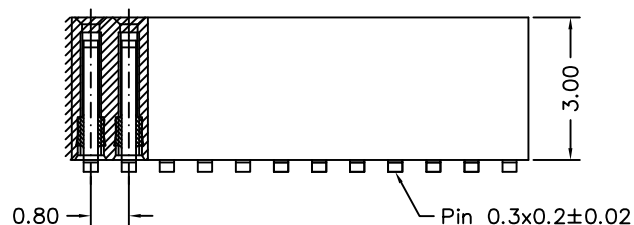

Recommended P.C.B Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X, ±

UNIT / mm

SCALE 1 : 1

.XX, ±

DATE

.XXX, ±

ANG, ±

照片框

ORDER INFORMATION

F8-V33X-2X12-LF
SERIES | NON POST | 24 WAY | LEADFREE
HIGH 3.25mm
180°SMT

煜倫股份有限公司

www.morethanall.com

SIZE A4

PPOJECTION

DESCRIPTION:FEMALE HEADER 0.8*1.2mm SMT TYPE, DUAL ROWS HEIGHT 3.0mm