
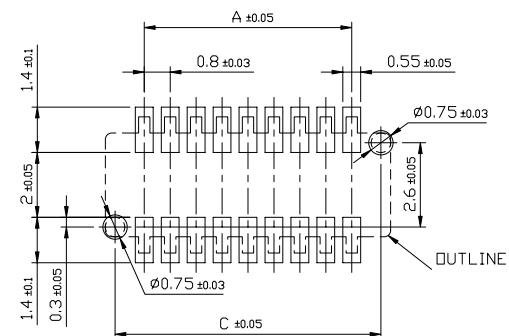




PCB. PATTERN (REF)






TABLE 1

NO.	A	B	C
06	1.6	4	3.4
08	2.4	4.8	4.2
10	3.2	5.6	5
12	4	6.4	5.8
14	4.8	7.2	6.6
16	5.6	8	7.4
18	6.4	8.8	8.2
20	7.2	9.6	9
22	8	10.4	9.8
24	8.8	11.2	10.6
26	9.6	12	11.4
28	10.4	12.8	12.2
30	11.2	13.6	13
32	12	14.4	13.8
34	12.8	15.2	14.6
36	13.6	16	15.4

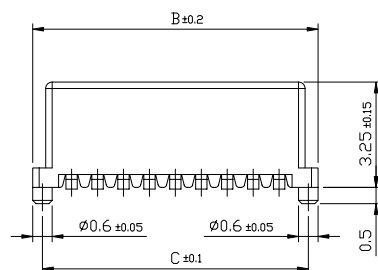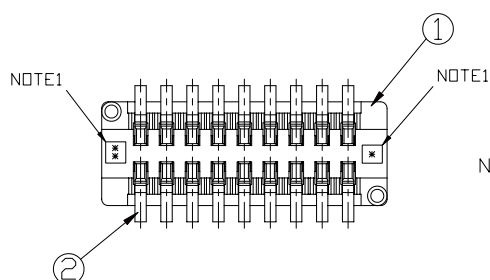

NOTE :
 1. NO. OF CONTACTS AND CAVITY NO.
 2. PLEASE LOOK AT TABLE1 WITH THE DIMENSION OF A,B,C...ETC.

2	CONTACT	TABLE1	COPPER ALLOY	Sn OVER Nickle	
1	INSULATOR	1	THERMOPLASTIC HIGH-TEMP		BLACK
No.	Description	Quantity	Material	Finish	Remark

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.20
 .XX ± 0.10
 .XXX ±
 ANG ± 3°

PPOJECTION

照片框



ORDER INFORMATION

F85-VPR-xx-LF


SERIES

LEADFREE
 06~36 WAY
 REEL
 POST
 180°SMT

DESCRIPTION:

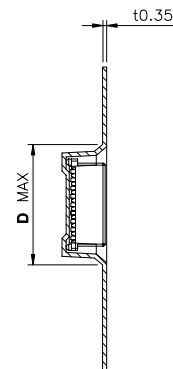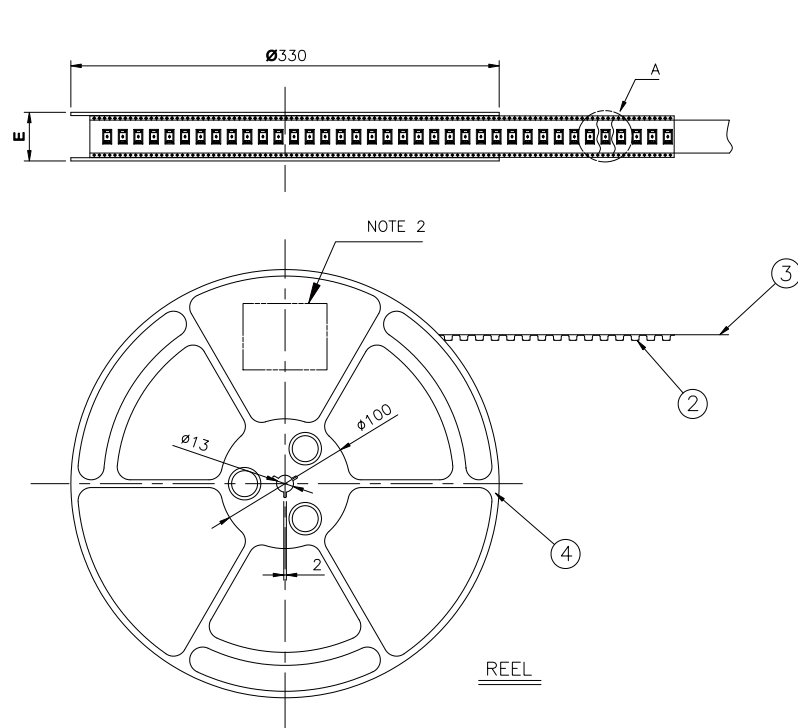


B-B SECTION

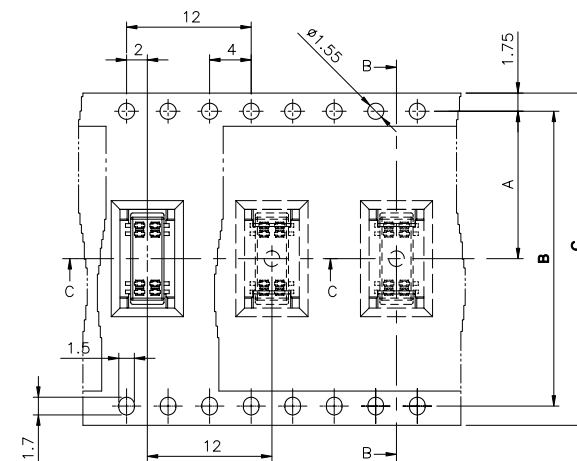


A VIEW DETAIL

TABLE 1

Pos.	A	B	C	D	E
06	7.5	—	16	11.5	21.5
08	7.5	—	16	11.5	21.5
10	7.5	—	16	11.5	21.5
12	7.5	—	16	11.5	21.5
14	11.5	—	24	18.5	29.5
16	11.5	—	24	18.5	29.5
18	11.5	—	24	18.5	29.5
20	11.5	—	24	18.5	29.5
22	11.5	—	24	18.5	29.5
24	11.5	—	24	18.5	29.5
26	11.5	—	24	18.5	29.5
28	11.5	—	24	18.5	29.5
30	11.5	—	24	18.5	29.5
32	14.2	28.4	32	23	37.5
34	14.2	28.4	32	23	37.5
36	14.2	28.4	32	23	37.5



C-C SECTION

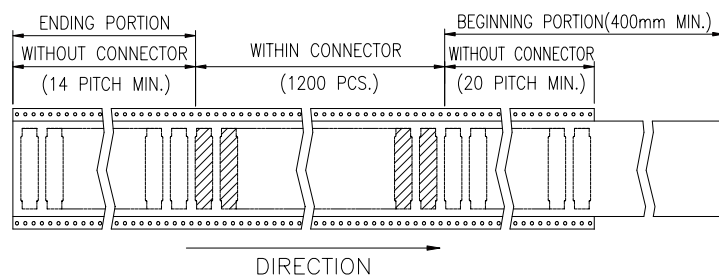

4	REEL	1	—	—
3	COVER-TAPE	—	PET	—
2	CARRIER-TAPE	—	PS	—
1	CONNECTOR	1200	—	—
ITEM	DESCRIPTION	COUNT	MATERIAL	FINISH

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ±
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

F85-VPR-xx-LF

SERIES

LEADFREE
06-36 WAY
REEL
POST
180°SMT

DESCRIPTION: