

Specifications

Current Rating: 3Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 600V AC/DC




Contact Resistance: 20mΩ Max.

Operating Temperature: -40°C to +105°C

Materials


Contact Material: Phosphor Bronze

Insulation Material: Polyester, UL 94V-0
P.B.T

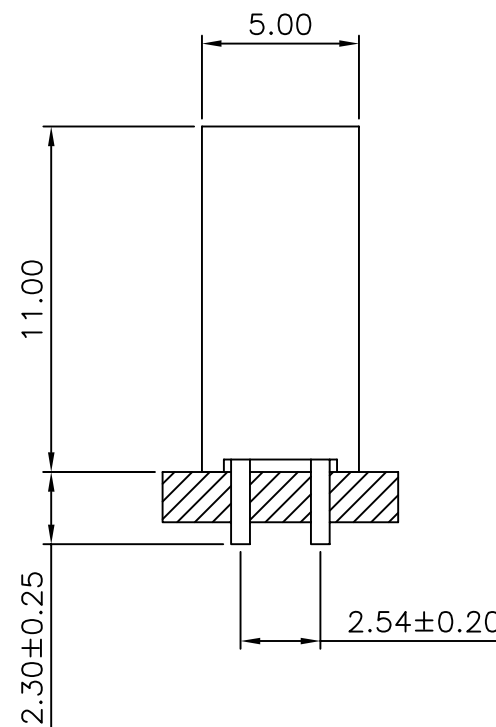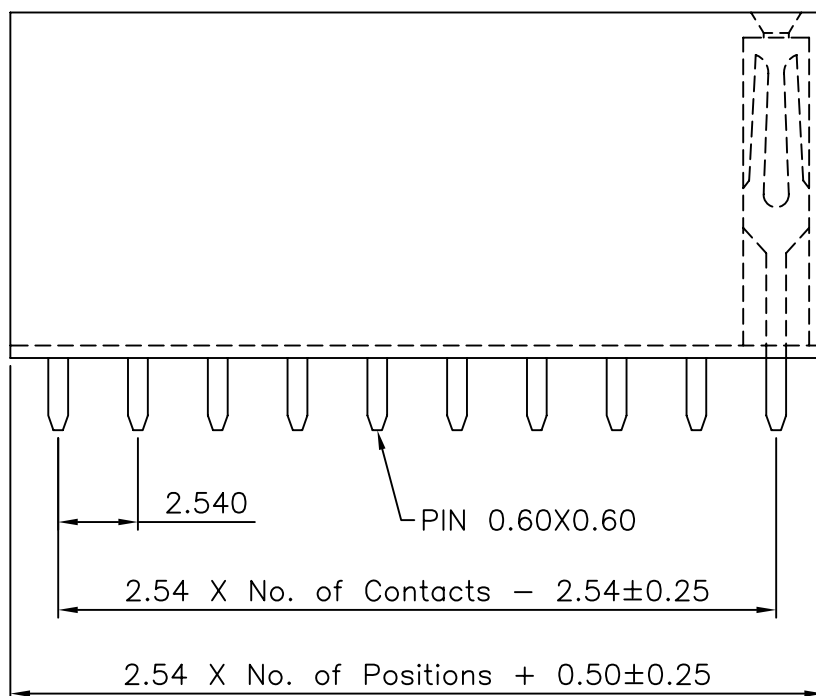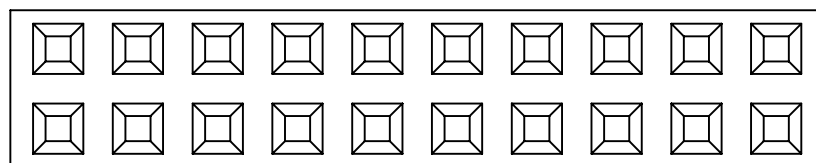

Recommended P.C.Board

Hole Layout

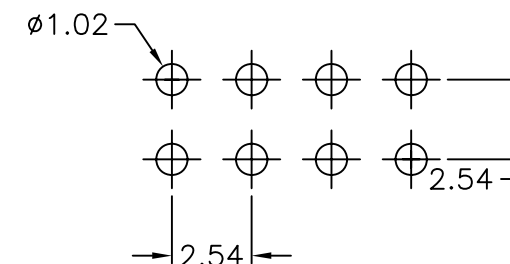

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.13
ANG ±

照片框

ORDER INFORMATION

FE-D110-2Xxx-LF
SERIES
LEADFREE
2X02:04WAY
2X40:80WAY
HIGH 11.00mm
DIP 180°

DESCRIPTION: 2.54 FEMALE HEADER DUAL ROWS DIP TYP BASE 11.00H