

P.C.B LAYOUT


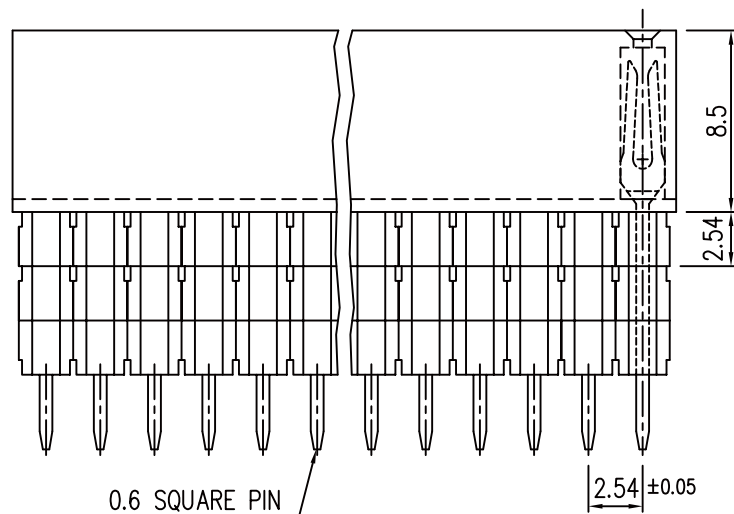


Table A

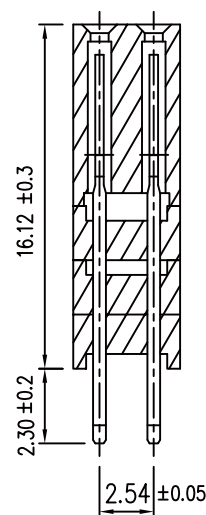

SPECIFICATIONS

CURRENT RATING : 3 AMPS

INSULATOR RESISTANCE : 5000 MEGOHMS MIN.

CONTACT RESISTANCE : 20 MILLIOHMS MAX.

DIELECTRIC WITHSTANDING : AC 500V

OPERATING TEMPERATURE : -40°C - +105°C

CONTACT MATERIAL : PHOSPHOR BRONZE

INSULATOR MATERIAL : POLYESTER, UL 94V-0

STANDARD : P.B.T

CONTACT PLATED : FULL GOLD, FULL TIN,
OR SELECTIVE PLATED

PIN 數	A(MM)	B(MM)	PIN 數	A(MM)	B(MM)
2*02	5.58	2.54	2*22	56.38	53.34
2*03	8.12	5.08	2*23	58.92	55.88
2*04	10.66	7.62	2*24	61.46	58.42
2*05	13.2	10.16	2*25	64	60.96
2*06	15.74	12.7	2*26	66.54	63.5
2*07	18.28	15.24	2*27	69.08	66.04
2*08	20.82	17.78	2*28	71.62	68.58
2*09	23.36	20.32	2*29	74.16	71.12
2*10	25.9	22.86	2*30	76.7	73.66
2*11	28.44	25.4	2*31	79.24	76.2
2*12	30.98	27.94	2*32	81.78	78.74
2*13	33.52	30.48	2*33	84.32	81.28
2*14	36.06	33.02	2*34	86.86	83.82
2*15	38.6	35.56	2*35	89.4	86.36
2*16	41.14	38.1	2*36	91.94	88.9
2*17	43.68	40.64	2*37	94.48	91.44
2*18	46.22	43.18	2*38	97.02	93.98
2*19	48.76	45.72	2*39	99.56	96.52
2*20	51.3	48.26	2*40	102.1	99.06
2*21	53.84	50.8			

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

FE-D18C-2Xxx-LF
SERIES | LEADFREE
2X02:04WAY
2X40:80WAY
3 BASE
DIP 180° TOTAL HIGH 18.42mm

DESCRIPTION: ELEVATED FEMALE HEADER P2.54mm