
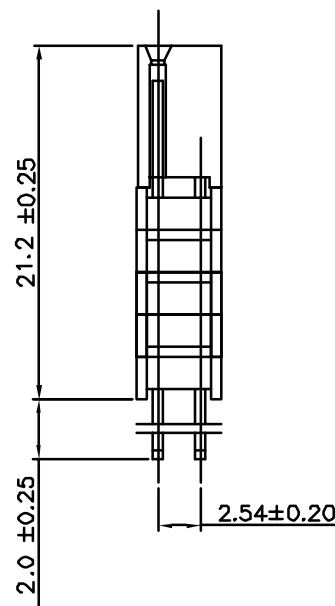


Recommended P.C.B. Layout
(Tolerance:0.05mm)

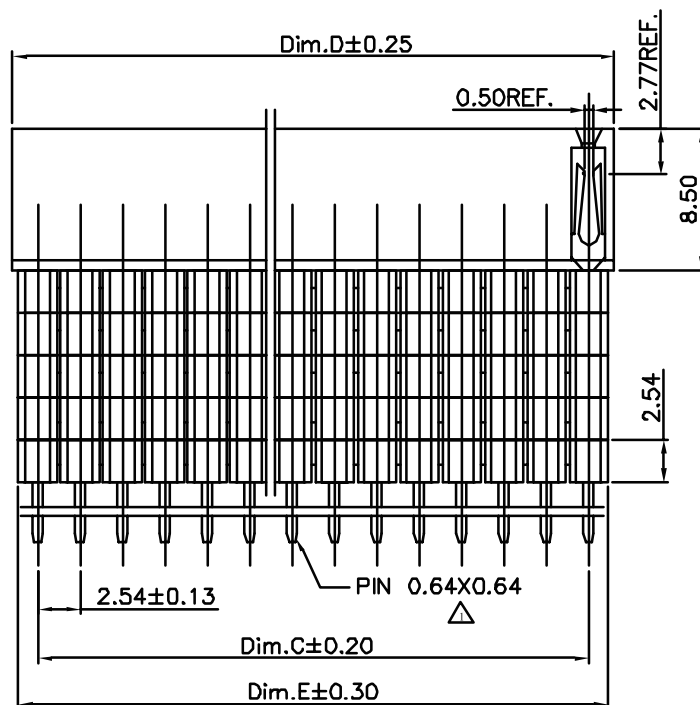

Specifications:

- 1.1 Current Rating: 3Amp
- 1.2 Insulation Resistance: 1000MΩ Min.
- 1.3 Dielectric Withstanding: 600V AC/DC
- 1.4 Contact Resistance: 20mΩ Max.
- 1.5 Operating Temperature: -40°C to +105°C

Materials:

- 2.1 Contact Material: Phosphor Bronze
- 2.2 Insulation Material: Polyester, UL 94V-0
- A= 02~40Pins use P.B.T Black
- B= 02~40Pins use Nylon6T Black
- C= 02~40Pins use LCP Black

No. of PIN/ROW	Dimension Information		
	Dim.C	Dim.D	Dim.E
02	2.54	5.58	5.08
03	5.08	8.12	7.62
04	7.62	10.66	10.16
05	10.16	13.20	12.70
06	12.70	15.74	15.24
07	15.24	18.28	17.78
08	17.78	20.82	20.32
09	20.32	23.36	22.86
10	22.86	25.90	25.40
11	25.40	28.44	27.94
12	27.94	30.98	30.48
13	30.48	33.52	33.02
14	33.02	36.06	35.56
15	35.56	38.60	38.10
16	38.10	41.14	40.64
17	40.64	43.68	43.18
18	43.18	46.22	45.72
19	45.72	48.76	48.26
20	48.26	51.30	50.80
21	50.80	53.84	53.34
22	53.34	56.38	55.88
23	55.88	58.92	58.42
24	58.42	61.46	60.96
25	60.96	64.00	63.50
26	63.50	66.54	66.04
27	66.04	69.08	68.58
28	68.58	71.62	71.12
29	71.12	74.16	73.66
30	73.66	76.70	76.20
31	76.20	79.24	78.74
32	78.74	81.78	81.28
33	81.28	84.32	83.82
34	83.82	86.86	86.36
35	86.36	89.40	88.90
36	88.90	91.94	91.44
37	91.44	94.48	93.98
38	93.98	97.02	96.52
39	96.52	99.56	99.06
40	99.06	102.10	101.60

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

FE-D23E-2Xxx-LF
SERIES
LEADFREE
2X02:04WAY
2X40:80WAY
5 BASE
TOTAL HIGH 23.2mm
DIP 180°

DESCRIPTION: 2.54 FEMALE HEADER DOAL ROWS DIP TYPE CONNECTOR