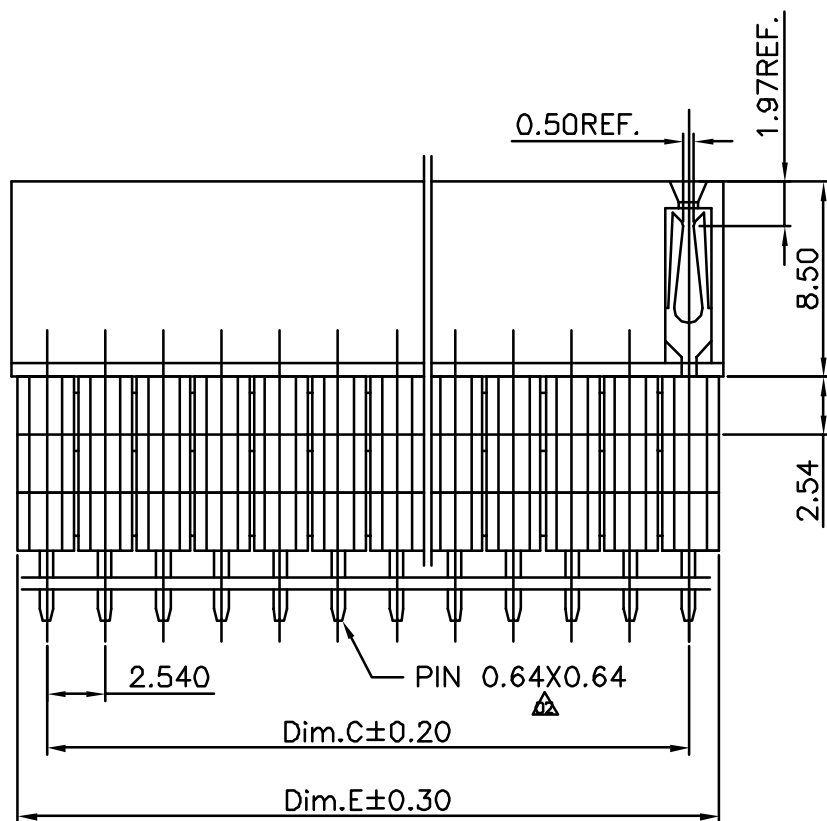
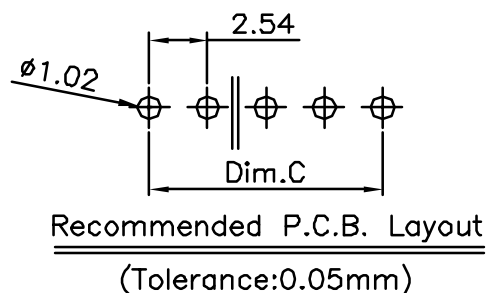
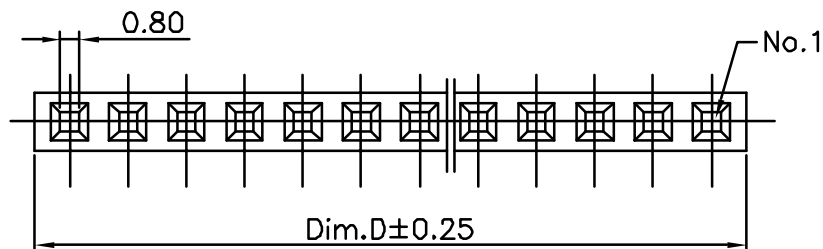


1. Specifications

- 1.1 Current Rating: 3Amp
- 1.2 Insulation Resistance: 1000M Ω Min.
- 1.3 Dielectric Withstanding: 600V AC/DC
- 1.4 Contact Resistance: 20m Ω Max.
- 1.5 Operating Temperature: -40°C to +105°C

2. Materials

- 2.1 Contact Material: Phosphor Bronze
- 2.2 Insulation Material: Polyester, UL 94V-0
 - A=02~24pins use P.B.T Black;
 - 25~40pins use Nylon6T Black
 - B=02~40pins use Nylon6T Black
- 2.3 All materials must be GP materials

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

FE-DxxC-1Xxx-LF
SERIES LEADFREE
2X02:04WAY
2X40:80WAY
BASE x3
DIP 180° 18:16.12+2.3mm
23:16.12+7.1mm

DESCRIPTION: