


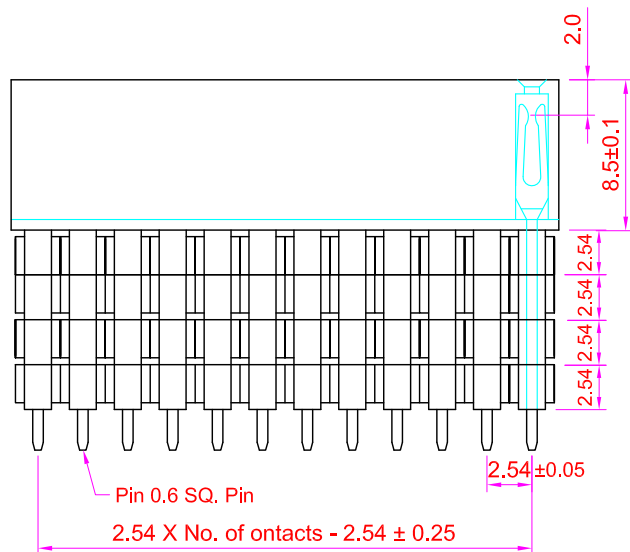
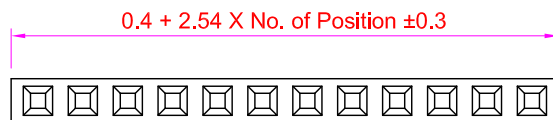





Recommended
P.C. Board Hole Layout




1 Story



2 Stories

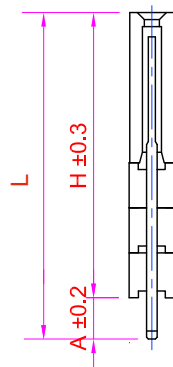

3 Stories

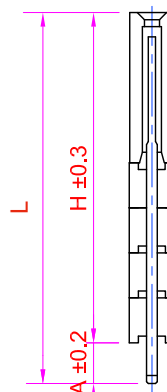

4 Stories

Specifications

Current Rating : 3 Amps

Insulator Resistance : 1000 Megohms min.

Contact Resistance : 20 m ohms max.

Dielectric Withstanding : AC 600V

Operating Temperature : -40°C ~ +105°C

Contact Material : Brass

Insulator Material : Polyester, UL 94V-0 P.B.T.

Option: Nylon-6T

Contact Plated : See Option / Standard: Full Gold Flash

Option

Elevated Story Option	H	A	L
1 BASE	11.04	7.38	18.42
1 BASE	11.04	12.20	23.24
1 BASE	11.04	2.30	13.34
2 BASE	13.58	4.84	18.42
2 BASE	13.58	9.65	23.23
3 BASE	16.12	2.30	18.42
3 BASE	16.12	7.10	23.22
4 BASE	18.66	4.60	23.26
4 BASE	18.66	5.64	24.30

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE


SIZE A4

X: ± 0.50
.X: ± 0.20
.XX: ± 0.10
.XXX: ±
ANG: ±

PPOJECTION

照片框

ORDER INFORMATION

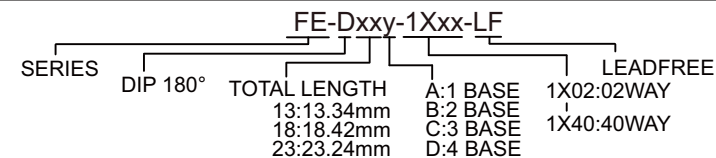

DESCRIPTION: Female Header P2.54mm Elevated Story, Single Row, Straight Type