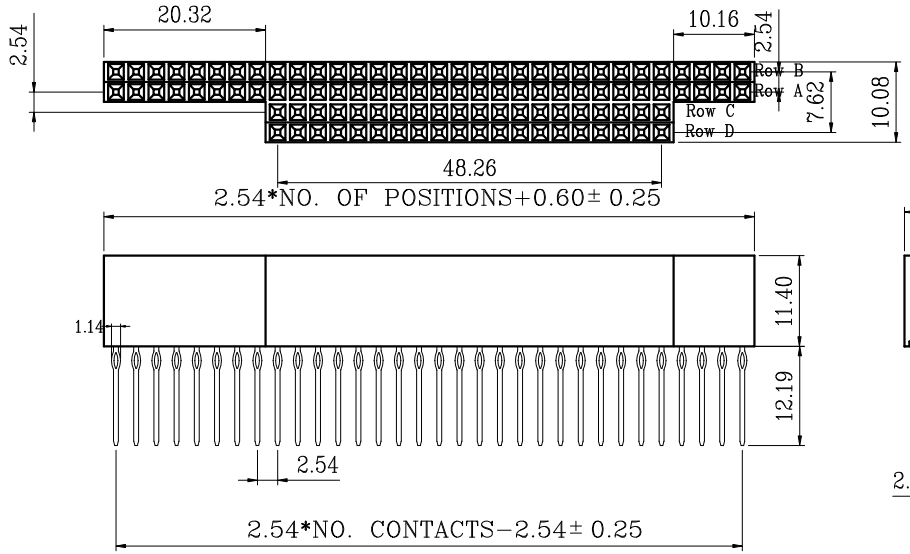

SPECIFICATIONS
CURRENT RATING: 3 AMPS
INSULATOR RESISTANCE: 5000 MEGPHMS MIN.
CONTACT RESISTANCE: 20 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING: AC 500V
OPERATING TEMPERATURE: −25˚C ~ +85˚C

MATERIAL
CONTACT: PHOSPHOR BRONZE (GOLD FLUSH)
INSULATOR: PA−9T, UL 94V−0

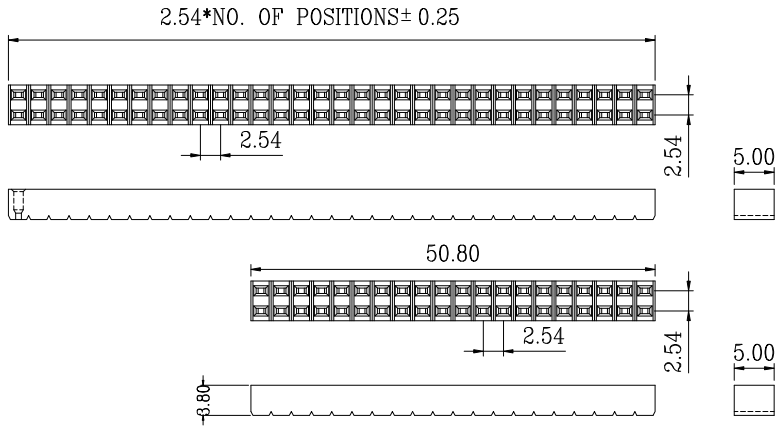

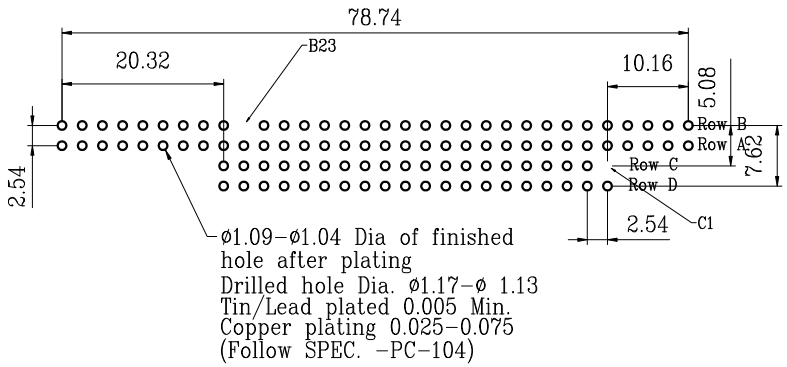

Recommend P.C.B. Layout

TOP View

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ± 0.50 .X ± 0.35 .XX ± 0.25 .XXX ± 0.05 ANG ±
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PPOJECTION	

照片框

ORDER INFORMATION

FE-P23-104102-LF

SERIES
PRESS FIT
TOTAL HIGH 23.9mm
104P 102C
LEADFREE

DESCRIPTION: