


Features:

- Material: Phosphor bronze
- Finished: Tin-plated
- Wire range: #28 ~ #32 AWG
- Thickness: 0.15mm

Specification:

- Current rating: 1A AC, DC (Max.)
- Voltage rating: 100V AC, DC
- Contact resistance: 20mΩ Max.
- Dielectric withstanding voltage: 500V AC/minute
- Temperature range: -25°C ~ 85°C

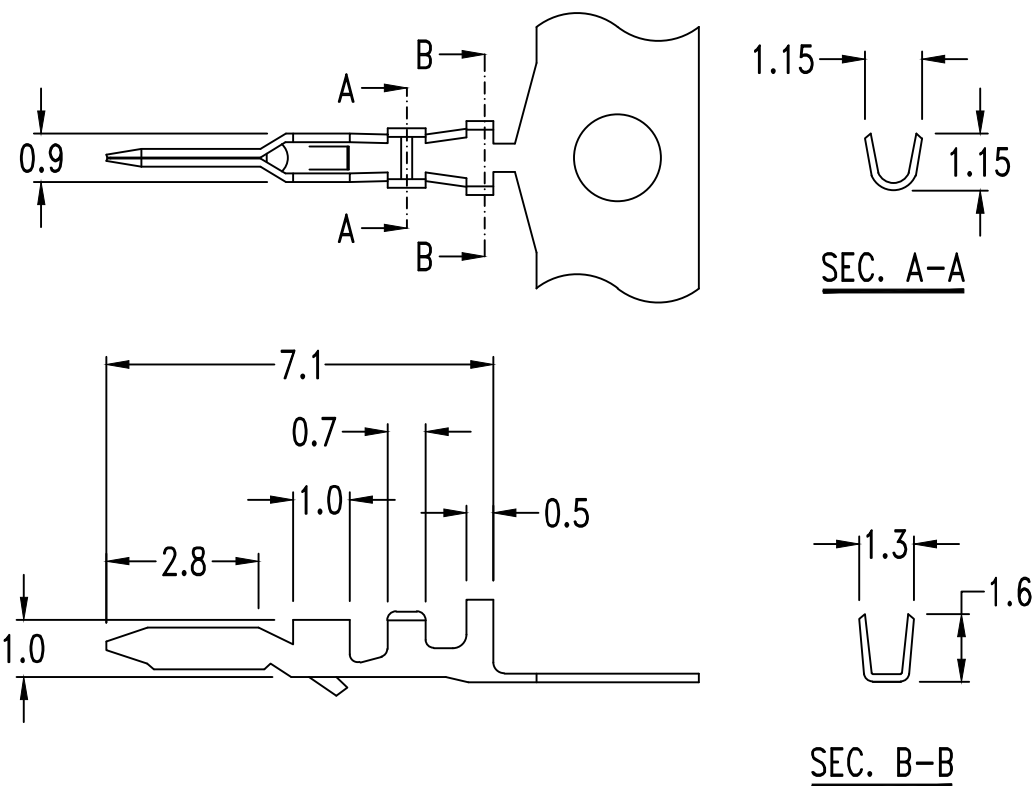

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ±

ORDER INFORMATION

FH-M-28-LF
SERIES | LEADFREE
28~32 AWG
MALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: