


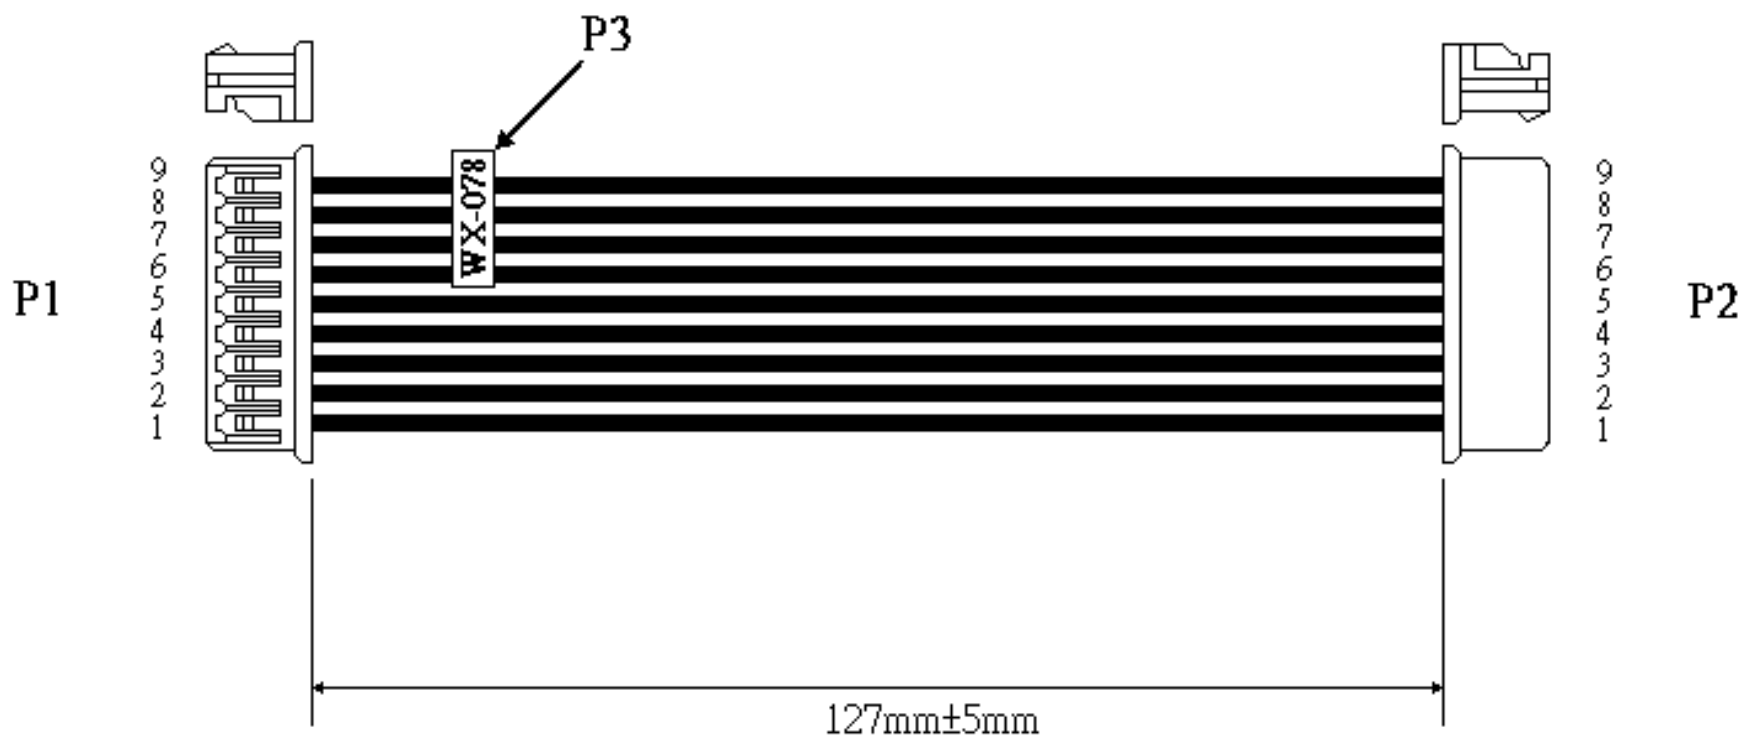

1. P1, P2 : 1.25mm PITCH CRIMP TERMINAL AND HOUSING FH-H-09 COLOR=WHITE
2. P3 : PAPER LABEL
3. WIRE IS UL(1571) 28AWG 80°C 30V PVC JACKET COLOR=BLACK ×9PCS

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG, ±

PPOJECTION

照片框

ORDER INFORMATION

FHX2-090928BK-F5N-LF

SERIES

LEADFREE

127mm




FEMALE TO FEMALE

BLACK

28 AWG

09 TO 09 WAY

DESCRIPTION:

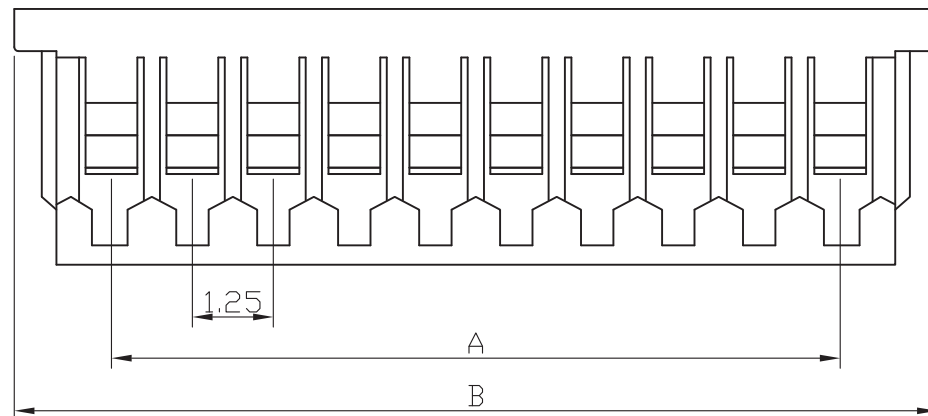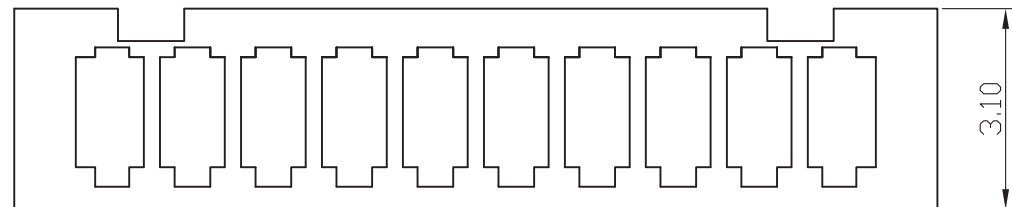

SPECIFICATIONS

Electrical

Current Rating: 1A AC, DC

Voltage Rating: 125V AC/ max.

Operating Temp.: -40°C ~ +85°C

Insulation Resistance: 100MΩ/ min.

Dielectric Withstanding Voltage: 250V AC/ min.

Contact Resistance: 20MΩ/ max.

Material

Material: Nylon66, UL94V-0

Poles	Dimension mm	
	A	B
2	1.25	4.25
3	2.50	5.50
4	3.75	6.75
5	5.00	8.00
6	6.25	9.25
7	7.50	10.50
8	8.75	11.75
9	10.00	13.00
10	11.25	14.25
11	12.50	15.50
12	13.75	16.75
13	15.00	18.00
14	16.25	19.25
15	17.50	20.50

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE


SIZE A4

PPOJECTION



X. ±
.X ±
.XX ±
.XXX ±
ANG ±




ORDER INFORMATION

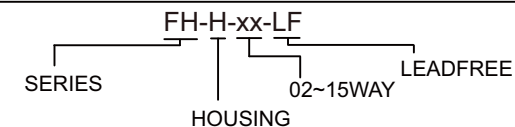


DESCRIPTION: 1.25mm Wire-to-Board Housing

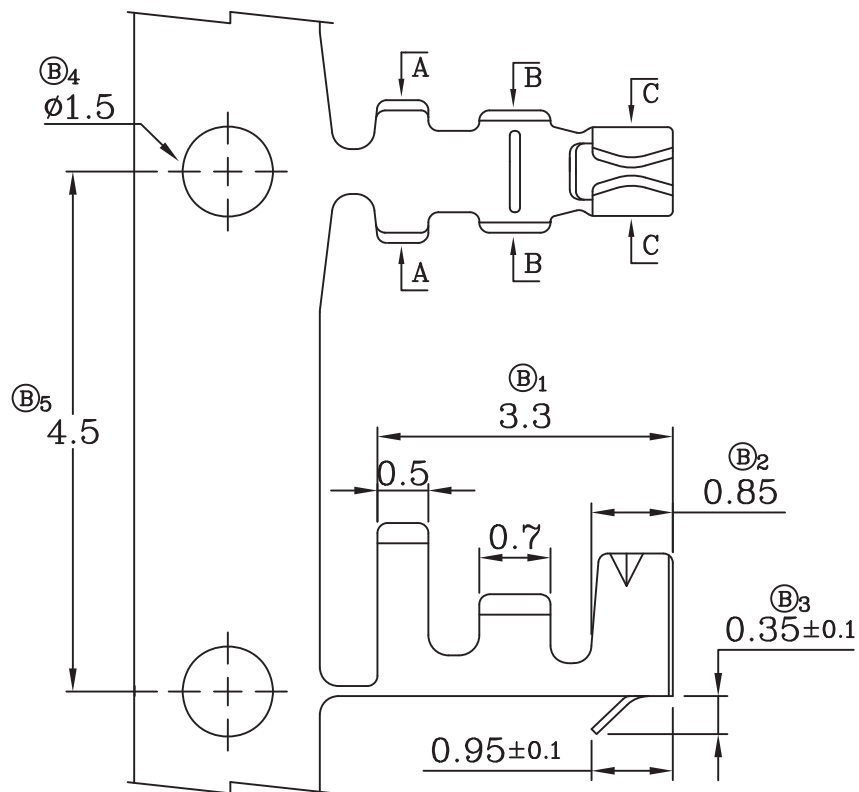

Section A-A



Section B-B



Section C-C

SPECIFICATIONS

Electrical

Current Rating: 1A AC, DC

Voltage Rating: 125V AC/ max.

Operating Temp.: -25°C ~ +85°C

Insulation Resistance: 100M Ω / min.

Dielectric Withstanding Voltage: 250V AC/ min.

Contact Resistance: 20m Ω / max.

Material

Terminal material: Phosphor Bronze/ Tin-plated

Wire Range: 28 to 32AWG

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm

SCALE 1:1

DATE


SIZE A4

PROJECTION

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$



ORDER INFORMATION

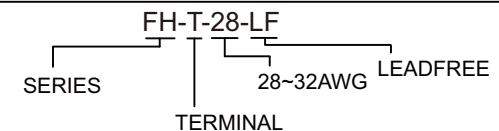

DESCRIPTION: 1.25mm Terminal