


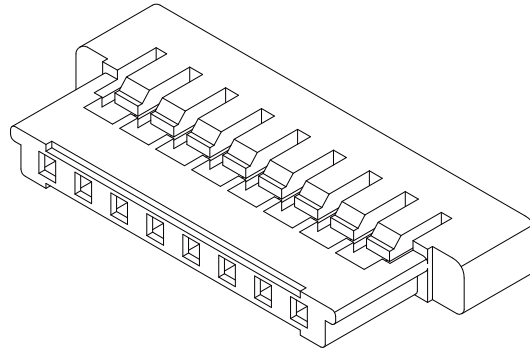

SPECIFICATIONS

Current Rating: 1A AC,DC

Voltage Rating: 100V AC,DC

Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Contact Resistance: $20\text{m}\Omega$ Max.


Insulation Resistance: $500\text{M}\Omega$ Min.

Withstanding Voltage: 500V AC/minute

Material: Nylon 66,UL94V-0

Ordering Information & Dimensions

PART NO.	Dimensions		
	A	B	C
FI-H-02	1.25	3.80	6.00
FI-H-03	2.50	5.05	7.25
FI-H-04	3.75	6.30	8.50
FI-H-05	5.00	7.55	9.75
FI-H-06	6.25	8.80	11.00
FI-H-08	8.75	11.30	13.50
FI-H-10	11.25	13.80	16.00
FI-H-15	17.50	20.05	22.25
FI-H-20	23.75	26.30	28.50
FI-H-25	30.00	32.55	34.75
FI-H-30	36.25	38.80	41.00

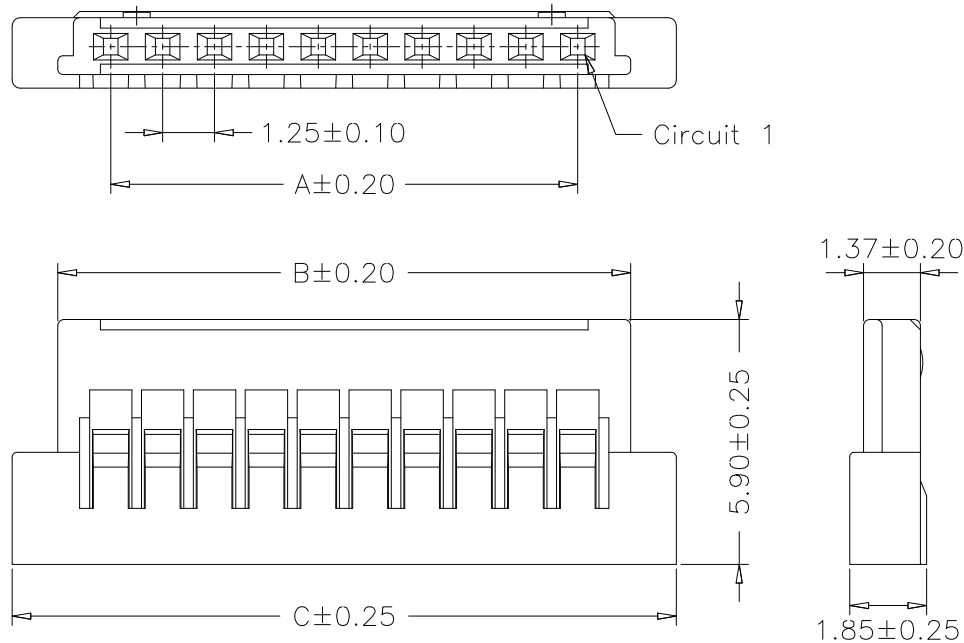

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1


DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

FI-H-xx-LF
SERIES | LEADFREE
02~30 WAY
HOUSING

DESCRIPTION: 1.25mm PITCH HOUSING ULTRA LOW PROFILE