
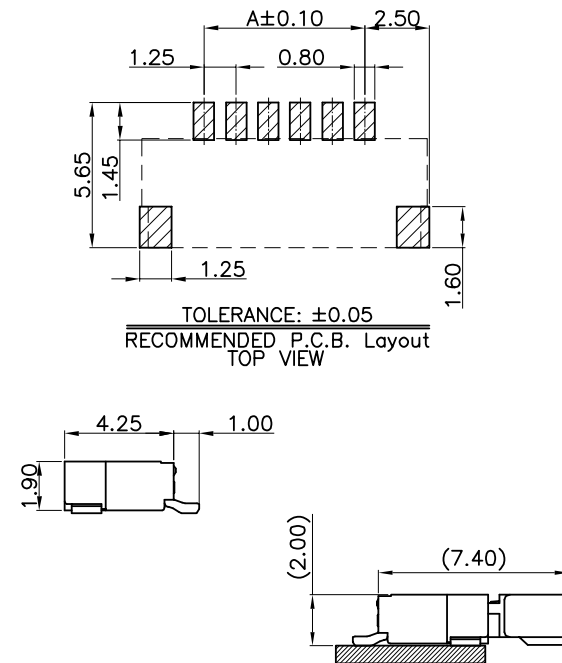


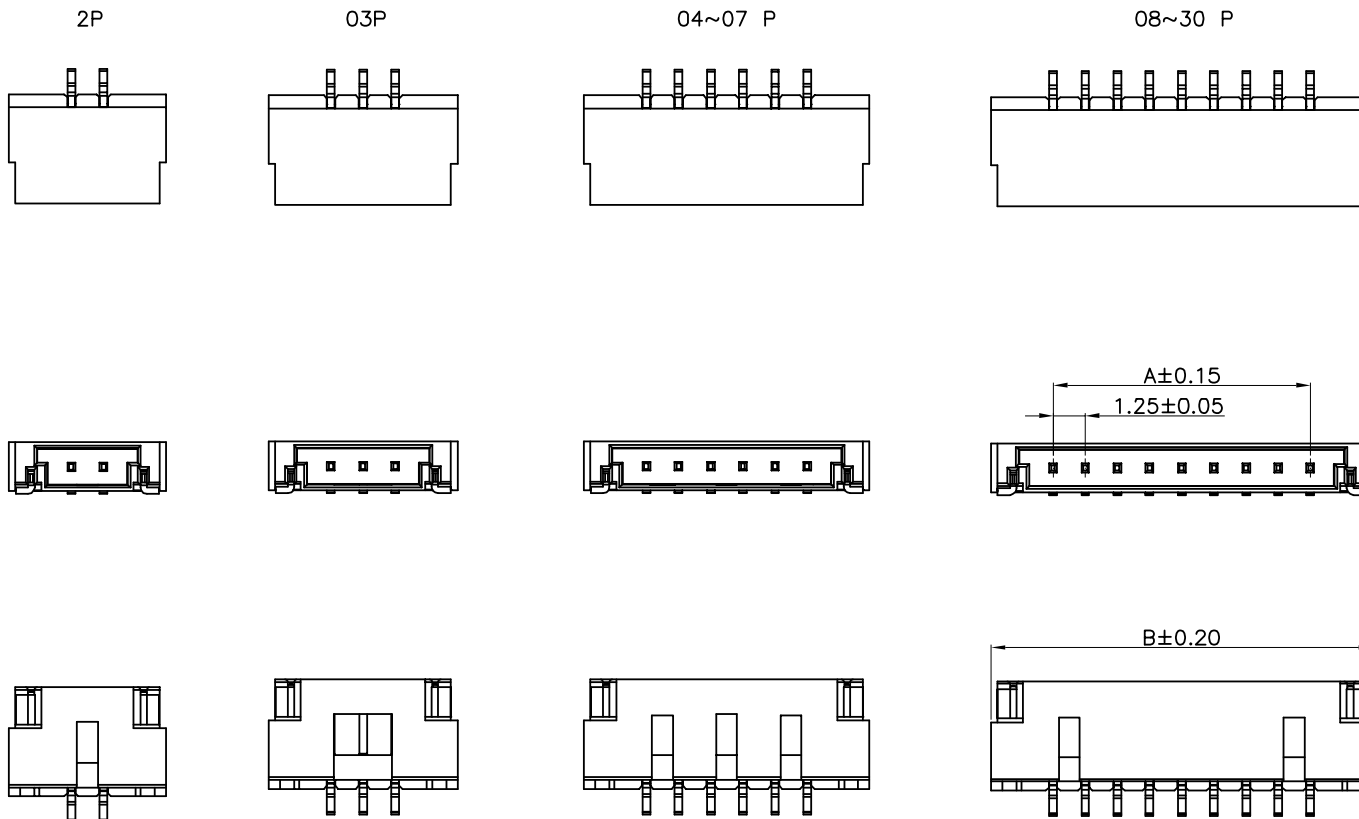

TOLERANCE:  $\pm 0.05$   
RECOMMENDED P.C.B. Layout  
TOP VIEW

Mating Condition (REF.)

- NOTES:
- MATERIAL:  
INSULATION(STANDARD): NYLON 9T, UL94V-0  
INSULATION(HALOGEN FREE): NYLON 9T, UL94V-0  
CONTACT: COPPER ALLOY,  $t=0.30\text{mm}$   
SOLDER TAB: COPPER ALLOY,  $t=0.25\text{mm}$  / MATTE-TIN PLATED OVER NICKEL
  - CONTACT FINISH: (VOID)--MATTE-TIN PLATED OVER NICKEL  
GO--GOLD FLASH OVER NICKEL

| PIN | DIM. (mm) |       | PIN | DIM. (mm) |       |
|-----|-----------|-------|-----|-----------|-------|
|     | A         | B     |     | A         | B     |
| 02  | 1.25      | 6.10  | 09  | 10.00     | 14.85 |
| 03  | 2.50      | 7.35  | 10  | 11.25     | 16.10 |
| 04  | 3.75      | 8.60  | 14  | 16.25     | 21.10 |
| 05  | 5.00      | 9.85  | 15  | 17.50     | 22.35 |
| 06  | 6.25      | 11.10 | 20  | 23.75     | 28.60 |
| 07  | 7.50      | 12.35 | 25  | 30.00     | 34.85 |
| 08  | 8.75      | 13.60 | 30  | 36.25     | 41.10 |

煜倫股份有限公司

www.morethanall.com

**RoHS Compliant**

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X.  $\pm 0.30$

.X  $\pm 0.25$

.XX  $\pm 0.15$

.XXX  $\pm$

ANG  $\pm 3^\circ$



**ORDER INFORMATION**

FI-W-xx-LF

SERIES LEADFREE

02~30WAY

90°SMT

DESCRIPTION: WIRE TO BOARD, PITCH 1.25mm, SINGLE ROW, SMT TYPE, ASSEMBLY