

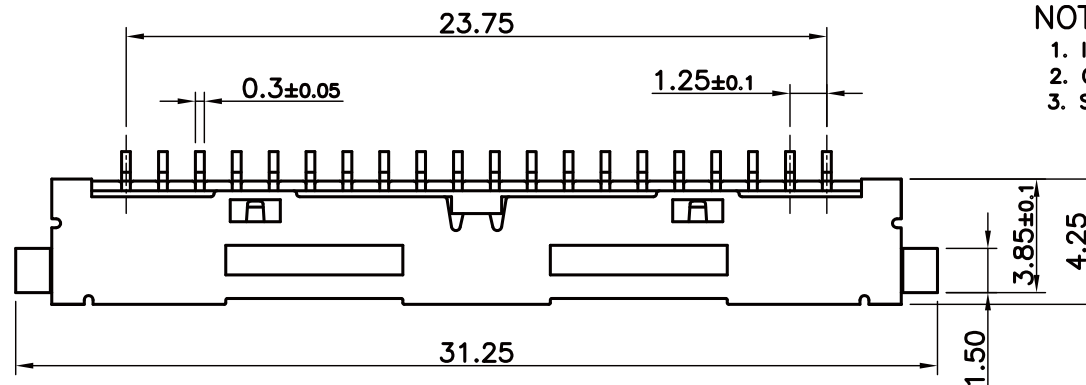





NOTES:

1. INSULATOR: LCP , UL94V-0
2. CONTACT: COPPER ALLOY, 1: TIN PLATED OVER NICKEL(LEADFREE MATTE)
3. SHELL: NICKEL SILVER COPPER

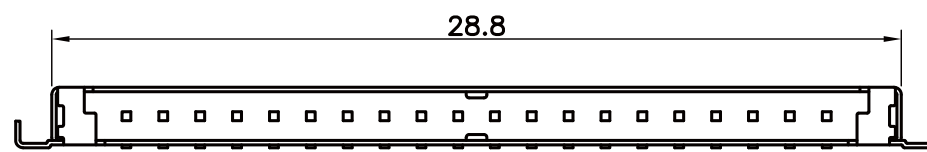

SOLDER AREA Δ 0.10

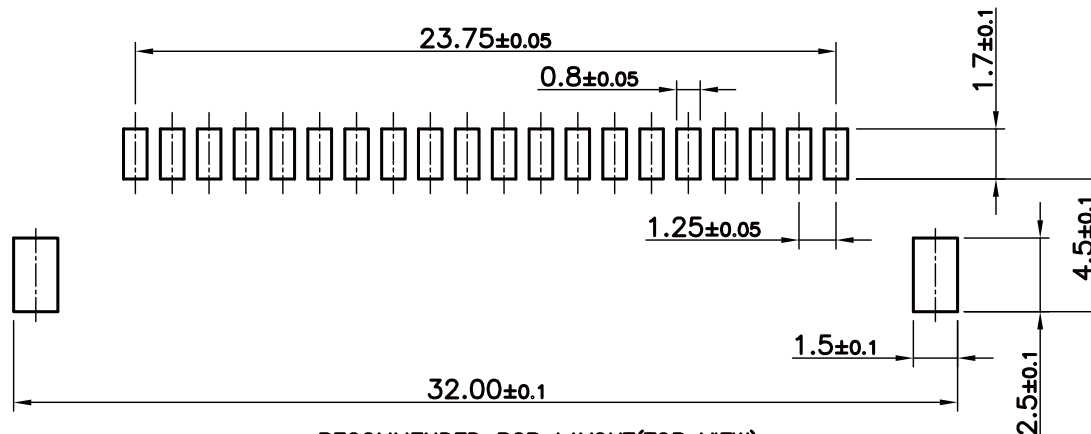

RECOMMENDED PCB LAYOUT(TOP VIEW)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION Φ



X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

FI-WMR-20-LF
SERIES REEL METAL 90°SMT
LEADFREE 20 WAY

DESCRIPTION:1.25mm PH BOARD TO WIRE FOR SHELL CONNECTEOR ON BOARD TYPE

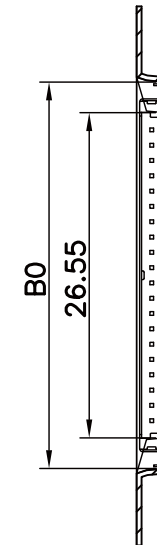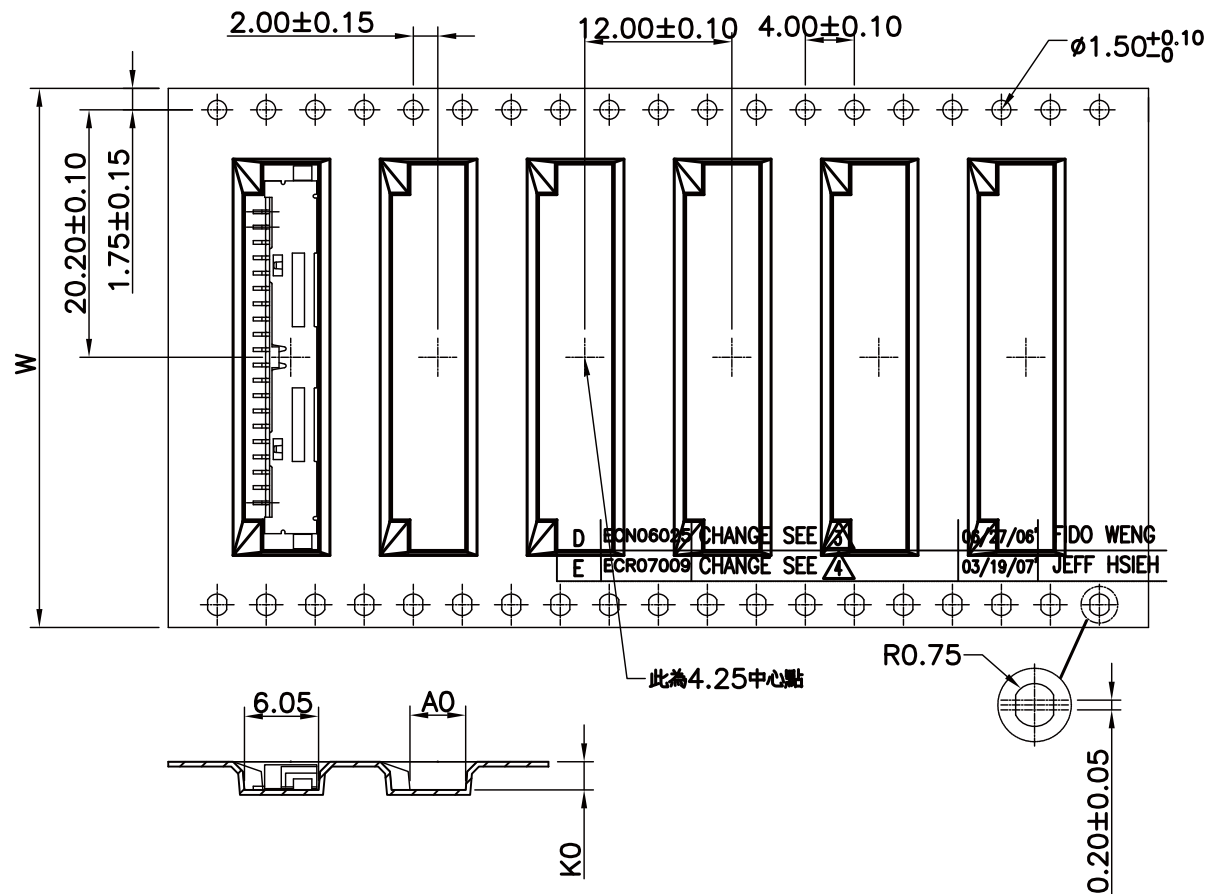

Patent No. 157713

W	44.00±0.30
A0	4.55±0.10
B0	31.55±0.10
K0	2.40±0.10

1. 10 sprocket hole pitch cumulative tolerance ± 0.20 .
2. Carrier camber is within 1 mm in 250mm.
3. Material : Black Conductive Polystyrene Alloy
4. All dimensions meet EIA-481-C requirements.
5. Thickness : 0.30 ± 0.05 mm.
6. Components load per 13" reel : 2000 pcs.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION


X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

FI-WMR-20-LF
SERIES REEL METAL 90°SMT
LEADFREE
20 WAY

DESCRIPTION: 1.25mm PH BOARD TO WIRE FOR SHELL CONNECTEOR ON BOARD TYPE

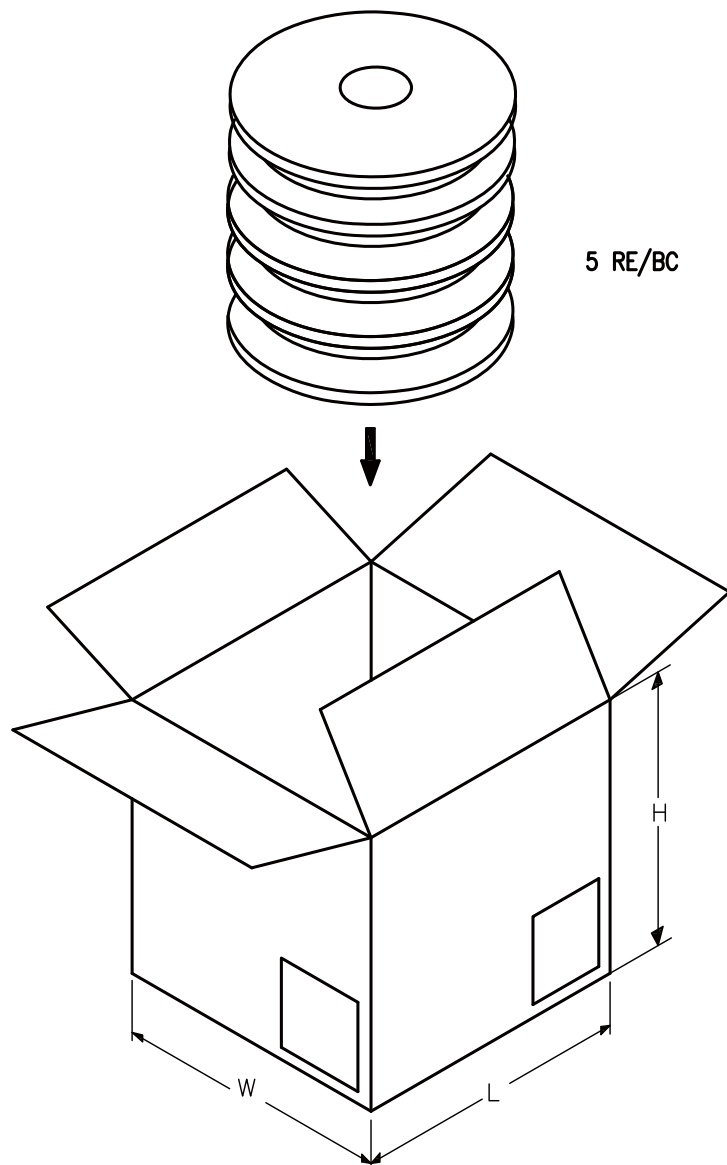

5 RE/BC

PCAKING MATERIAL

PART NAME	DIM(mm)
REEL	330X44.5
BIG CRTON	350X350X340

PCAKING CAPACITY

PART NO.	PCS/RE	RE/BC	PCS/BC
△	2000PCS/RE	5 RE/BC	10000 PCS/BC

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FI-WMR-20-LF
SERIES T T T LEADFREE
20 WAY
REEL
METAL
90°SMT

DESCRIPTION: 1.25mm PH BOARD TO WIRE FOR SHELL CONNECTOR ON BOARD TYPE