
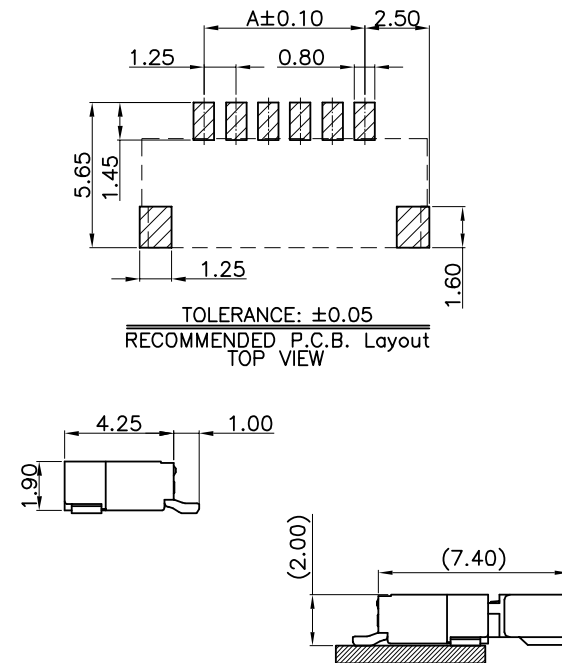


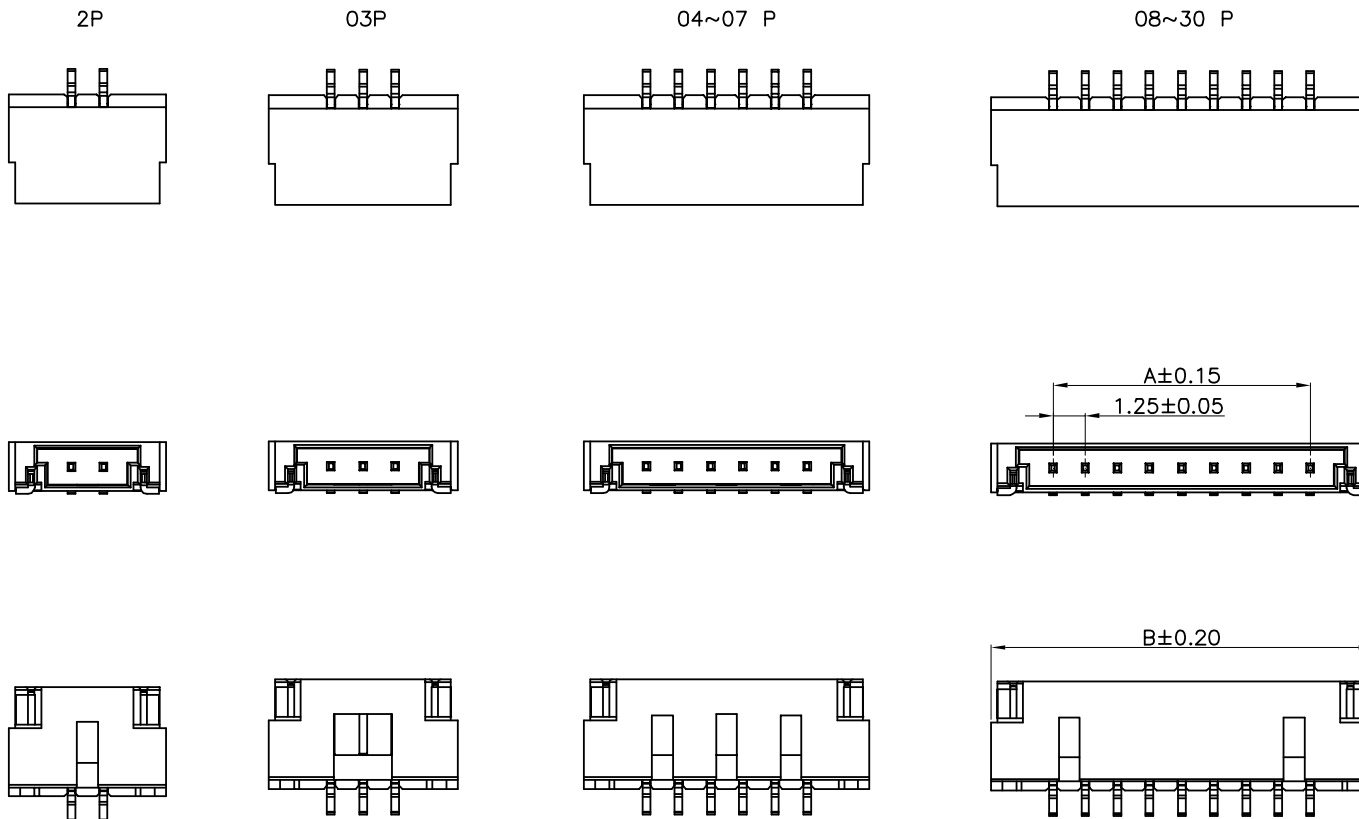

TOLERANCE: ± 0.05
RECOMMENDED P.C.B. Layout
TOP VIEW

Mating Condition (REF.)

- NOTES:
- MATERIAL:
INSULATION(STANDARD): NYLON 9T, UL94V-0
INSULATION(HALOGEN FREE): NYLON 9T, UL94V-0
CONTACT: COPPER ALLOY, $t=0.30\text{mm}$
SOLDER TAB: COPPER ALLOY, $t=0.25\text{mm}$ / MATTE-TIN PLATED OVER NICKEL
 - CONTACT FINISH: (VOID)--MATTE-TIN PLATED OVER NICKEL
GO--GOLD FLASH OVER NICKEL

PIN	DIM. (mm)		PIN	DIM. (mm)	
	A	B		A	B
02	1.25	6.10	09	10.00	14.85
03	2.50	7.35	10	11.25	16.10
04	3.75	8.60	14	16.25	21.10
05	5.00	9.85	15	17.50	22.35
06	6.25	11.10	20	23.75	28.60
07	7.50	12.35	25	30.00	34.85
08	8.75	13.60	30	36.25	41.10

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.30

.X ± 0.25

.XX ± 0.15

.XXX $\pm$

ANG $\pm 3^\circ$

PPOJECTION



ORDER INFORMATION

FI-WR-xx-LF

SERIES


LEADFREE

02~30WAY

REEL

90°SMT






DESCRIPTION: WIRE TO BOARD, PITCH 1.25mm, SINGLE ROW, SMT TYPE, ASSEMBLY

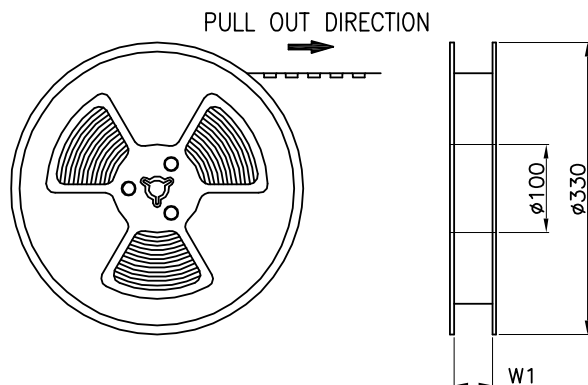

PIN	DIM. (mm)					
	B0	B1	F	W	W1	S
02	6.40	2.25	7.50	16.00	16.50	/
03	7.65	3.50				
04	8.90	4.75				
05	10.15	6.00				
06	11.40	7.25	11.50	24.00	24.50	
07	12.65	8.50				
08	13.90	9.75				
09	15.15	11.00				
10	16.40	12.25				
14	21.40	17.25				
15	22.65	18.50	14.20	32.00	32.50	
20	28.90	24.75	20.20	44.00	44.50	40.40
25	35.15	31.00	26.20	56.00	56.50	52.40
30	41.40	37.25				

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.20
2. CARRIER CAMBER IS WITHIN 1 mm IN 250 mm
3. MATERIAL : BLACK CONDUCTIVE POLYSTYRENE ALLOY.(UP-5000)
4. ALL DIMENSIONS MEET EIA-481-C REQUIREMENTS
5. THICKNESS : 0.35 ± 0.05 mm
6. COMPONENT LOAD PER 13" REEL : 2000 PCS

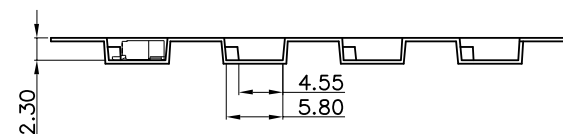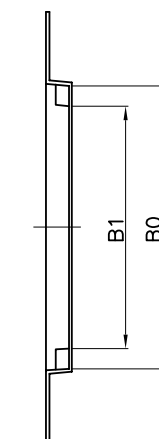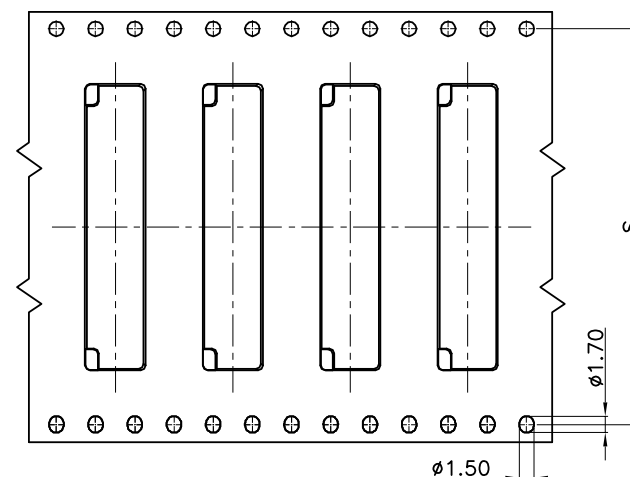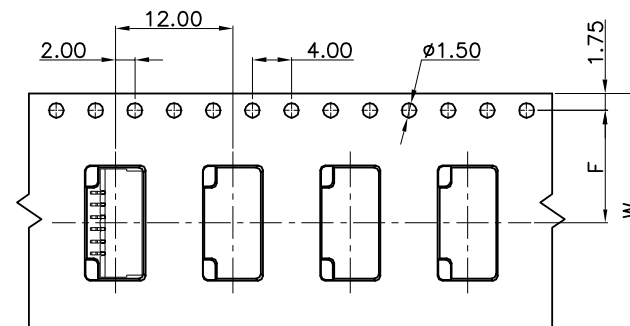

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.25
.XX $\pm$ 0.15
.XXX $\pm$
ANG $\pm$ 3°

PPOJECTION

照片框




ORDER INFORMATION

FI-WR-xx-LF
SERIES T LEADFREE
02~30WAY
REEL
90°SMT

DESCRIPTION:

PACKING MATERIAL	
PART NAME	DIM. (mm)
REEL	Ø330*(W+0.5)
CARTON	350*350*340

PACKING CAPACITY			
PIN	PCS/RE	RE/BC	PCS/BC
02~04	2000PCS/RE	14RE/BC	28,000PCS/BC
05~10	2000PCS/RE	10RE/BC	20,000PCS/BC
14~15	2000PCS/RE	8RE/BC	16,000PCS/BC
20	2000PCS/RE	6RE/BC	12,000PCS/BC
25~30	2000PCS/RE	5RE/BC	10,000PCS/BC

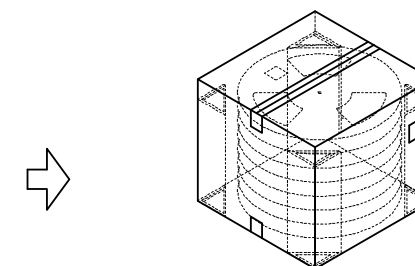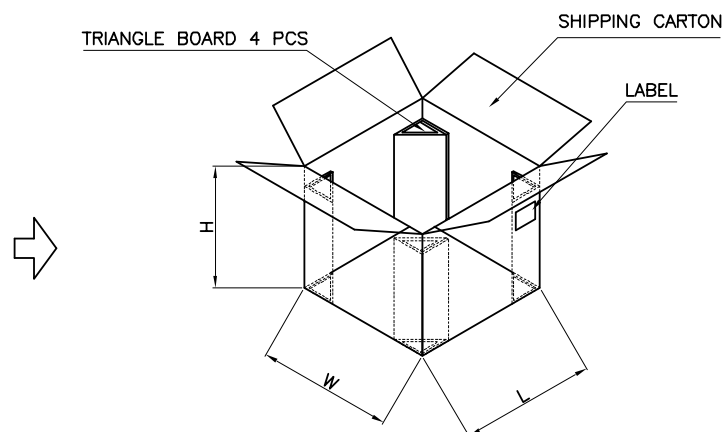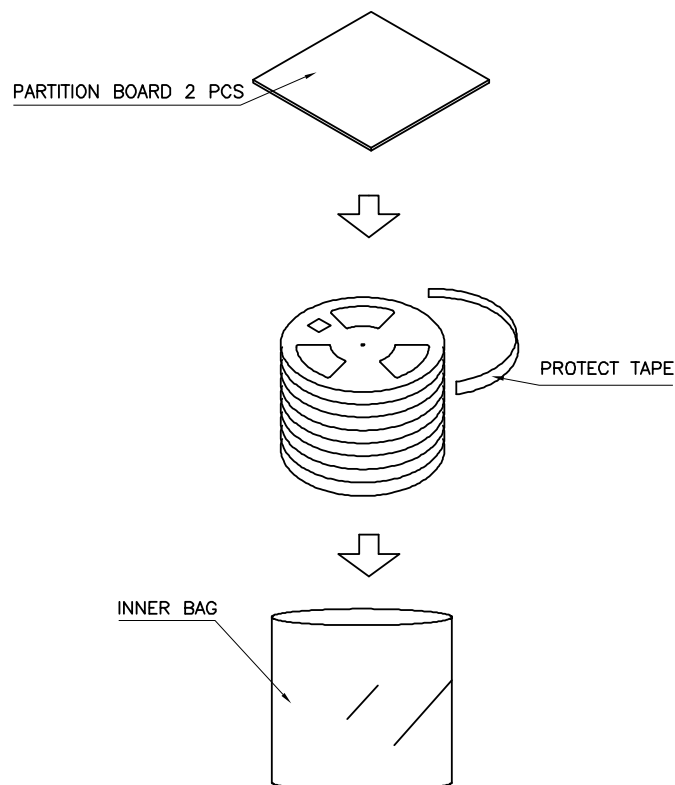

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X ± 0.25

.XX ± 0.15

.XXX ±

ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

FI-WR-xx-LF
SERIES REEL
LEADFREE
02~30WAY
90°SMT

DESCRIPTION: