

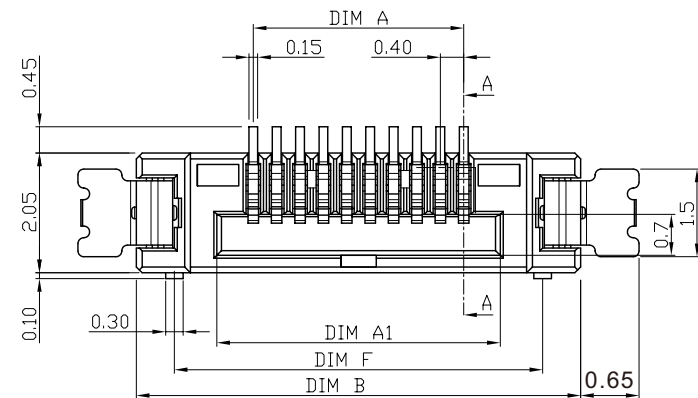
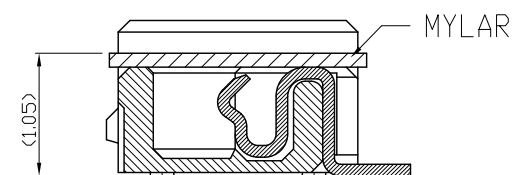
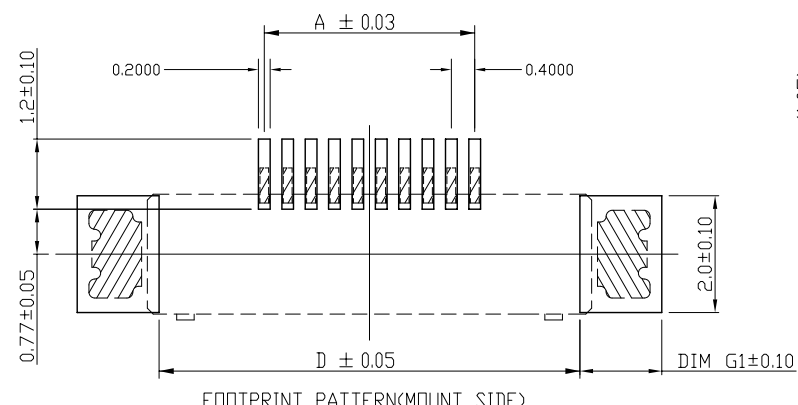



- NOTES:
1. MATERIAL:
 - 1.1 HOUSING: THERMOPLASTIC, HIGH TEMP., UL94V-0; COLOR:NATURAL.
 - 1.2 CONTACT: COPPER ALLOY
 - 1.3 SHELL: COPPER ALLOY
 2. FINISH:
 - CONTACT: <A>. 3u" MIN GOLD ON CONTACT
 - <C>. 15u" MIN GOLD ON CONTACT
 - SOLDER: <A,C>. GOLD FLASH.
 - UNDERPLATING: 50~100u" NICKEL OVERALL.
 - FITTING NAIL: 100u" MATTE TIN
 - UNDERPLATING: 50~100u" NICKEL OVERALL.
 3. REFLOW SOLDER CAPABLE TO 260°C



SECTION A-A
SCALE 2:1



CKTS	DIM A	DIM B	DIM D	DIM E	DIM F	DIM A1
10	3.60	7.60	7.2	5.2	6.3	4.85
12	4.40	8.40	8.0	6.0	7.1	5.65
14	5.20	9.20	8.8	6.8	7.9	6.45
20	7.60	11.60	11.2	9.2	10.3	8.85
30	11.60	15.60	15.2	13.2	14.3	12.85

RoHS Compliant

TOLERANCES ARE




DRAWING BY CY		X. ± 0.50 X. ± 0.25 .XX ± 0.15 .XXX ± 0.10 ANG ± 2°
CHECKED BY GENIUS		
UNIT / mm	SCALE 1:1	
DATE		
SIZE A4		PPOJECTION

煜倫股份有限公司

www.morethanall.com

照片框

ORDER INFORMATION



DESCRIPTION: 0.4mm WTB COAX. Rept Conn.