


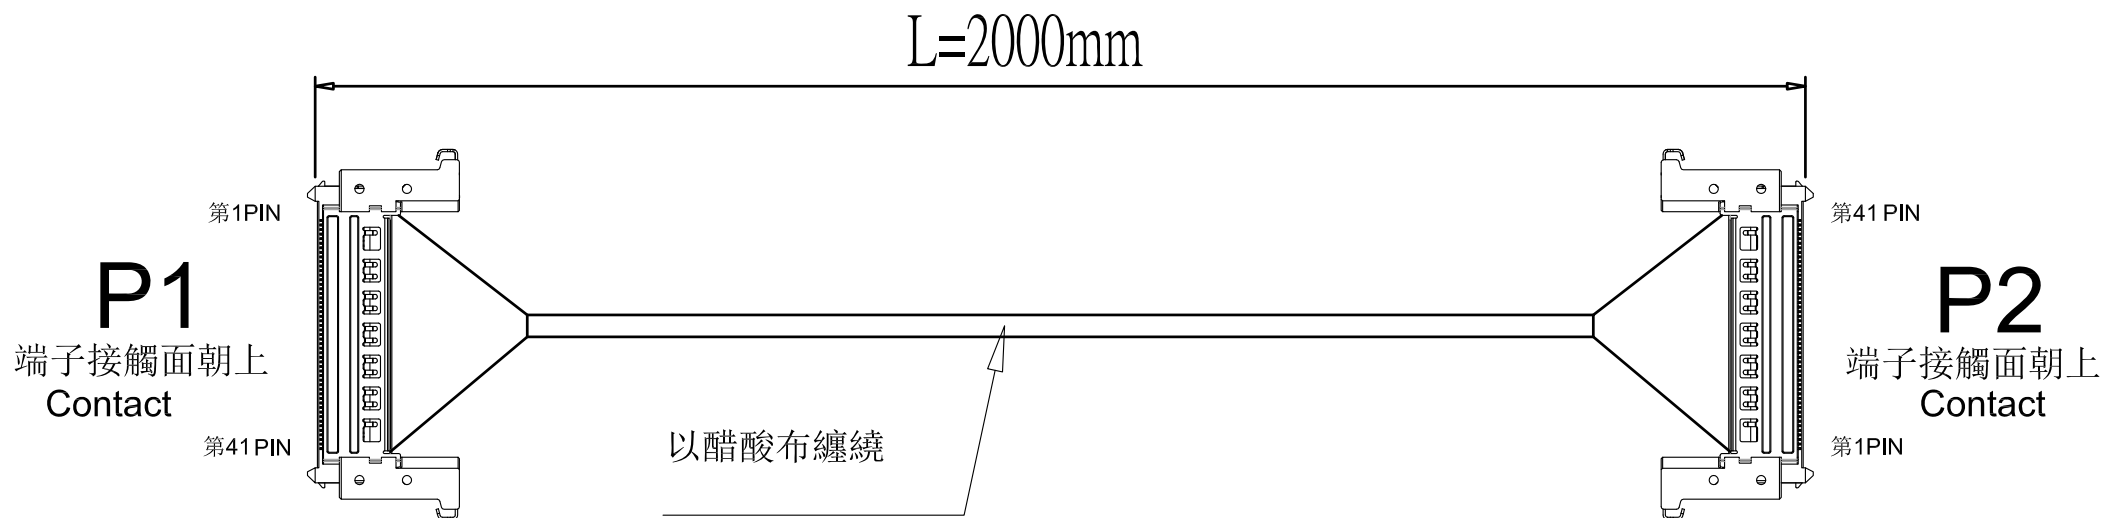

Notes:

USE FI-R41 PIN Define
不絞線

ITEM	Part Name	Q'TY	Part NO	PIN DEFINE								
P1	Connector	1	仿JAE FI-R41 Solder type	1	2	3	⇒	39	40	41		
P2	Connector	1	仿JAE FI-R41 Solder type	41	40	39	⇒	3	2	1		

****線材種類:**

TFL 鐵氟龍(UL10064)
(32AWG OD:0.4mm)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ± 0.35

.X, ± 0.25

.XX, ± 0.15

.XXX, ± 0.05

ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

FIRX2-414132-M2M-LF

SERIES

LEADFREE

2000mm

MALE TO MALE

32 AWG

41 TO 41 WAY

DESCRIPTION: