



WIRE #28-#32




SECTION A-A




SECTION B-B


WIRE #30-#34



SECTION A-A



SECTION B-B

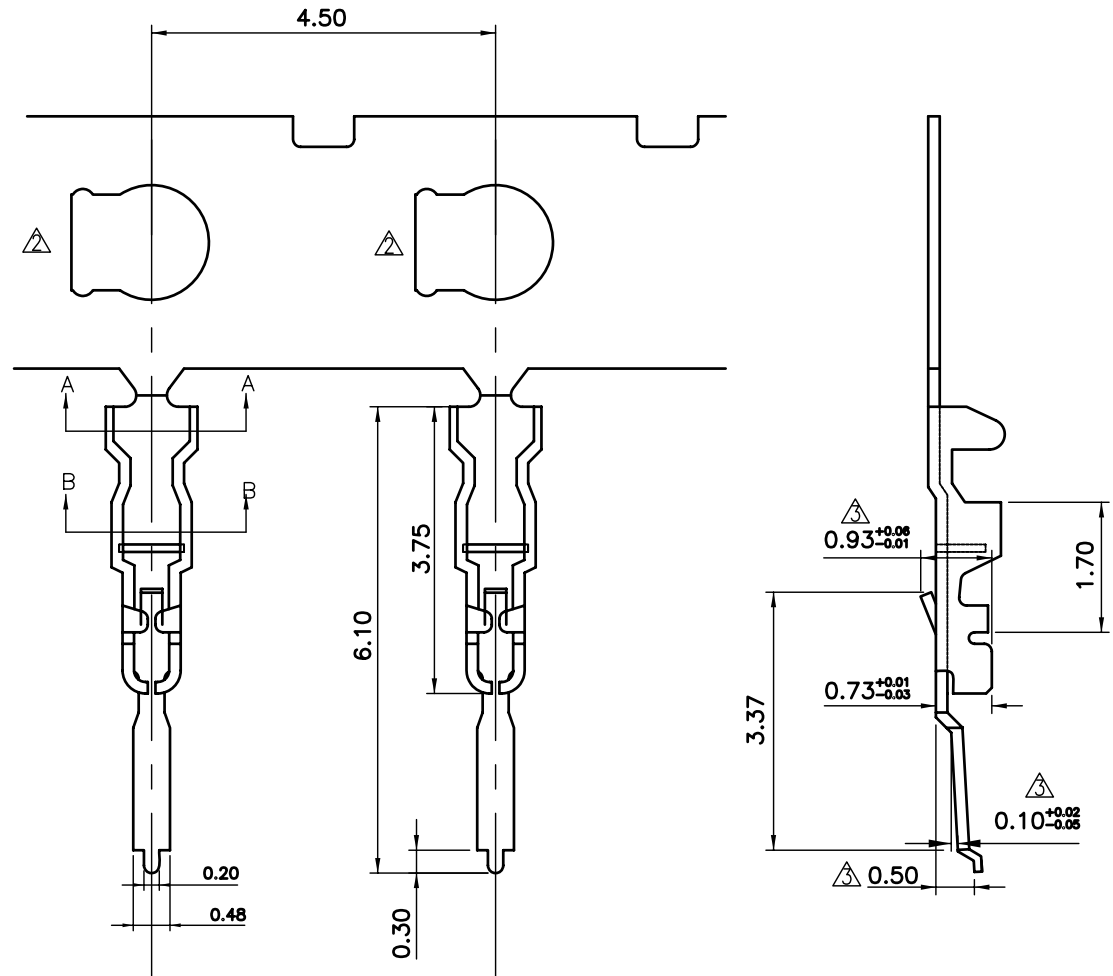

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION



X. ± 0.35
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG $\pm 3^\circ$

照片框


ORDER INFORMATION

FIX-TG-xx-LF
SERIES
LEADFREE
28:28~32AWG
30:30~34AWG
GOLD
TERMINAL

DESCRIPTION: 1.0mm PH WIRE TO BOARD CONTACT

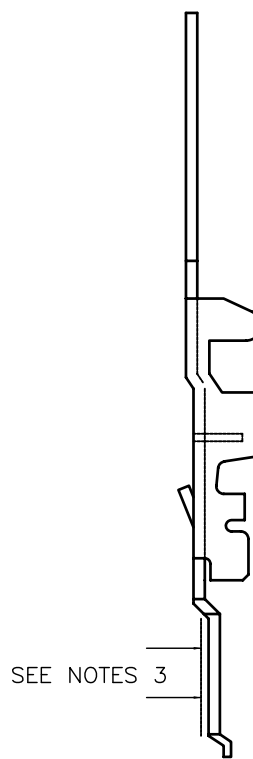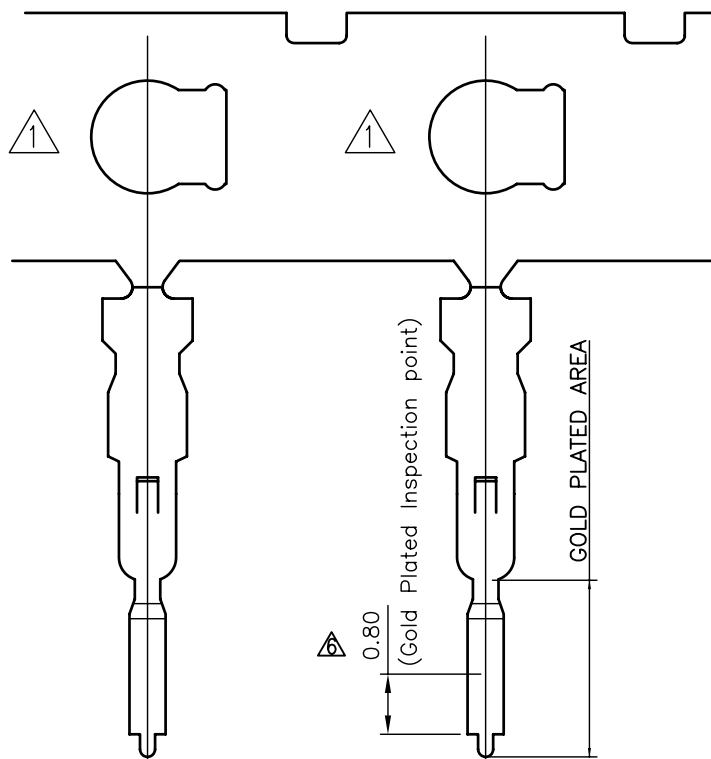

SEE NOTES 3

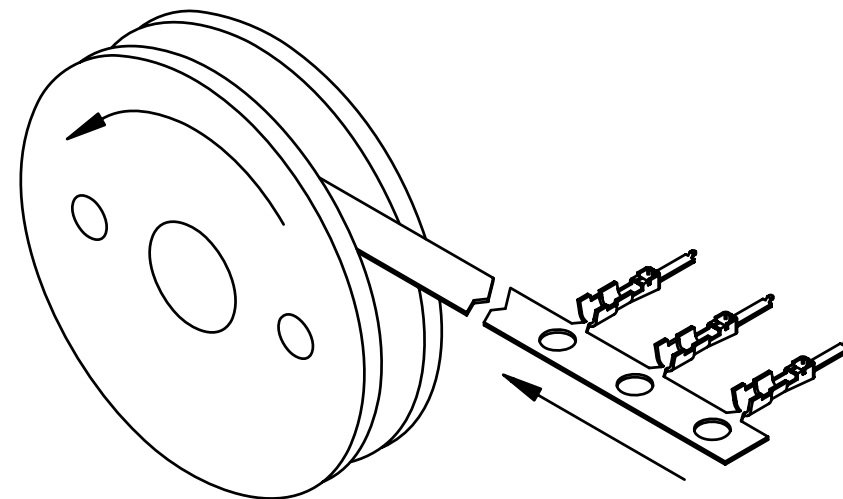

NOTES:

1. MATERIAL: COPPER ALLOY , $t=0.15\text{mm}$
FINILSH: 0. UNPLATED.
 - △1. 5u" GOLD ON CONTACT AREA , GOLD FLASH ON OTHER AREA BOTH OVER 50u" NICKEL.
 - △2. 5u" GOLD ON CONTACT AREA ,OVER 50u" NICKEL.
 - △3. 10u" GOLD ON CONTACT AREA , GOLD FLASH ON OTHER AREA BOTH OVER 50u" NICKEL.
2. APPLICABLE WIRE SIZE:STANDARD #28 TO #32 AWG TO #34 AWG
- △3. CONTACT AREA, NOT BE ANY DAMAGED.
- △4. PACKING: 15K/REEL, 5 REELS/BC

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.35
X. ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG $\pm 3^\circ$

PPOJECTION

照片框

ORDER INFORMATION

FIX-TG-xx-LF
SERIES | LEADFREE
28:28~32AWG
30:30~34AWG
GOLD
TERMINAL

DESCRIPTION: