


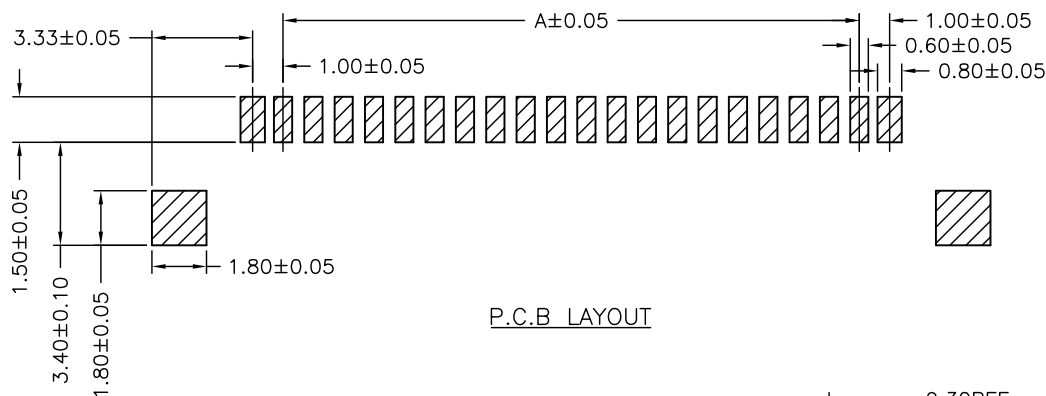
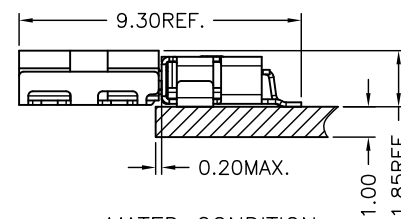
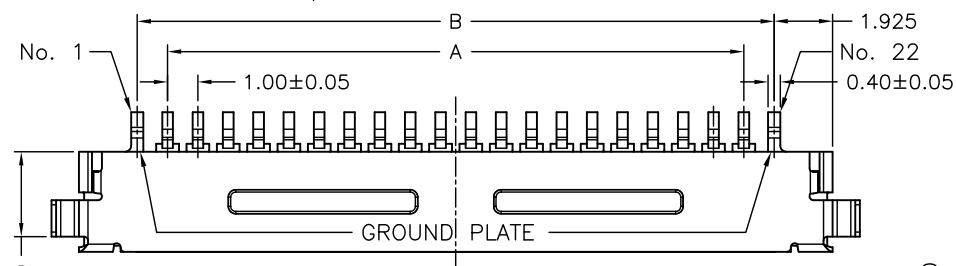
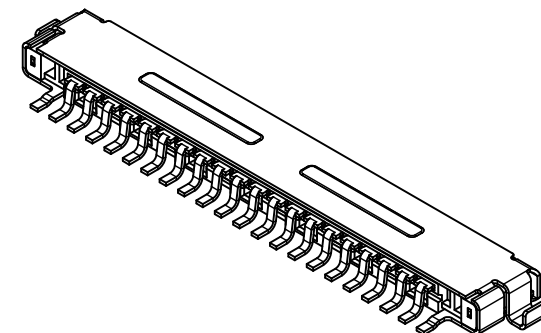
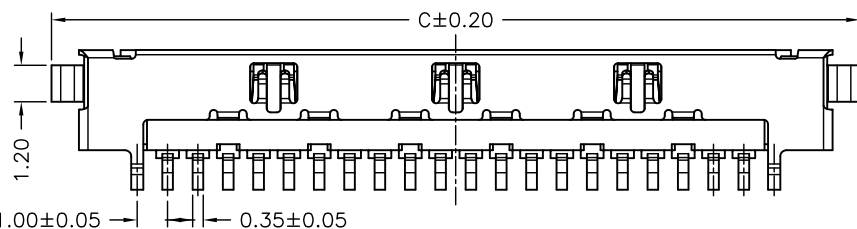




P.C.B LAYOUT



MATED CONDITION

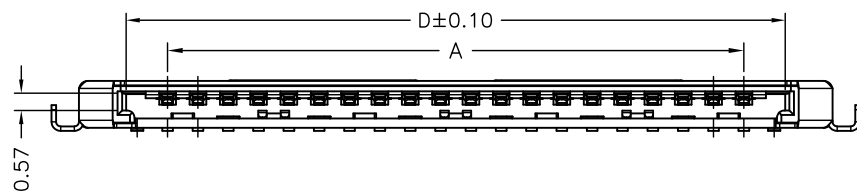

SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 200V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 40mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Phosphor Bronze/Gold-plated
Material: LCP,UL94V-0
Shell: Phosphor Bronze/Tin-plated
Color: Natural(Beige)

Circuit No.	Dimensions			
	A	B	C	D
20P	19.00	21.00	26.65	22.00
30P	29.00	31.00	36.65	32.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ±







PPOJECTION

照片框

ORDER INFORMATION

FIX-WXR-xx-LF
SERIES T T LEADFREE
20.30 WAY
REEL
NON POST
90°SMT

DESCRIPTION: 1.00mm PITCH 90° WAFER-SMT TYPE

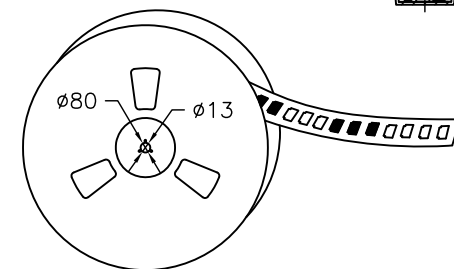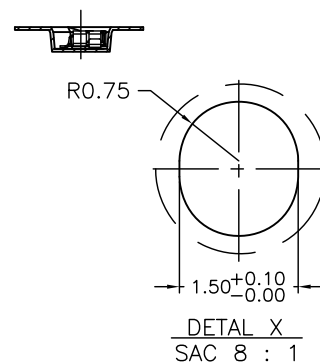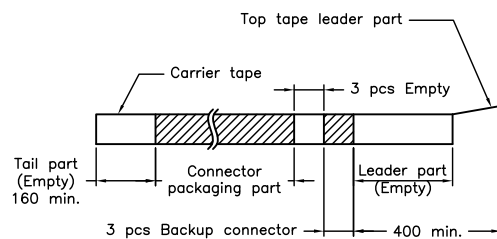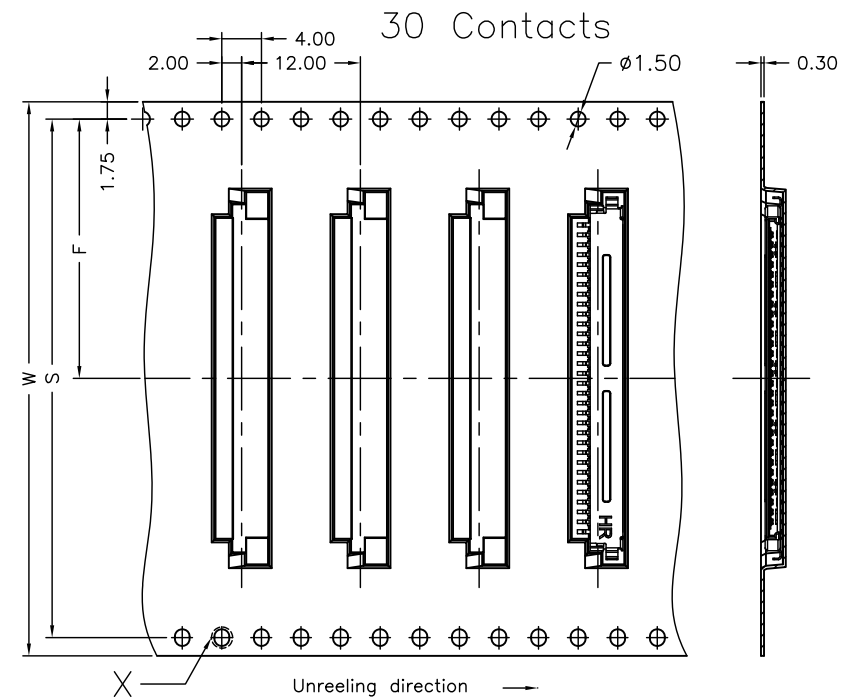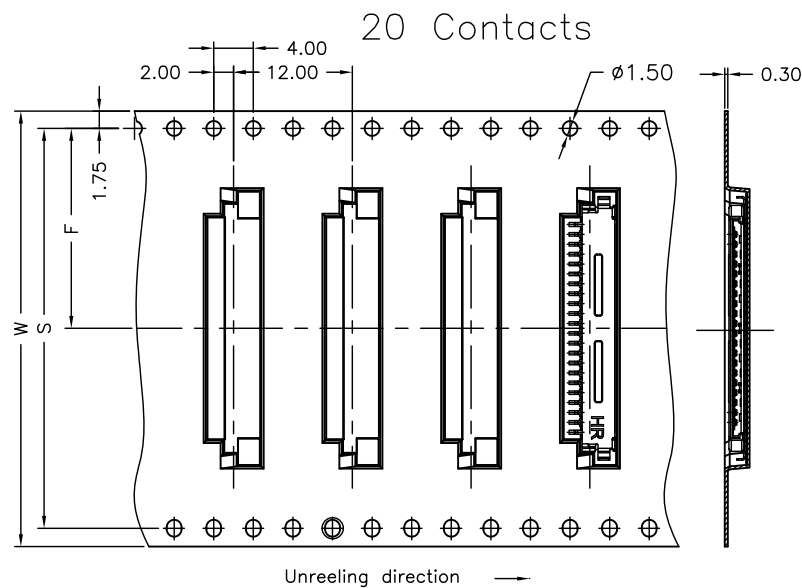

mber of ontacts	W±0.3	F±0.1	S±0.1	Q'ty/Reel
20P	44	20.20	40.40	2,000
30P	56	26.20	52.40	2,000

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ±

照片框

ORDER INFORMATION

FIX-WXR-xx-LF

SERIES T LEADFREE
20.30 WAY
REEL
NON POST
90°SMT

DESCRIPTION: 1.00mm PITCH 90° WAFER-SMT TYPE