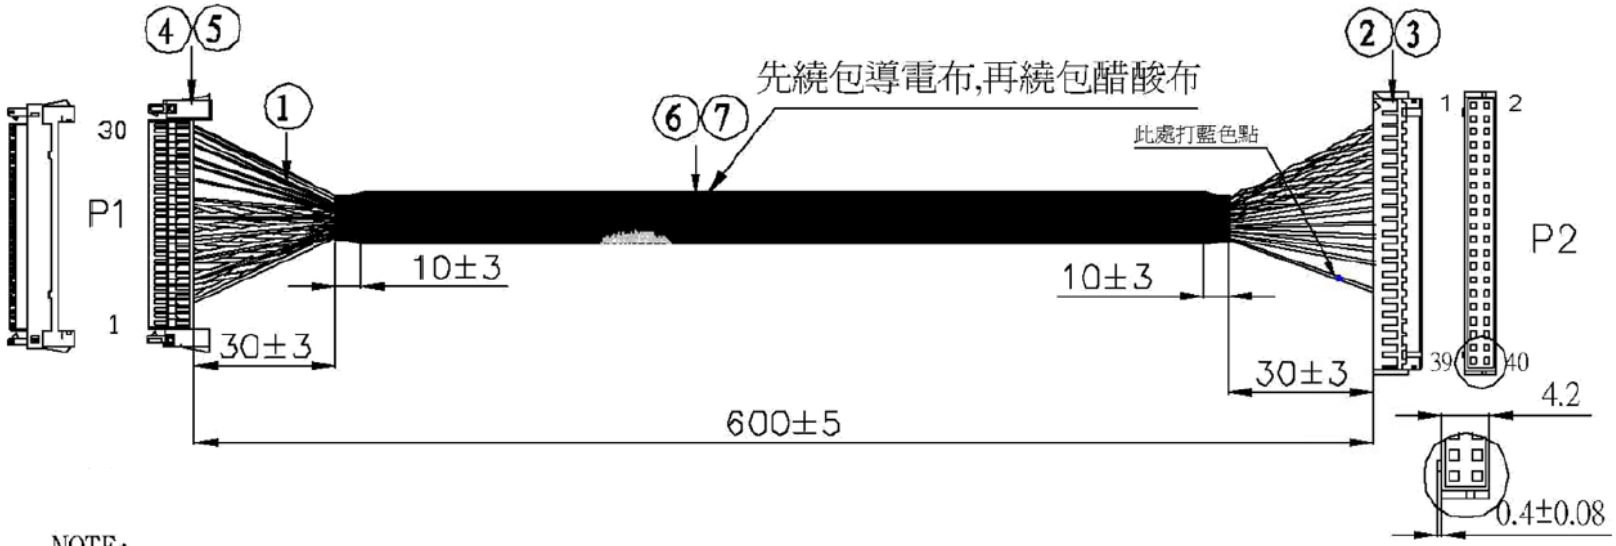

WIRING TABLE

P1	WIRE COLOR		P2
1	NC		
2	NC		
3	NC		
4	BLACK		13
5	BROWN	TWIST	10
6	WHITE	PAIR	9
7	RED		14
8	ORANGE	TWIST	8
9	WHITE	PAIR	7
10	YELLOW		15
11	GREEN	TWIST	6
12	WHITE	PAIR	5
13	BLUE		16
14	PURPLE	TWIST	12
15	WHITE	PAIR	11
16	GRAY		17
17	BLACK	TWIST	4
18	WHITE	PAIR	3
19	BROWN		18
20	NC		
21	ORANGE		28
22	NC		
23	YELLOW		23
24	GREEN		24
25	NC		
26	NC		
27	RED		19
28	RED		20
29	RED		21
30	RED		22

NOTE:

1. 所用材料全部符合ROHS要求.
2. 100%導通測試，不可有短路，斷路錯位及間歇性接觸不良
3. 出貨時產品外箱需貼UL橙色標簽 UL E136432 FORM N
4. 內部導電膠布短於外醋酸膠布.導電布不可外露.
5. 出貨時P1端需單獨用汽泡布包裹HOUSING.
6. 對絞線需絞線100±10圈.對絞線差動阻抗為100±20?

ITEM	DESCRIPTION	SPECIFICATION	UNIT	Q'TY
7	CONDUCTIVE ADHESIVE TAPE	W:20mm*L:600mm GRAY	PC	1
6	ACETATE TAPE	W:20mm*L:620mm BLACK	PC	1
5	HOUSING	**FIX-H-30**	PC	1
4	TERMINAL	**FIX-T**	PCS	23
3	HOUSING	**PHD-H-40**	PC	1
2	TERMINAL	**PHD-T-24**	PCS	23
1	WIRE	UL 1571#28 OD:0.6mm	PCS	23

FIXPHD-3040-E60C-LF

LEADFREE

RoHS Compliant

MORETHANALL CONNECTORS ASSEMBLIES

煜倫股份有限公司

PART NO.FIXPHD-3040-E60C				
DWG NO. FIXPHD-3040-E60C	CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION:	
FILE NO.	DRAWING BY			
UNIT / mm SCALE 1:1	PROJECTION		AREA	REVISIONS HK DATE