


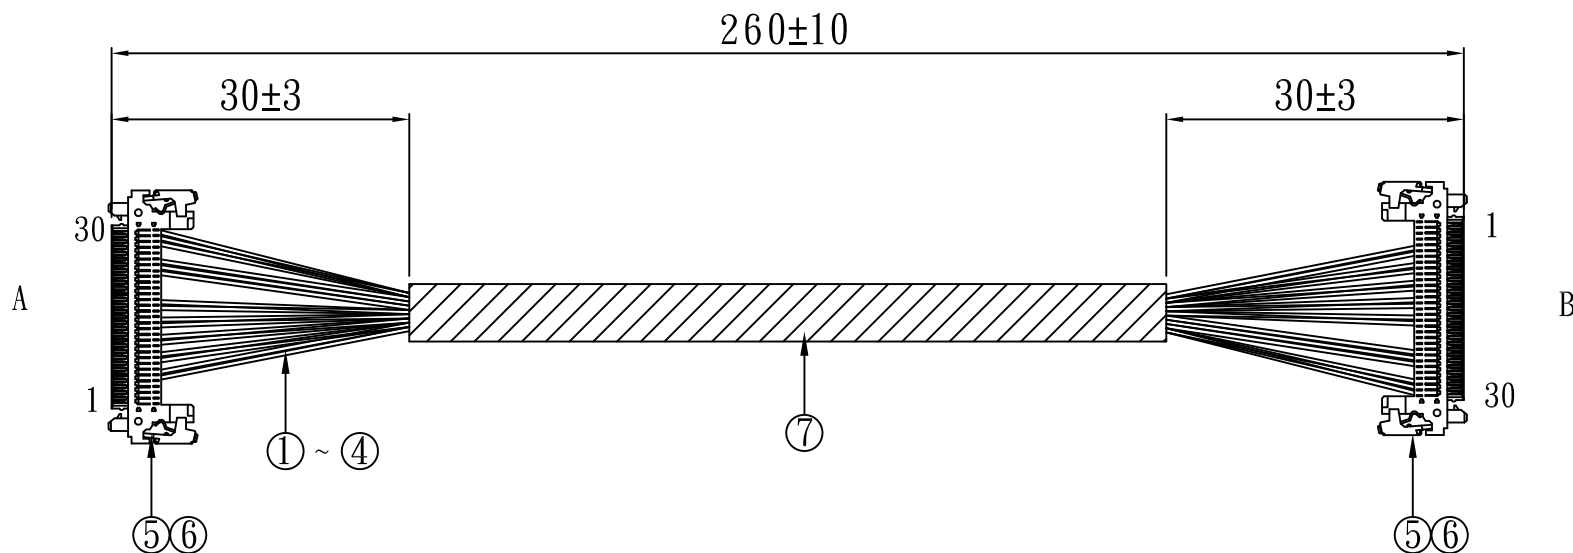

WIRING CHART

A	Color	B
5	Blue	5
6	White	6
8	Blue	8
9	White	9
11	Blue	11
12	White	12
14	Blue	14
15	White	15
17	Blue	17
18	White	18
23	Black	23
24	Black	24
25	Black	25
28	Red	28
29	Red	29
30	Red	30

NOTES:

1. ALL DIMENSIONS ARE "mm".
2. THE PRODUCT MUST BE COMPLY WITH THE DIRECTIVE OF ROHS.

ELECTRICAL TESTING:

1. 100% OPEN/SHORT TEST
2. CONTACT RESISTANCE: 5mΩ
3. INSULATION RESISTANCE: 5MΩ Min

NO.	ITEM.	DESCRIPTION	Q'TY
1	WIRE:	UL1571 #28 OD:0.6 Red	3PCS
2	WIRE:	UL1571 #28 OD:0.6 Black	3PCS
3	WIRE:	UL1571 #28 OD:0.6 Blue	5PCS
4	WIRE:	UL1571 #28 OD:0.6 White	5PCS
5	HOUSING:	FIX-HL-30	2PCS
6	TERMINAL:	FIX-TG-30	32PCS
7	Acetate Cloth Tape :	W:20*L:200	1PCS
8			
9			

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FIXX2-303028LLTB1-M26C-LF

SERIES

LEADFREE

260mm

MALE TO MALE

ACETATE CLOTH TAPE

30 TO 30 WAY

28 AWG

LATCH

DESCRIPTION: