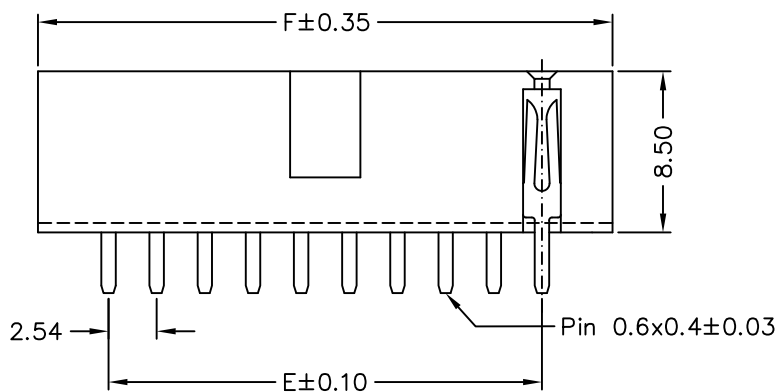
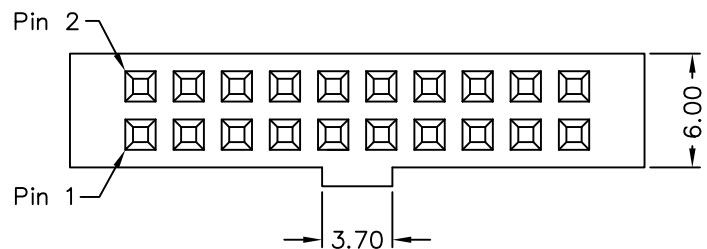


## MATERIAL

Contact Pin : Brass

Insulator : PBT UL94-V0

## SPECIFICATION


Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin.

Contact Resistance : 20mΩMax.

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -25°C to + 85°C



| POLES | DIM E | DIM F |
|-------|-------|-------|
| 5     | 10.16 | 17.60 |
| 6     | 12.70 | 20.14 |
| 7     | 15.24 | 22.68 |
| 8     | 17.78 | 25.22 |
| 9     | 20.32 | 27.76 |
| 10    | 22.86 | 30.30 |
| 12    | 27.94 | 35.38 |
| 13    | 30.48 | 37.92 |
| 15    | 35.56 | 43.00 |
| 17    | 40.64 | 48.08 |
| 20    | 48.26 | 55.70 |
| 25    | 60.96 | 68.40 |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ± 0.30  
.XX ± 0.20  
.XXX ±  
ANG ± 3°

PPOJECTION

照片框

## ORDER INFORMATION

FK-DK-2Xxx-LF  
SERIES LEADFREE  
2X05:10 WAY  
2X25:50 WAY  
KEY  
DIP 180°

DESCRIPTION: FEMALE HEADER 2.54\*2.54mm STRAIGHT TYPE, DUAL ROWS HEIGHT 8.5mm