


Recommended
P.C. Board Layout

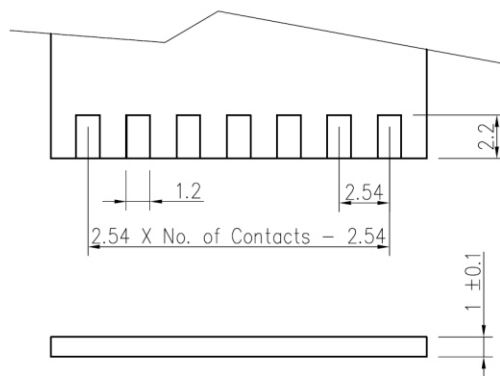

Specifications

Current Rating : 3 Amps

Insulator Resistance : 5000 Megohms min.

Contact Resistance : 20 m ohms max.

Dielectric Withstanding : AC 500V

Operating Temperature : -40°C ~ +105°C

Contact Material : Phosphor Bronze

Insulator Material : Polyester, UL 94V-0

Standard : Nylon-6T

Contact Plated : Full Gold, Full Tin, Selective Plated

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FK-E10-2Xxx-LF
SERIES LEADFREE
2X02:04 WAY
2X40:80 WAY
EDGE CLIP 1.0mm

DESCRIPTION: