

Material:




Housing: Thermoplastic Polyester Glass Filled UL94V-0.
 Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 2 AMP.
 Dielectric Withstanding Voltage : AC 1000V For 1 minute.
 Insulator Resistance: 1000MΩ min. at DC 500V.
 Contact Resistance: 20mΩ max. at DC 100mA.
 Operating Temperature: -55°C ~+105°C .

***RoHS Compliant**

Insertion Depth: 2.55mm to 5.70mm.

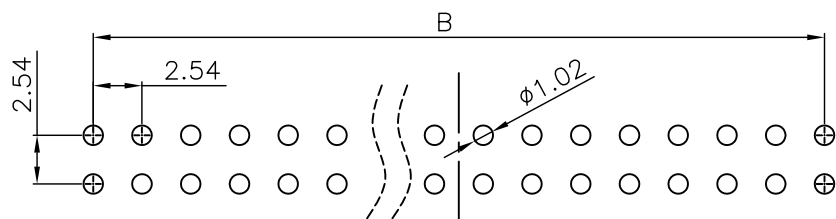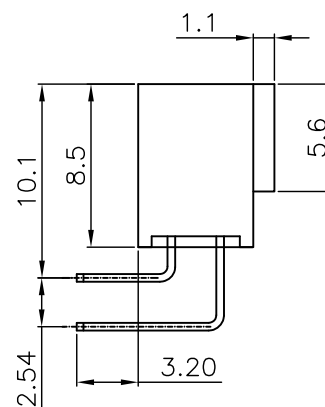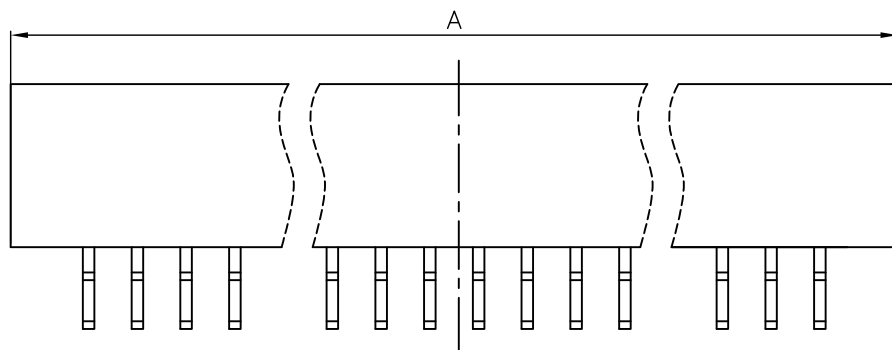

P.C. Board Layout
 (Tolerance:±0.05)

Position	6 Thru 64
Dimension	
A	2.54 X (No. of Position+4)/2
B	2.54 X (No. of Position)/2-2.54

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50
 .X ± 0.25
 .XX ± 0.15
 .XXX ±
 ANG ±

PJECTION

照片框

ORDER INFORMATION

FK-RK-2Xxx-LF
 SERIES LEADFREE
 2X03:06 WAY
 2X32:64 WAY
 KEY
 DIP 90°

DESCRIPTION: