


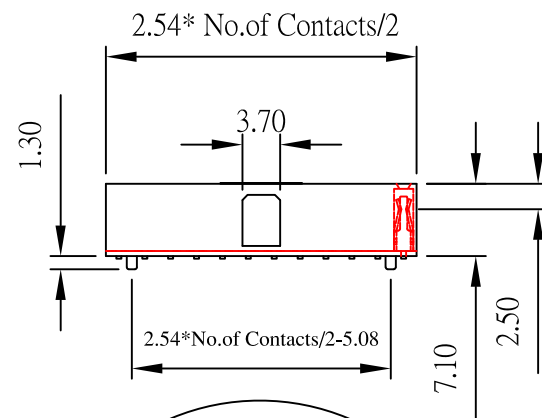


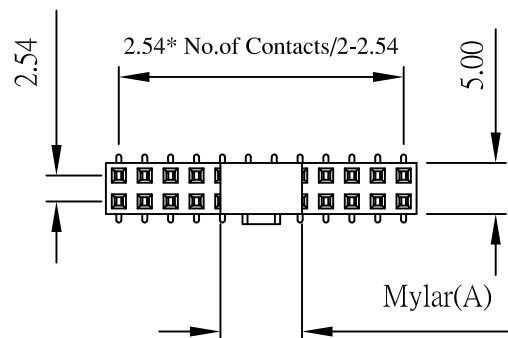

06~20 pin : 0.10 mm MAX.
22~50 pin : 0.20 mm MAX.
52~80 pin : 0.30 mm MAX.

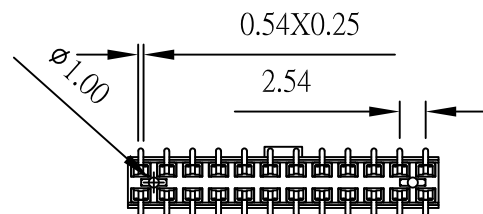


Current Rating and voltage: 3 Amps 250V(r.m.s)
Insulator Resistance: 5000 Megohms min
Contact Resistance: 20 m ohms max
Dielectric Withstanding: 1000 V AC
Operating Temperature: - 40° ~ +105° C
Max Processing Temp: 230° C for 60 seconds
Max Processing Temp: 260° C for 10 seconds
Contact Material: Phosphor Bronze
Insulator Material: High Temperature Plastic,UL 94V-0
Finish: Standard: Gold Flash all over

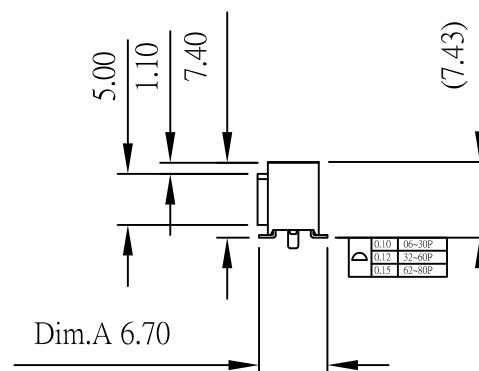

CONTACT	Mylar (A)
2x4~2x40 Pin	5.0*8.0*0.08t
2x2~2x3 Pin	5.0*5.0*0.08t

Recommended P.C. Board
SMD Layout

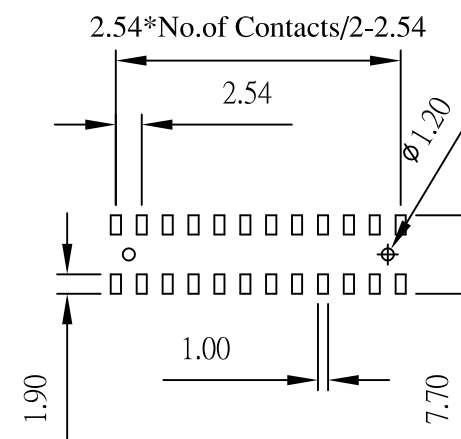

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

FK-V74PC-2Xxx-LF
SERIES LEADFREE
2X02:04WAY
2X40:80WAY
CAP
180°SMT POST
HIGH 7.4mm

DESCRIPTION: