
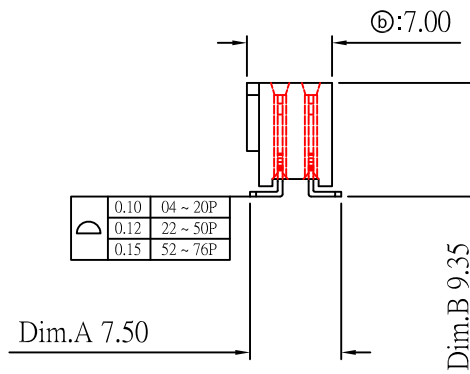
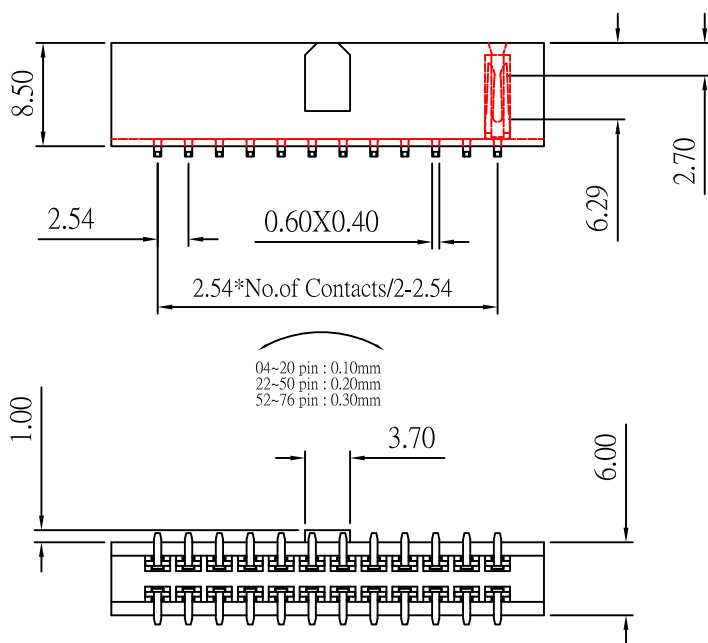


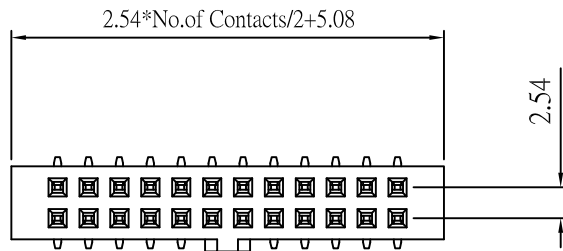


Current Rating Voltage: 3 Amps 250V AC (r.m.s)
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max.
 Dielectric Withstanding: 1000 V AC
 Operating Temperature: - 40° ~ +105° C
 Contact Material:Copper Alloy
 Insulator Material:Polyester,UL 94V-0
 Standard: PBT

Finish: Standard: Gold Flash all over
 Insulator Material: High Temperature
 Polyester,UL 94V-0

Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds

Recommended P.C. Board

SMD Layout

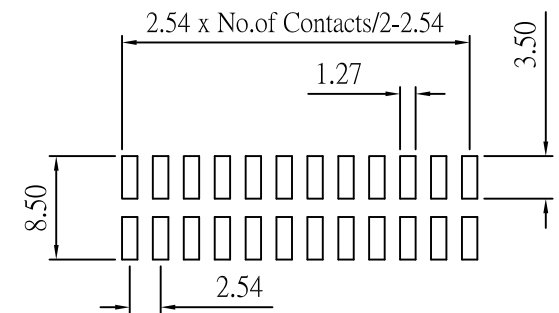

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FK-VK93X-2Xxx-LF
 SERIES LEADFREE
 2X02:04WAY
 2X38:76WAY
 NON POST
 180°SMT HIGH 9.35mm
 KEY

DESCRIPTION: