
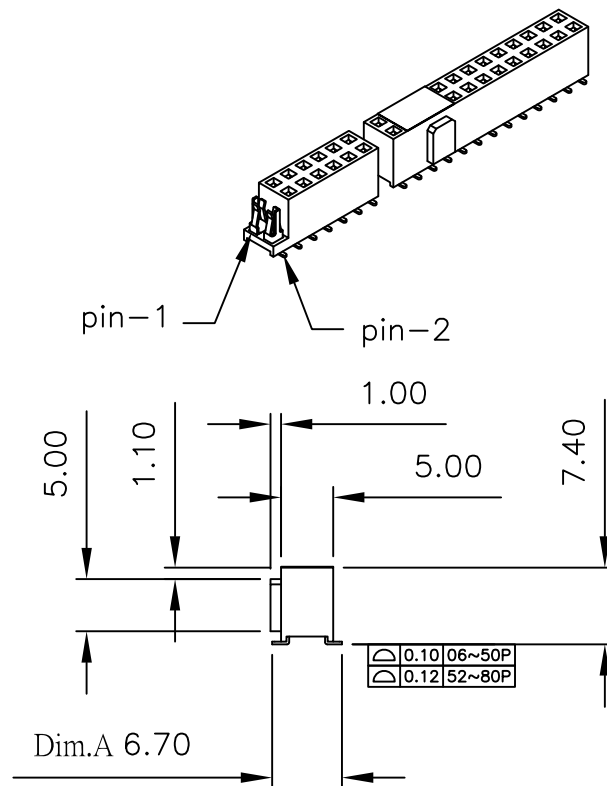


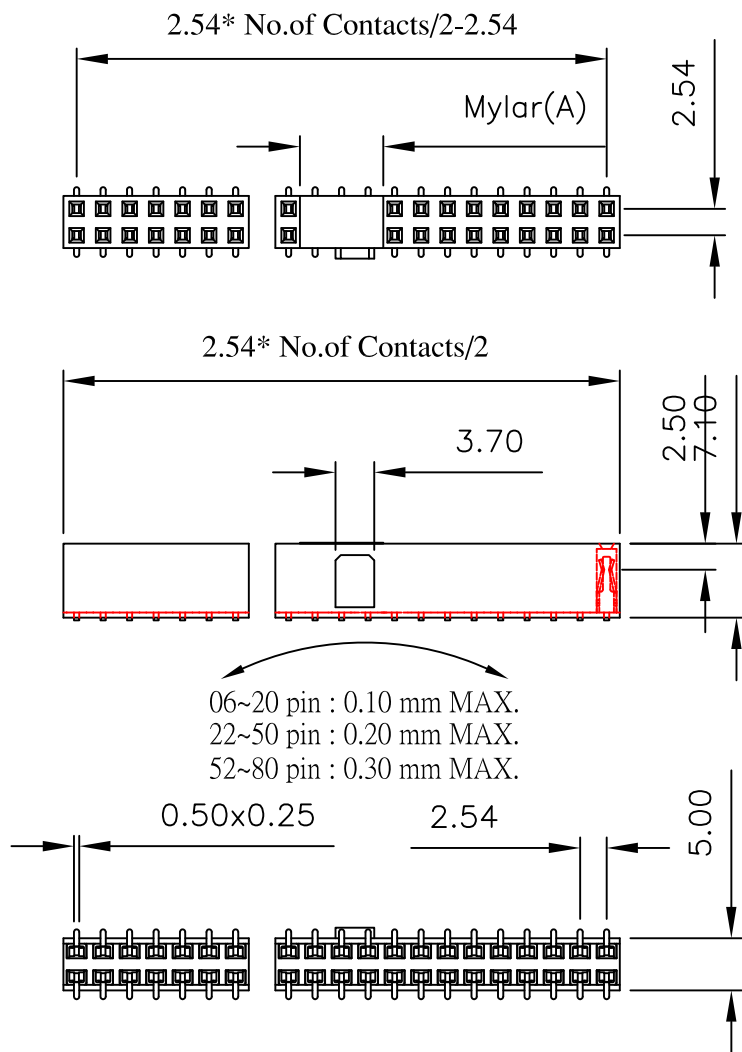


Current Rating: 3 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 1000 V AC
 Operating Temperature: - 40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: High Temperature Plastic,UL 94V-0

Finish: Tin,Gold Plated
 Standard:Gold Flash all over

CONTACT	Mylar (A)
204~240 Pin	5.0*8.0*0.08t
202~203 Pin	5.0*5.0*0.08t

Recommended P.C. Board
 SMD Layout

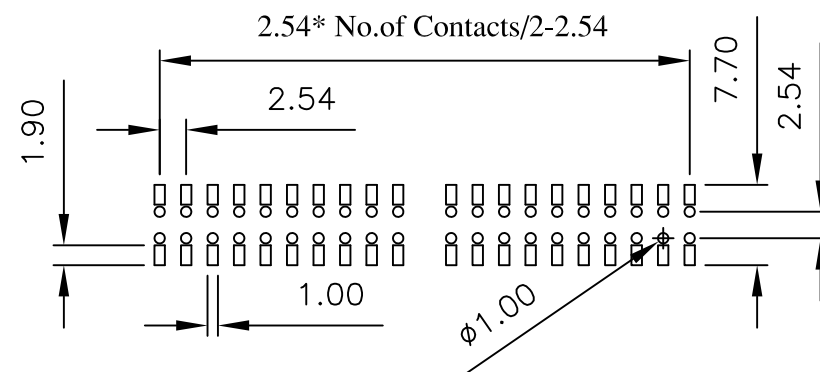

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FK-Z74XC-2Xxx-LF

SERIES LEADFREE
 2X03:06WAY
 2X40:80WAY
 MYLAR
 NON POST
 HIGH 7.4mm

BOTTOM ENTRY SMT

DESCRIPTION: