





NOTES: TYPICAL SPECIFICATIONS

1.0. ELECTRICAL DATA

- 1.1. FREQUENCY RANGE --- DC ... 6 GHz
- 1.2. IMPEDANC --- 50 Ohms
- 1.3. VSWR --- < 1.35
- 1.4. DIELECTRIC WITHSTANDING VOLTAGE --- 750 Vrms
- 1.5. INSULATION RESISTANCE --- 1000 Mega-Ohms
- 1.6. CENTER CONTACT RESISTANCE --- 20.0 mini-Ohms
- 1.7. OUTER CONTACT RESISTANCE --- 10.0 mini-Ohms

2.0. MECHANICAL DATA

- 2.1. COUPLING METHOD --- SNAP-ON
- 2.2. DURABILITY (MATING/UNMATING) --- 100 Cycles
- 2.3. ENGAGEMENT FORCE --- 14 lbs max.
- 2.4. DISENGAGEMENT FORCE --- 14 lbs max.

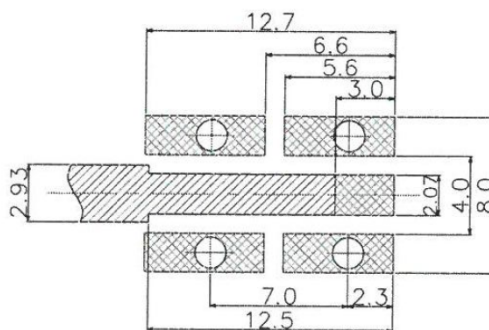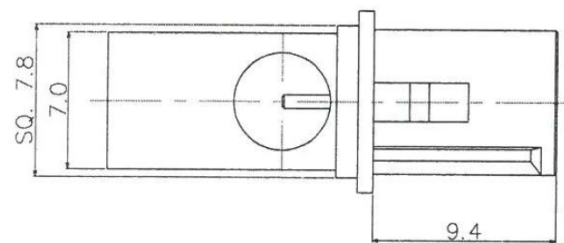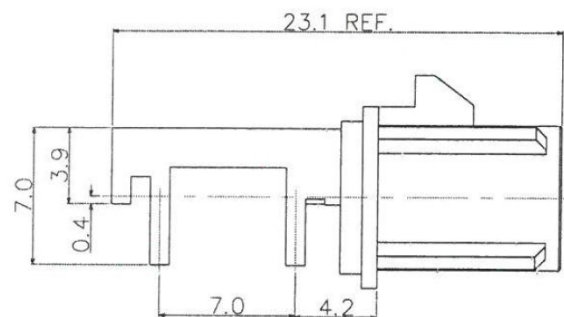

Recommend PCB LAYOUT

CODE

BK		Black 9005
		Radio without phantom supply
WH		Cream white 9001
		Radio phantom supply
BL		Blue 5005
		GPS
PR		Bordeaux 4004
		GSM cellular phone
GR		Green 6002
		TV1 / SDARS
BR		Brown 8011
		TV2 / SDARS
GE		Grey 7031
		Remote control keyless entry

CODE

Violet 4003		PP
		GPS for telematics and navigation
Beige 1001		BG
		Remote control parking heating
Curry 1027		CR
		Radio with IF
Carmines red 3002		RD
		Not defined
Pastel orange 2003		PO
		Not defined
Pastel green 6019		PG
		Not defined
Water blue 5021		WB
		Neutral coding

BOM

4	HOUSING	NYLON	By Code Color	1
3	INSULATOR	TEFLON		1
2	CENTER CONTACT	BRASS	GOLD	1
1	BODY	BARSS	GOLD	1
ITEM	ITEM NAME	MATERIAL	FINISH	Q'TY/EA

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X ± 0.25
X ± 0.15
.XX ± 0.08
.XXX ±
ANG ±

照片框

ORDER INFORMATION

FKSMB-JRFxx-50-LF

SERIES

JACK

DIP 90°

OFFSET

LEADFREE

50 OHM

COLOR

BK:BLACK

WB:WATER BLUE

DESCRIPTION: