





NOTES: TYPICAL SPECIFICATIONS

1.0. ELECTRICAL DATA

- 1.1. FREQUENCY RANGE --- DC ... 6 GHz
- 1.2. IMPEDANCE --- 50 Ohms
- 1.3. VSWR --- < 1.42
- 1.4. DIELECTRIC WITHSTANDING VOLTAGE --- 750 Vrms
- 1.5. INSULATION RESISTANCE --- 1000 Mega-Ohms
- 1.6. CENTER CONTACT RESISTANCE --- 20.0 mini-Ohms
- 1.7. OUTER CONTACT RESISTANCE --- 10.0 mini-Ohms

2.0. MECHANICAL DATA

- 2.1. COUPLING METHOD --- SNAP-ON
- 2.2. DURABILITY (MATING/UNMATING) --- 100 Cycles
- 2.3. ENGAGEMENT FORCE --- 14 lbs max.
- 2.4. DISENGAGEMENT FORCE --- 14 lbs max.

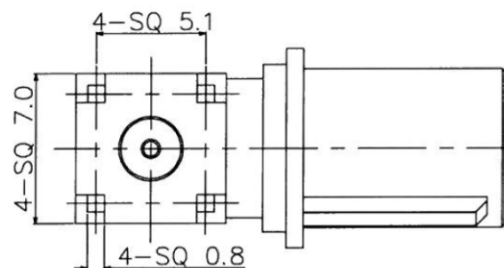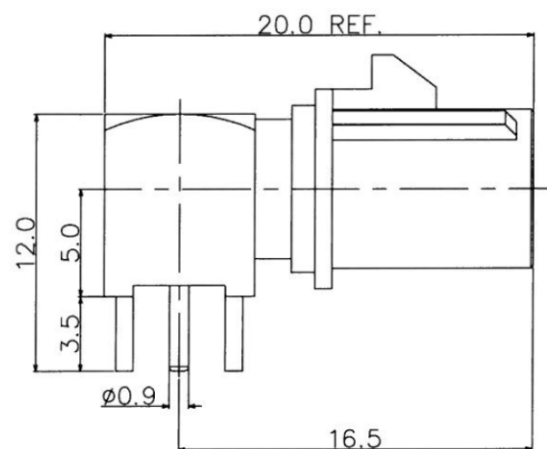

CODE REFERENCE CHART

BK	Black 9005
WH	Cream white 9001
BL	Blue 5005
PR	Bordeaux 4004
GR	Green 6002
BR	Brown 8011
GE	Grey 7031

Violet 4003	PP
Beige 1001	BG
Curry 1027	CR
Carmin red 3002	RD
Pastel orange 2003	PO
Pastel green 6019	PG
Water blue 5021	WB

5	HOUSING	PA66	By Code Color	1
4	REAR BODY	BRASS	NICKEL	1
3	INSULATOR	TEFLON		2
2	CENTER CONTACT	BRASS	GOLD	1
1	JACK BODY	BARSS	NICKEL	1
ITEM	ITEM NAME	MATERIAL	FINISH	Q'TY/EA

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X ± 0.25
X ± 0.15
.XX ± 0.08
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FKSMB-JRxx-50-LF

SERIES | LEADFREE
50 OHM
COLOR
BK:BLACK
WB:WATER BLUE

DESCRIPTION: