

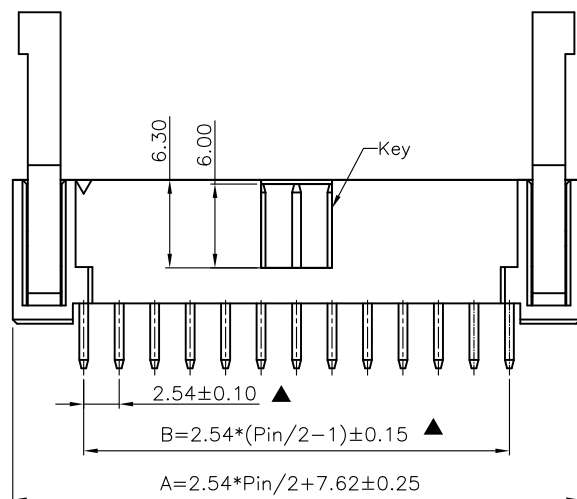


P/N: FL-DS-xx



Dimension :

Pos	Dim A	Dim B	Pos	Dim A	Dim B	Pos	Dim A	Dim B
6	15.24	5.08	16	27.94	17.78	34	50.80	40.64
8	17.78	7.62	20	33.02	22.86	40	58.42	48.26
10	20.32	10.16	24	38.10	27.94	50	71.12	60.96
12	22.86	12.70	26	40.64	30.48	60	83.82	73.66
14	25.40	15.24	30	45.72	35.56	64	88.90	78.74

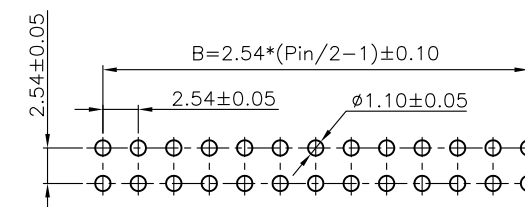

Recommended PCB Layout

TOLERANCES ARE

煜倫股份有限公司

www.morethanall.com

SIZE A4

X, ±	
.X ±	0.20
.XX ±	0.15
.XXX ±	
ANG ±	




PPOJECTION 

照片框


ORDER INFORMATION

FL-Dx-xx-LF
SERIES LEADFREE
06~64WAY
BLANK:LONG LATCH
S:SHORT LATCH
DIP 180°


DESCRIPTION:	2.54mm Box Header Straight Type
--------------	---------------------------------




COVER TRAY





BOTTOM TRAY




TRAY




23TRAYS



CARTON

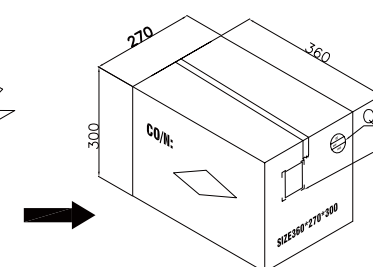

QC PASS LABEL
EXPORT LABEL

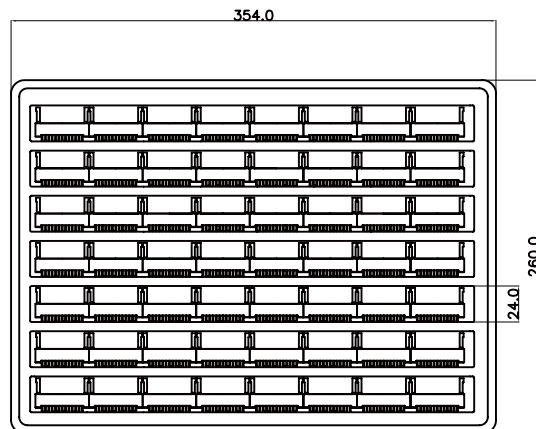

TRAY LAYOUT



NOTE:

1.DIMENSION

TRAY SIZE:354(L)x260(W)x11.8(H) (MM)

CARTON SIZE:360(L)x270(W)x300(H) (MM)

2.QUANTITY

CIRCUITS	PCS/TARY	TARYS/CARTON	Q'TY
06	140	23	3220
08	119	23	2737
10	105	23	2415
12	91	23	2093
14	84	23	1932
16	77	23	1771
20	63	23	1449
24	56	23	1288
26	49	23	1127
30	42	23	966
34	42	23	966
40	35	23	805
50	28	23	644
60	21	23	483
64	21	23	483

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

FL-Dx-xx-LF
SERIES | LEADFREE
06~64WAY
BLANK:LONG LATCH
S:SHORT LATCH
DIP 180°

DESCRIPTION: 2.54mm Box Header Straight Type Packing List