
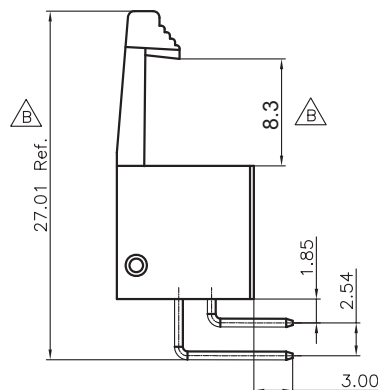


P/N:2316R-XXG-01

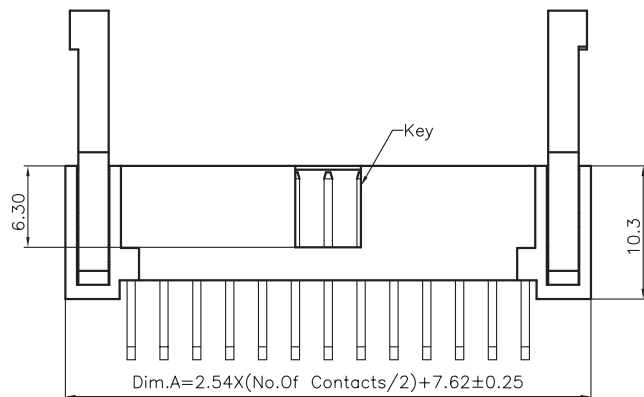

P/N:2316R-XXG-02

Specifications:

Current rating:3.0 Amps

Voltage rating:250 AC,DC

Contact resistance:20mohm max.

Insulation resistance:1,000Mohm min.

Dielectric Withstanding:600V AC/Minute

Operating Temperature:-40°C ~ +105°C


Materials:

Insulator:High Tempe. Plastic (PBT UL94V-0)

Standard Color:Black


Contact:Brass

Plating:Gold Plated



Dimension :

Pos	Dim A	Dim B	Pos	Dim A	Dim B	Pos	Dim A	Dim B
6	15.24	5.08	16	27.94	17.78	34	50.80	40.64
8	17.78	7.62	20	33.02	22.86	40	58.42	48.26
10	20.32	10.16	24	38.10	27.94	50	71.12	60.96
12	22.86	12.70	26	40.64	30.48	60	83.82	73.66
14	25.40	15.24	30	45.72	35.56	64	88.90	78.74

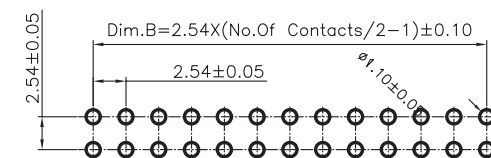

Recommended PCB Layout

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X ± 0.20

.XX ± 0.15


.XXX ±

ANG ±

PJECTION

照片框

ORDER INFORMATION

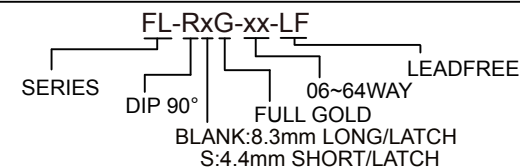

DESCRIPTION: 2.54mm Box Header Right Angle Type