





RECOMMENDED
MOUNTING HOLE



(0.81~1.48 CABLE)
RECOMMENDED
CABLE STRIPPING DIM



(RG178 CABLE)
RECOMMENDED
CABLE STRIPPING DIM

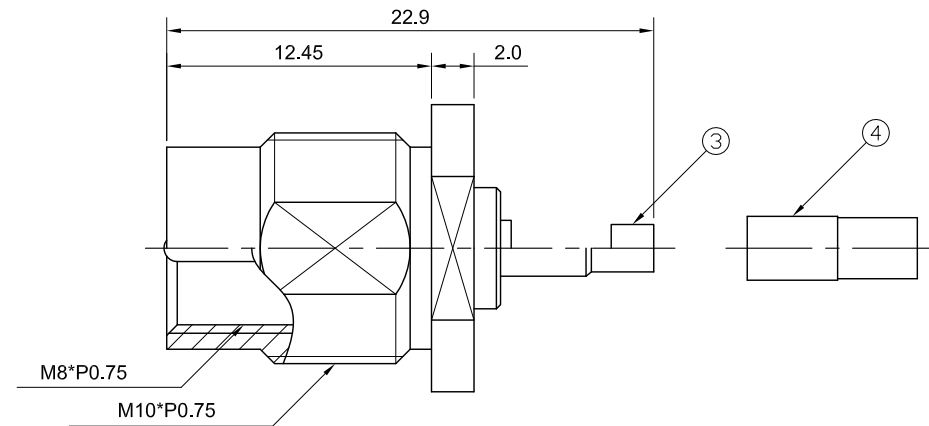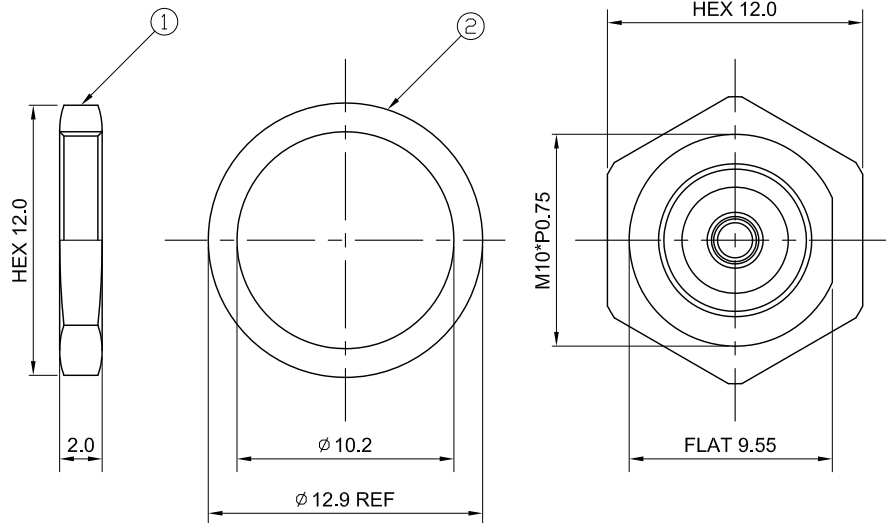

04	FERRULE	BRASS	NICKEL	1
	INSULATOR	TEFLON	NONE	1
03	PIN	BRASS	GOLD	1
	BODY	BRASS	NICKEL	1
02	WASHER	BRASS	NICKEL	1
01	NUT	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

FME-PCPBNW-xxx-LF
SERIES
MALE
CRIMP
NUT
WASHER
PANEL BACK
LEADFREE
0.81mm~RG178

DESCRIPTION: FME Straight bulkhead Plug Solder for 0.81~RG178 Cable