
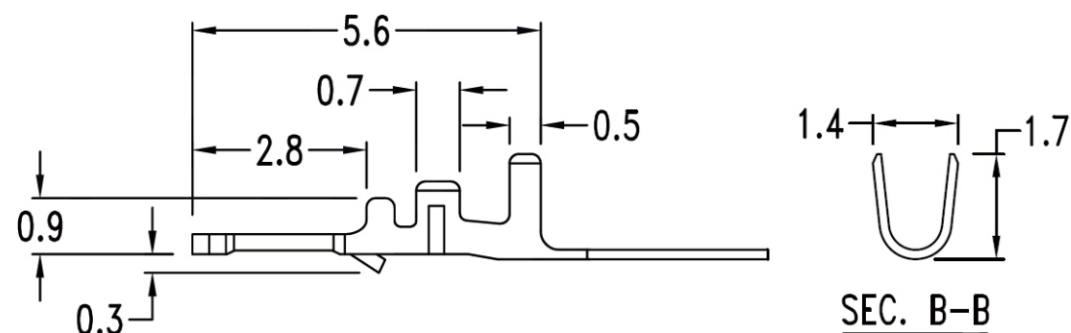


Features:

- Material: Phosphor bronze
- Finished: Tin-plated
- Wire range: AWG #28 ~ #32
- Thickness: 0.15mm

Specification:

- Current rating: 1A (0.8A for #32 AWG)
- Voltage rating: 125V
- Contact resistance on crimped partion: $5m\Omega$ Max.
- Withstanding voltage: 250V AC/minute
- Temperature rise: $-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$
(including temperature rise)

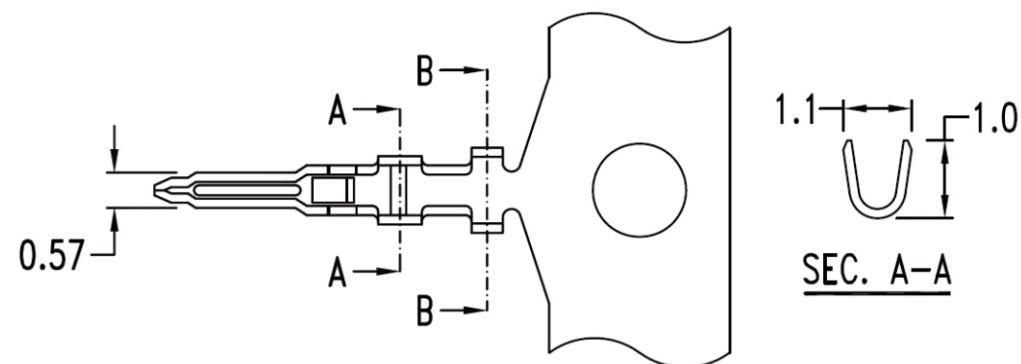

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ± 0.30
.X, ± 0.25
.XX, ± 0.15
.XXX, ± 0.05
ANG $\pm$

ORDER INFORMATION

FN-T-28-LF
SERIES | LEADFREE
28~32 AWG
TERMINAL

DESCRIPTION: