


N= No Of Conductor

Note:

*Rohs: Yes

*儲存環境:

16c~27c / 溼度 65RH%

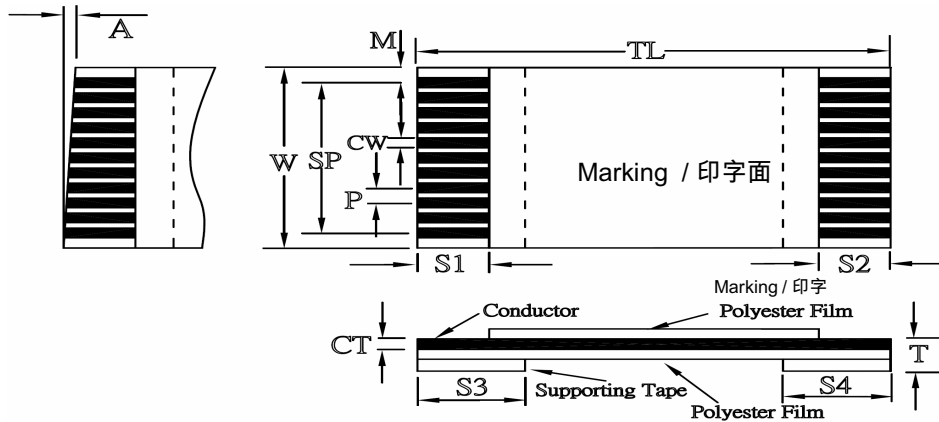

Dimension 尺寸

Item / 項目		Symbol 代號	Range 尺寸	Tolerance 公差
1	No of Conductors / 導體數目	N	40	/
2	Pitch / 導體間距	P	1.0	±0.1
3	Total Length / 總長度	TL	760	±8.0
4	Margin Width / 邊寬	M	1.0	±0.1
5	Terminal Thicknes / 線端總厚度	T	0.30	±0.05
6	Contact Length / 接觸面長度	S1	4	±0.8
		S2	4	±0.8
7	Supporting Length / 補強板長度	S3	6	±1.5
		S4	6	±1.5
8	Total Width / 總寬度	W	41.00	±0.15
9	Toal Pitch / 內部總間距	SP	39.00	±0.10
10	Slope / 切口斜度	A	0.0	<0.05

Material / 材料

Item / 項目		Specification / 規格		Remark / 備註
1	Insulation / 膠膜	UL20798 White	0.043	PET
2		White	0.043	PET
3	Suppoort Tape / 補強板	Blue	0.225	PET
4	Conductor / Plating 導體 / 鍍層	Thickness (Ct)	0.035	±0.005
		Width (Cw)	0.65	±0.03
		Plated	1~3um	Sn
		/	/	/
		/	/	/
		/	/	/
		/	/	/
		/	/	/
		/	/	/

Charateristics / 特性表

UL STYLE 20798

Test Item / 測試項目		Testing Method / 測試方法	Specification / 規格
1	Conductor Resistance / 導體阻抗	JIS-C-3102(at20°C)	0.93 Ω/M MAX.
2	Insulation resistance / 絕緣阻抗	Apply the voltage of DC 500V for min	More than 1000MΩ 大於 1000MΩ
3	Dielectric Srtength / 耐壓強度	AC 500V, 0.5Ma, 1分鐘, 在空氣中相鄰兩導體	PASS
4	Continuity Test / 導通測試	Apply Test DC 3V	No open/Short Citcuit
5	Rated Current / 額定電流	/	1.0A
6	Rated Voltage & Temperature / 額定電壓及溫度	UL Sub, 758	60V 80°C
7	Operating Temperature / 操作溫度	Fixed Wiring Condition	-40°C~85°C
8	Flammability Test / 耐燃性測試	UL Sub, 758 V W-1	PASS
9	Heat Resistance / 抗熱測試	85°C / 96 hrs	No Trouble with insulation Resistance and withstand voltage 絕緣電阻與耐電壓符合要求
10	Humidity Resistance / 抗溼測試	40°C , 95%RH, 96 hrs	
11	Temperature Cycling Test / 溫度循環測試	40°C(4H)~25°C(2H)~85°C(4H)~25°C(2H) 5Cycles	
12	Sliding Test / 柔性測試	180°折彎測試 R=10mm/垂吊c500g/速度c60 次/分 / 搖擺角度c180°	耐曲折測試≥30cycle
13		15mmR,70 cycle / min , 25mm 往復運動	耐曲折測試≥100,000cycle
14	Abrasion Test / 耐磨測試	Ø5mm,600g,60cycle/min	Min 10,000cycles 10,000回以上

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.30
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 1°

照片框

ORDER INFORMATION

FPA-CA40-760-LF
SERIES | | LEADFREE
760mm
40WAY
SAME SIDE
CABLE

DESCRIPTION: 1.0PH 40PIN L=760mm 4466 C TYPE UL20798