
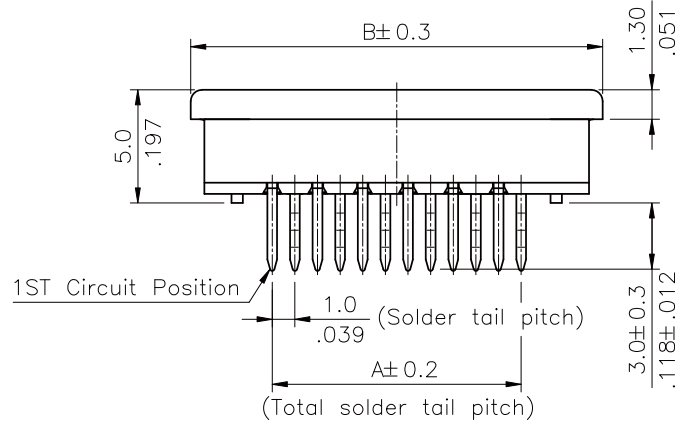


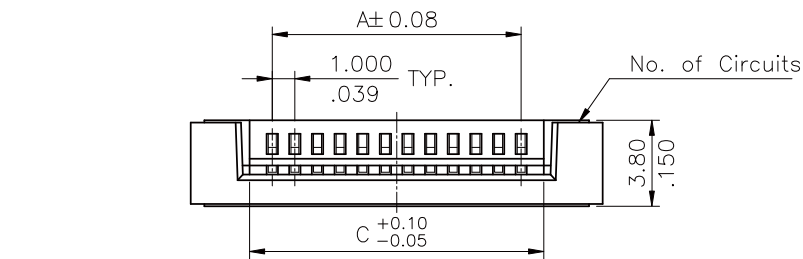


$$A = 1.00 * \text{No. of Spaces}$$



$$B = A + 7.2$$

$$C = A + 2.1$$

* Available in 4 through 32 circuits

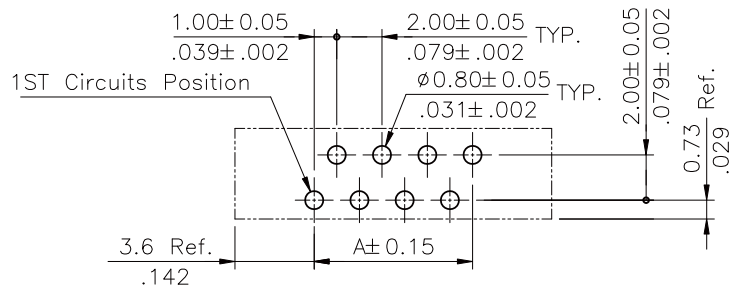


Recommended P.C. Board Layout

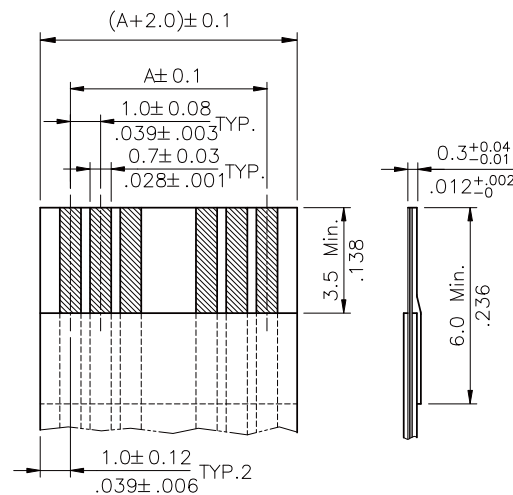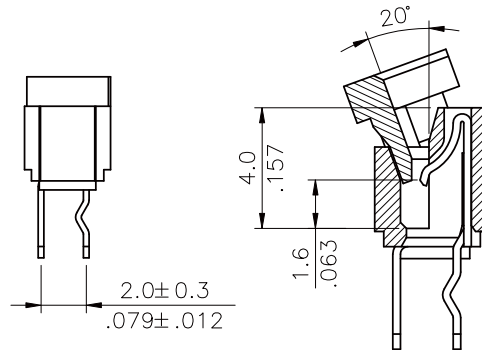

* ACCOMMODATED FFC

Material:

- * Insulation: Nylon 6T With 30% GF.
UL 94V-0, Color Nature
- * Slider: Nylon 6T With 30% GF.
UL 94V-0, Color Black
- * Contact: Phosphor Bronze

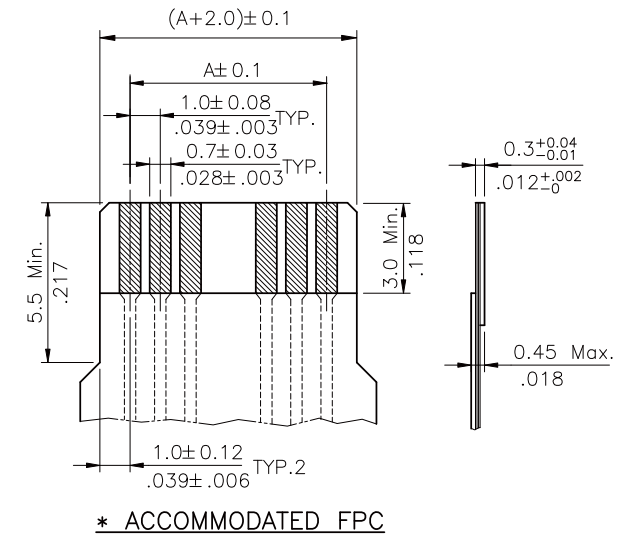

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.15
.XX ± 0.10
.XXX ± 0.05
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPA-DZAL50-xx-LF

SERIES L LEADFREE

DIP 180° 04-32WAY

ZIF HIGH 5.0mm

L TYPE FOOT POSITION
SINGLE CONTACT

DESCRIPTION: 1.00mm(.039") ST. DIP TY ZIF FFC/FPC CONNECTOR