

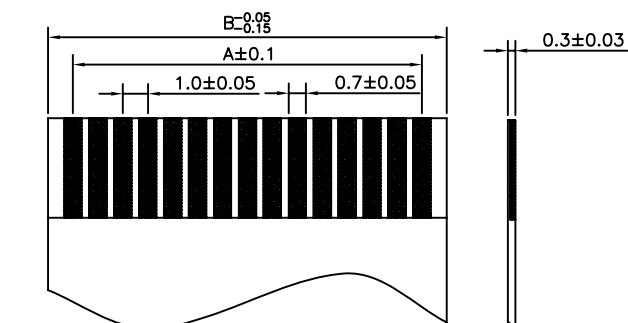
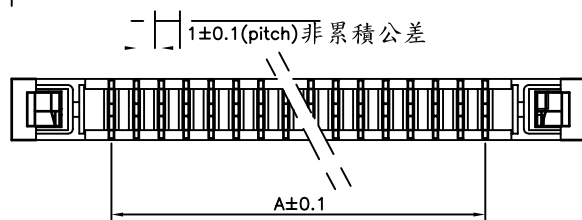
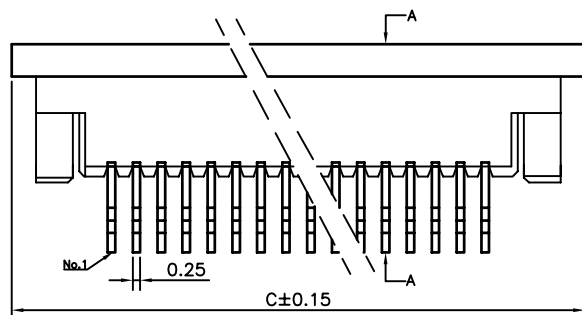
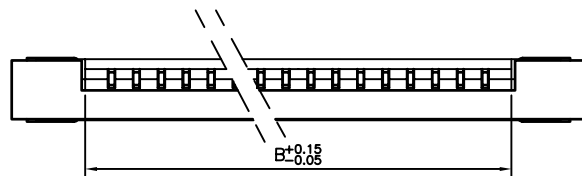
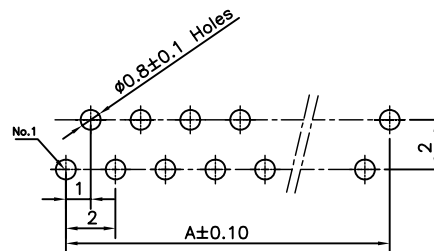




適用FPC寸法
APPLICABLE FPC

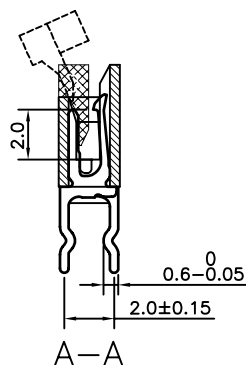

適用線路板
PCB LAYOUT

Specifications

Voltage Rating: 50V AC/DC
Contact Resistance: 30 mΩ Max
Insulation Resistance: 500MΩ Min.
Dielectric Withstanding Voltage: 500V, AC/Minute
Temperature Range: -25°C ~ +85°C

Materials

Contact: Phosphor Bronze
Insulation: High Temperature Thermoplastic
UL 94V-0 Nylon46 or the equivalent material
Actuafor: PPS(UL94V-0)

No. of Contact	Dimension Information		
	A	B	C
04	3.00	5.10	11.00
05	4.00	6.10	12.00
06	5.00	7.10	13.00
07	6.00	8.10	14.00
08	7.00	9.10	15.00
09	8.00	10.10	16.00
10	9.00	11.10	17.00
11	10.00	12.10	18.00
12	11.00	13.10	19.00
13	12.00	14.10	20.00
14	13.00	15.10	21.00
15	14.00	16.10	22.00
16	15.00	17.10	23.00
17	16.00	18.10	24.00
18	17.00	19.10	25.00
19	18.00	20.10	26.00
20	19.00	21.10	27.00
21	20.00	22.10	28.00
22	21.00	23.10	29.00
23	22.00	24.10	30.00
24	23.00	25.10	31.00
25	24.00	26.10	32.00
26	25.00	27.10	33.00
27	26.00	28.10	34.00
28	27.00	29.10	35.00
29	28.00	30.10	36.00
30	29.00	31.10	37.00
31	30.00	32.10	38.00
32	31.00	33.10	39.00
33	32.00	34.10	40.00
34	33.00	35.10	41.00
35	34.00	36.10	42.00
36	35.00	37.10	43.00
37	36.00	38.10	44.00
38	37.00	39.10	45.00
39	38.00	40.10	46.00
40	39.00	41.10	47.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.38
.X ± 0.30
.XX ± 0.25
.XXX ± 0.20
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPA-DZAL53-xx-LF

SERIES

LEADFREE

04~40WAY

HIGH 5.3mm

DIP 180°

L TYPE FOOT POSITION

SINGLE CONTACT

ZIF

DESCRIPTION: 1.0mm Pitch FPC