


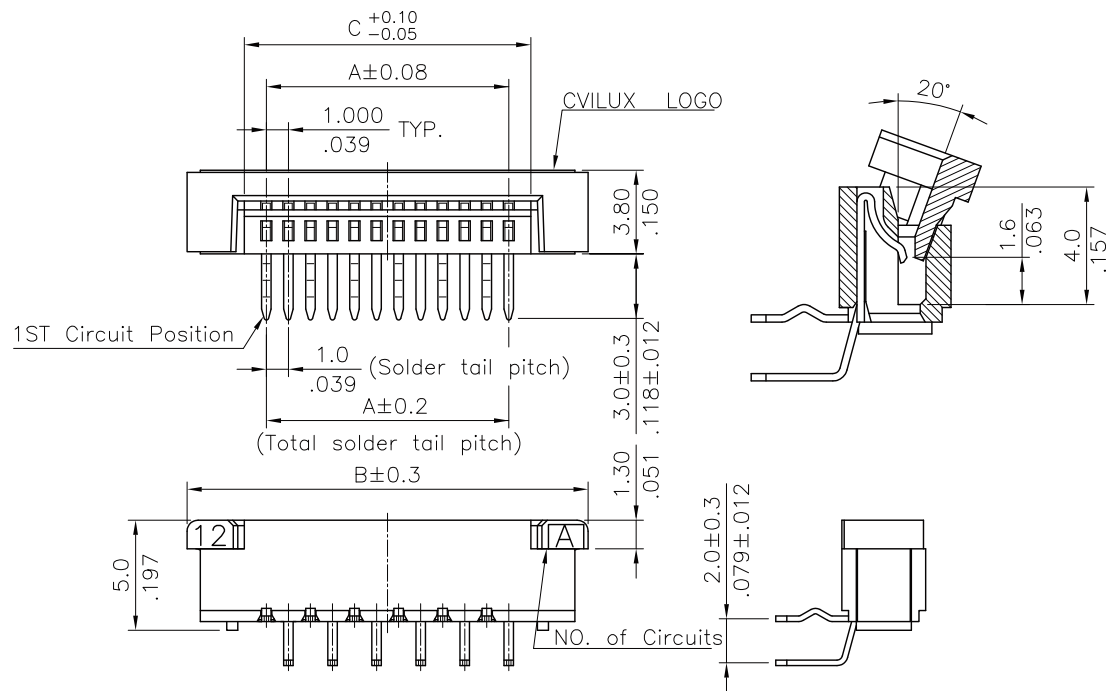


$$A = 1.00 * \text{No. of Spaces}$$


$$B = A + 7.2$$

$$C = A + 2.1$$

\* Available in 4 through 32 circuits

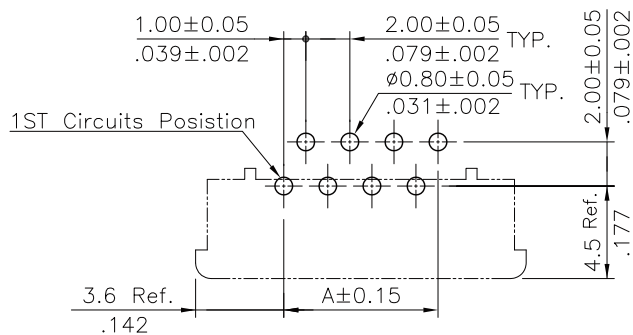


Recommended P.C. Board Layout

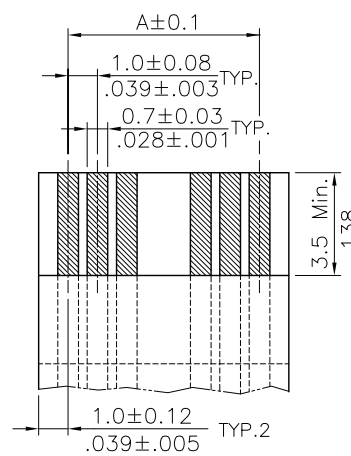

\* ACCOMMODATED FFC

Material:

- \* Insulation: High temperature plastic UL 94V-0  
Color Nature
- \* Slider: High temperature plastic UL 94V-0, Color Black
- \* Contact: Phosphor Bronze

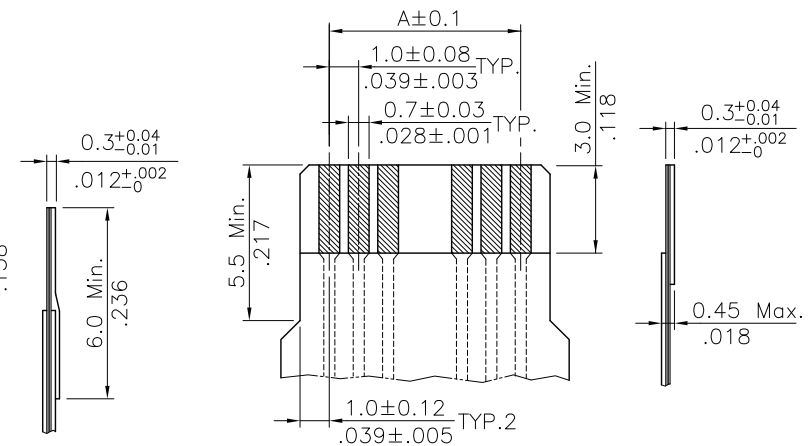

\* ACCOMMODATED FPC

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

FPA-RZBL50-xx-LF  
SERIES | | | | | LEADFREE  
DIP 90° | | | | | LONG 5.0mm  
ZIF | | | | | L TYPE FOOT  
BOTTOM CONTACT

DESCRIPTION:

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±