

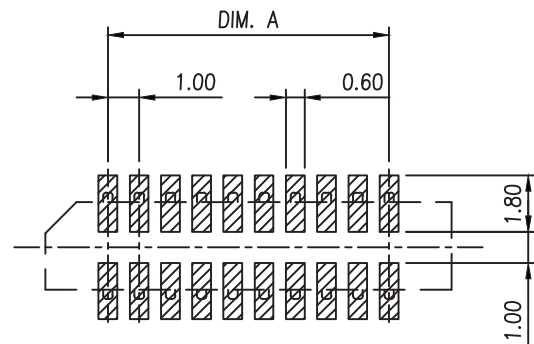
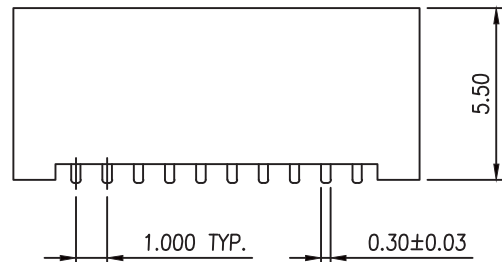
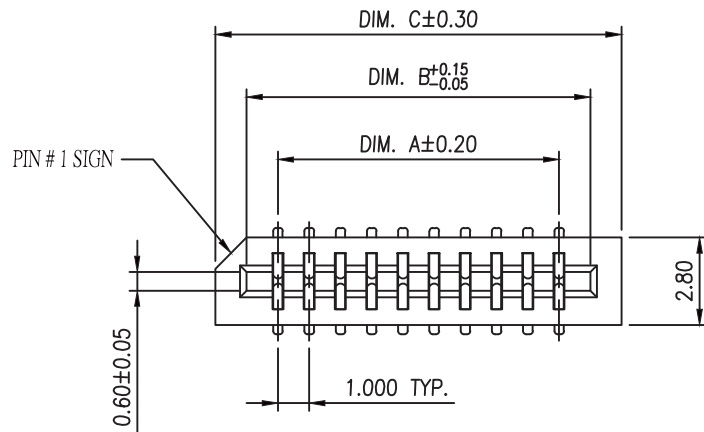
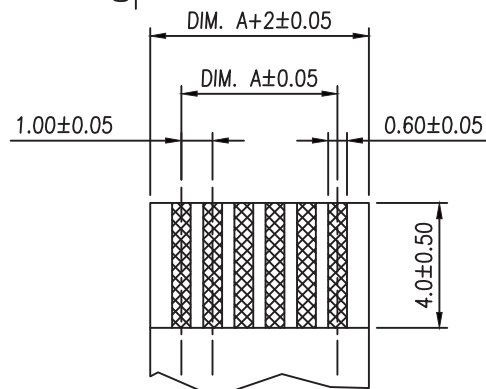


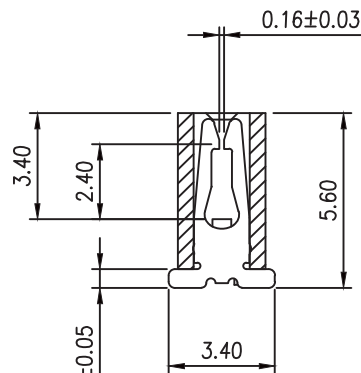

RECOMMENDED PCB LAYOUT
TOLERANCE: ± 0.05

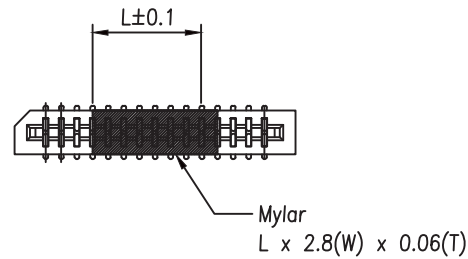

FPC/FFC T = 0.30 ± 0.05

NOTE:

1.MATERIAL:
HOUSING: HIGH TEMPERATURE THERMOPLASTIC.
CONTACT: COPPER ALLOY.

2.FINISH:

TERMINAL:

CONTACT AREA: TIN PLATING 100 μ " THICKNESS MIN.
SOLDERING AREA: TIN PLATING 100 μ " THICKNESS MIN.;
UNDER PLATING: NICKEL PLATING 50 μ " THICKNESS MIN. OVERALL.

DIMENSION TABLE

Pos.	Dimension				Pos.	Dimension			
	A	B	C	L		A	B	C	L
3	2.00	4.10	6.00	4	17	16.00	18.10	20.00	12
4	3.00	5.10	7.00		18	17.00	19.10	21.00	
5	4.00	6.10	8.00		19	18.00	20.10	22.00	
6	5.00	7.10	9.00		20	19.00	21.10	23.00	
7	6.00	8.10	10.00	8	21	20.00	22.10	24.00	
8	7.00	9.10	11.00		22	21.00	23.10	25.00	
9	8.00	10.10	12.00		23	22.00	24.10	26.00	
10	9.00	11.10	13.00		24	23.00	25.10	27.00	
11	10.00	12.10	14.00	12	25	24.00	26.10	28.00	
12	11.00	13.10	15.00		26	25.00	27.10	29.00	
13	12.00	14.10	16.00		27	26.00	28.10	30.00	
14	13.00	15.10	17.00		28	27.00	29.10	31.00	
15	14.00	16.10	18.00	12	29	28.00	30.10	32.00	
16	15.00	17.10	19.00		30	29.00	31.10	33.00	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ±

PPOJECTION

照片框


ORDER INFORMATION

FPA-VL2256CR-xx-LF
SERIES | | | | | LEADFREE
| | | | | 02~36WAY
| | | | | MYLAR+REEL
180°SMT | | | | | HIGH 5.6mm
NON ZIF | | | | | DUAL PIN LAYOUT
| | | | | DUAL CONTACT


DESCRIPTION: FPC/FFC 1.00mm PITCH NON ZIF DUAL CONTACT SMT TYPE

NOTE

1. REEL MATERIAL : PS
2. CARRIER MATERIAL : PS
3. COVER TAPE MATERIAL : PS
4. COVER TAPE REEL STRENGTH : 13"
5. QUANTITY : 900 PCS/REEL

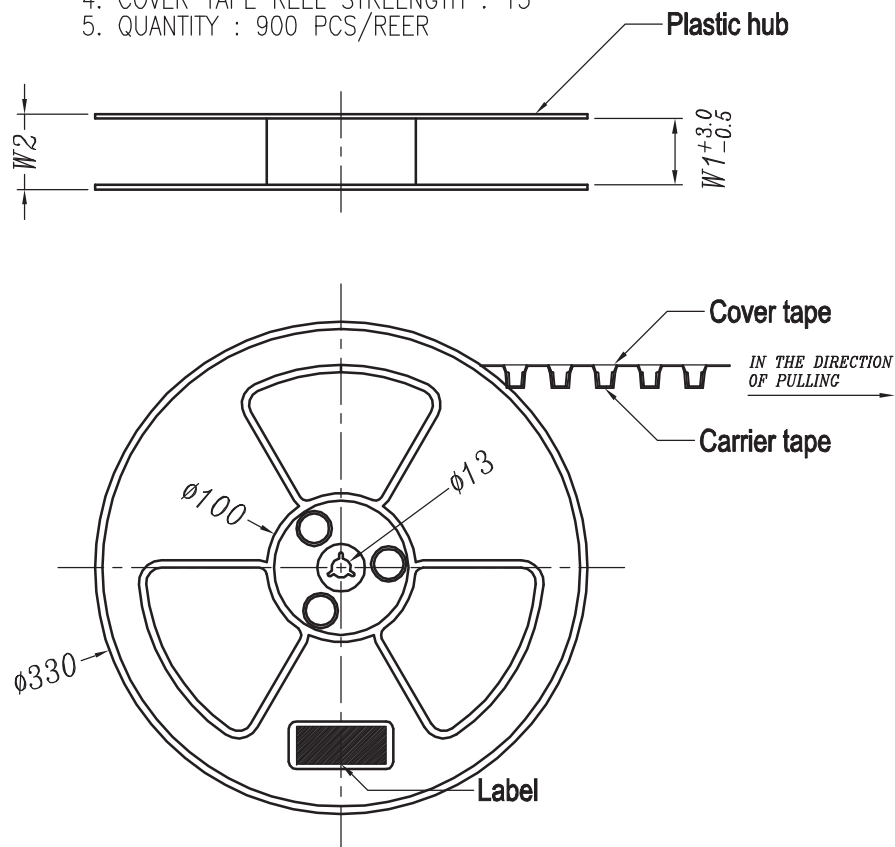

Carton: 380(L) X 380(W) X 350(H)

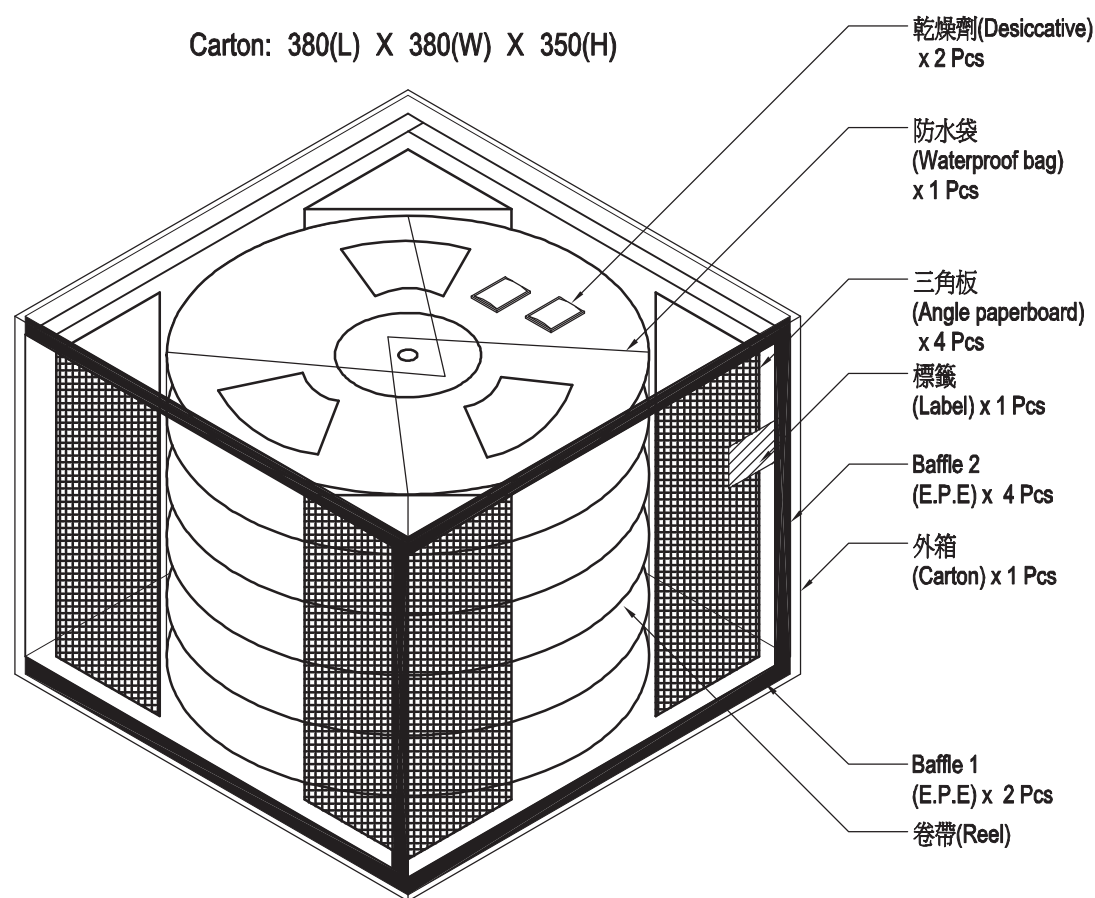

NO. OF CONTACTS	DIMENSION				PACKING	
	F	W1	W2	W3	REEL/CARTON	QUANTITY(PCS)
2~12	11.5	24.5	30.5	24.0	10	9000
13~16	28.4	32.5	38.5	32.0	8	7200
17~28	40.4	44.5	50.5	44.0	6	5400
29~30	52.6	56.5	62.5	56.0	5	4500



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION



X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

FPA-VL2256CR-xx-LF
SERIES | | | | | LEADFREE
180°SMT | | | | | 02~36WAY
NON ZIF | | | | | MYLAR+REEL
DUAL PIN LAYOUT
DUAL CONTACT

DESCRIPTION: FPC 1.0mm PITCH NON ZIF TOP ENTRY TYPE REEL PACKAGING

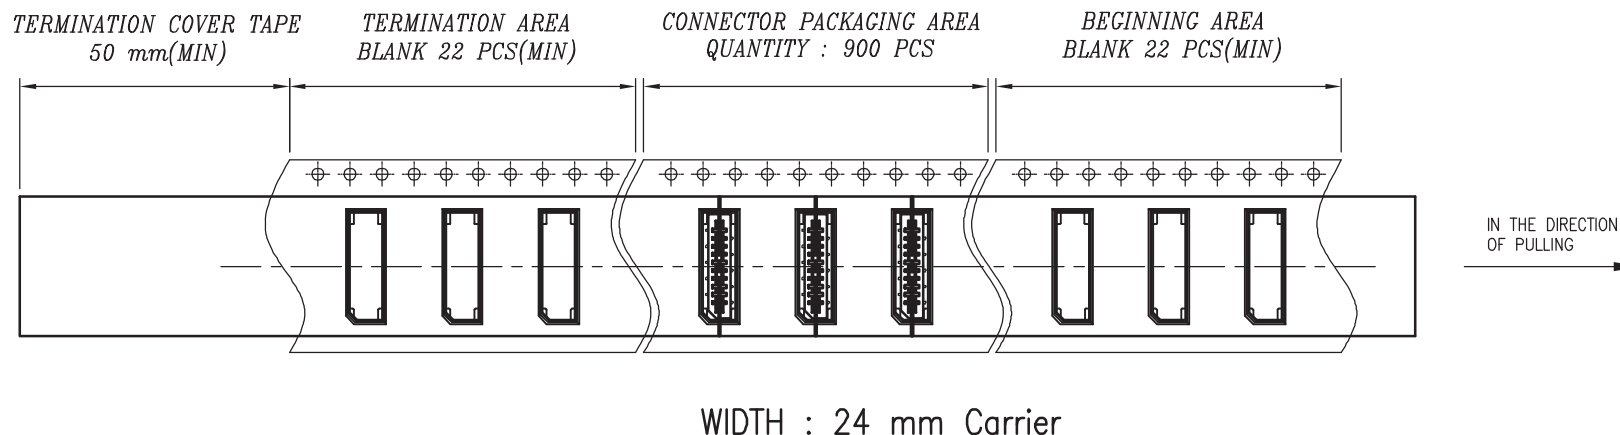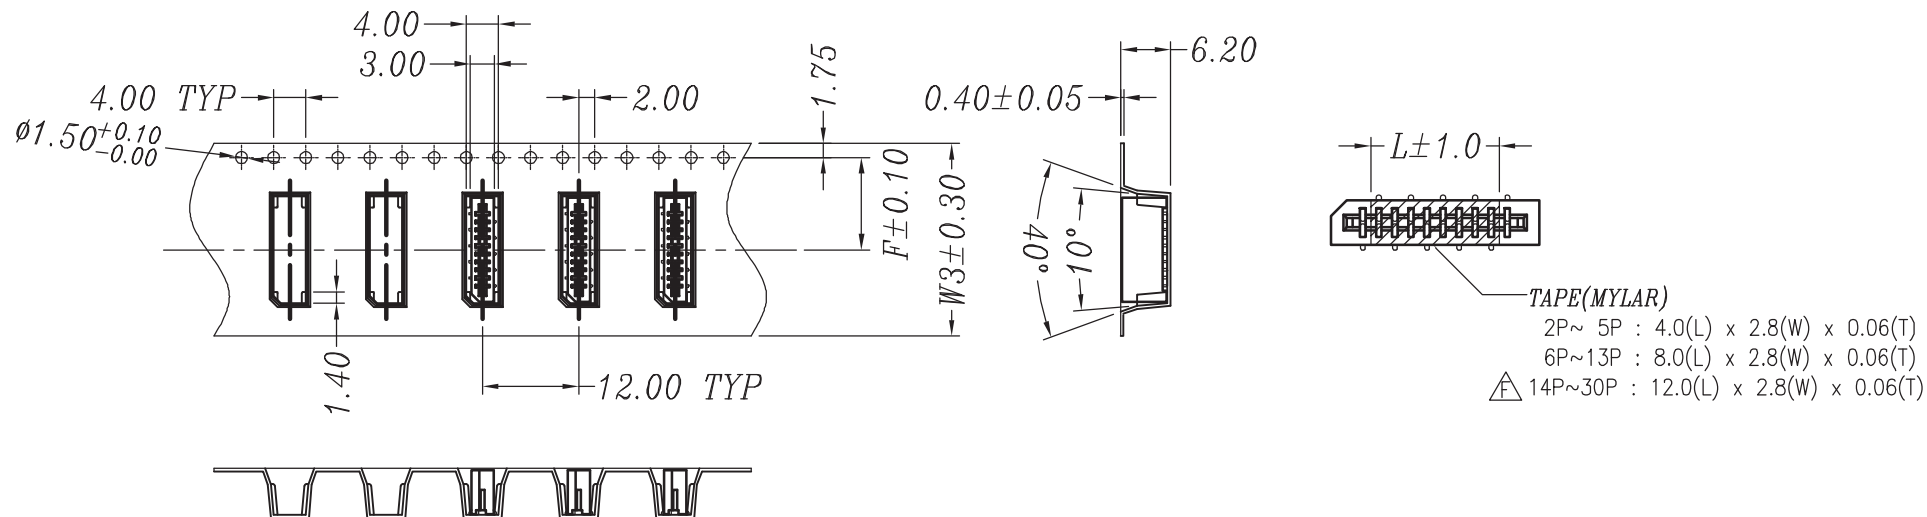

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$

.X $\pm$ 0.30

.XX $\pm$ 0.20

.XXX $\pm$

ANG $\pm$




PPOJECTION

照片框

ORDER INFORMATION

FPA-VL2256CR-xx-LF
SERIES
180°SMT
NON ZIF
LEADFREE
02~36WAY
MYLAR+REEL
HIGH 5.6mm
DUAL PIN LAYOUT
DUAL CONTACT

DESCRIPTION: FPC 1.0mm PITCH NON ZIF TOP ENTRY TYPE REEL PACKAGING

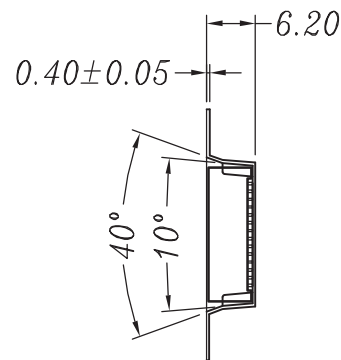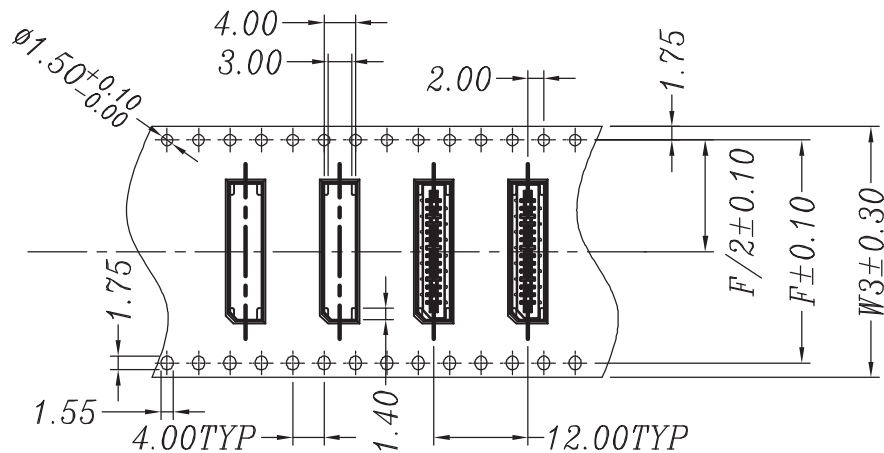


TAPE (MYLAR)

2P~5P : 4.0(L) x 2.8(W) x 0.06(T)

6P~13P : 8.0(L) x 2.8(W) x 0.06(T)

△14P~30P : 12.0(L) x 2.8(W) x 0.06(T)

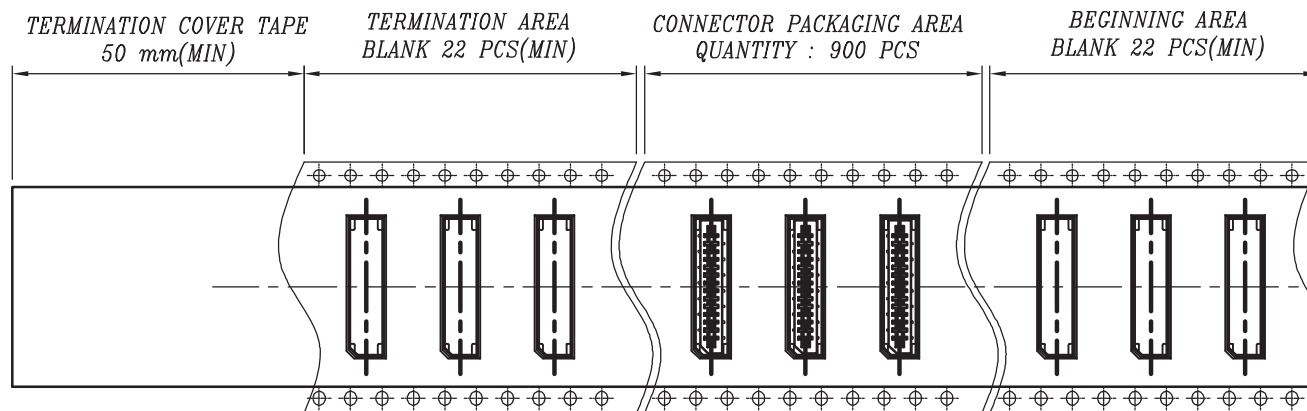

IN THE DIRECTION
OF PULLING

WIDTH : 32 , 44 , 56 mm Carrier

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ±

照片框

ORDER INFORMATION

FPA-VL2256CR-xx-LF
SERIES
180°SMT
NON ZIF
LEADFREE
02~36WAY
MYLAR+REEL
HIGH 5.6mm
DUAL PIN LAYOUT
DUAL CONTACT

DESCRIPTION: FPC 1.0mm PITCH NON ZIF TOP ENTRY TYPE REEL PACKAGING