


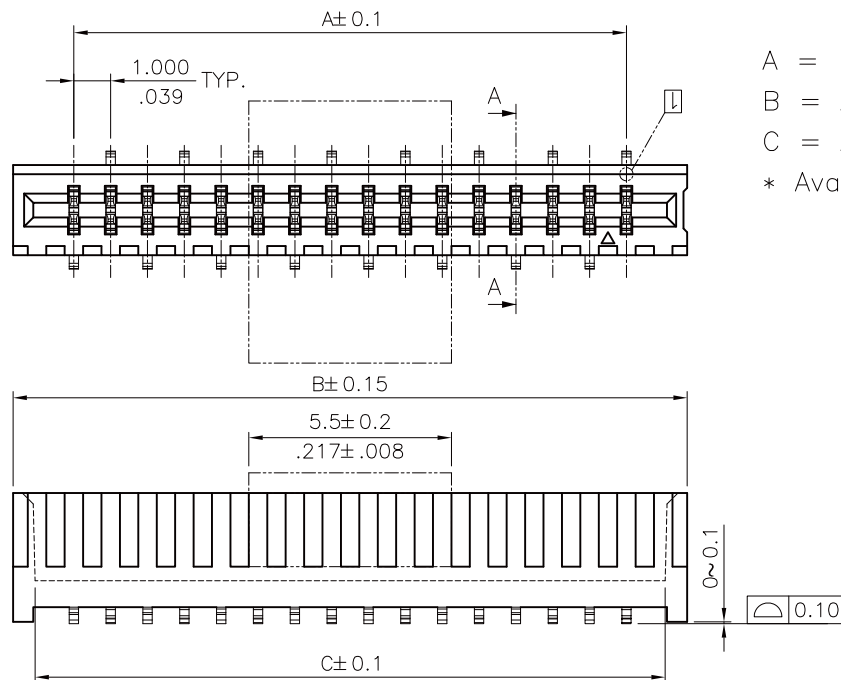

A = 1.0 * No. of Spaces

B = A + 3.3

C = A + 2.1

* Available in 4 through 32 circuits



Note :

1. Material :

* Body : Nylon 6T With 30% GF. UL 94-0
Color Black


* Contact : Copper alloy

2. For Lead Free IR Reflow Process

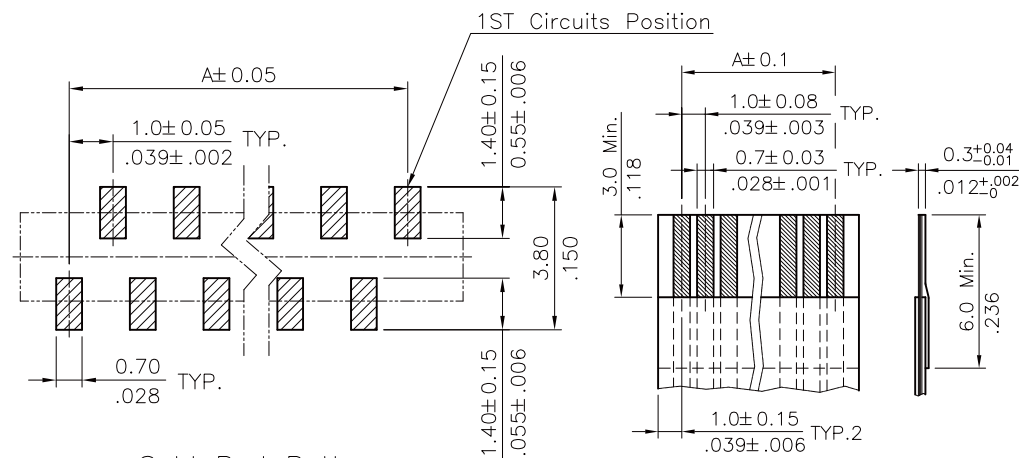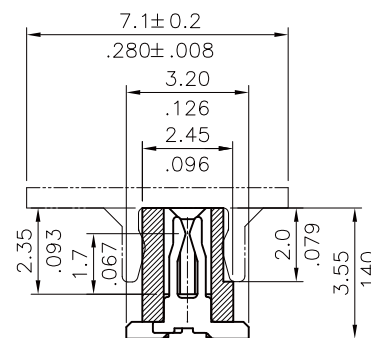

Sold Pad Pattern

Accommodated FFC

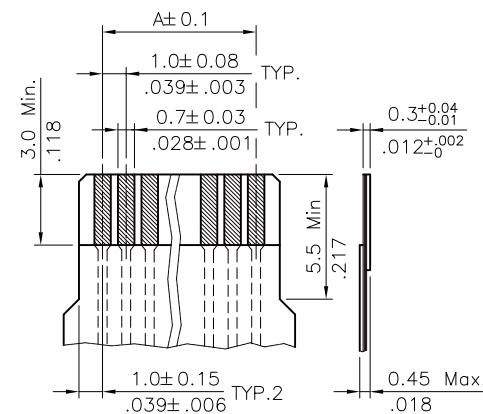

Accommodated FPC

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

FPA-VL2L35CR-xx-LF

SERIES T LEADFREE
04~32WAY

180°SMT REEL
NON ZIF CAP
DUAL CONTACT HIGH 3.55mm
L TYPE FOOT

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.15
.XX ± 0.10
.XXX ± 0.05
ANG ±



DESCRIPTION:

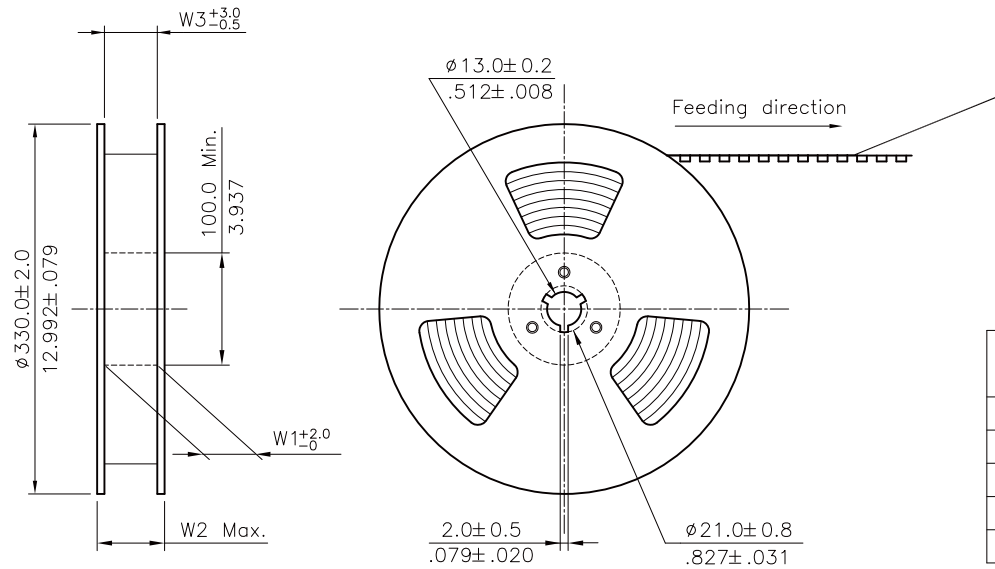


NOTE :

- * Reel Material : Corrugated Paper
- * Carrier Material : Clear Conductive Polystyrene Alloy
- * Cover Tape Material : Polyester
- * Cover Tape Peel Strength : 0.1N – 1.3N
- * Carrier camber is within 1mm in 100mm
- * All dimensions meet EIA-481-2 & EIA-481-3 requirements.
- * Quantity : 1200 PCS/Reel

Circuits	Dimension					Packing (Reel/Cartron)
	E	F	W1	W2	W3	
5	16.0(.630)	—	16.5(.650)	22.5(.886)	16.5(.650)	11
6~15	24.0(.945)	—	24.5(.965)	30.5(1.201)	24.5(.965)	9
16~17	32.0(1.260)	28.40(1.118)	32.5(1.280)	38.5(1.516)	32.5(1.280)	7
18~30	44.0(1.732)	40.40(1.591)	44.5(1.752)	50.5(1.988)	44.5(1.752)	5
31~32	56.0(2.205)	52.40(2.063)	56.5(2.224)	62.5(2.460)	56.5(2.224)	4

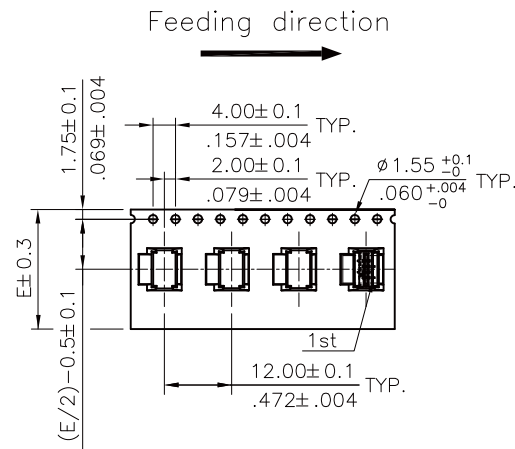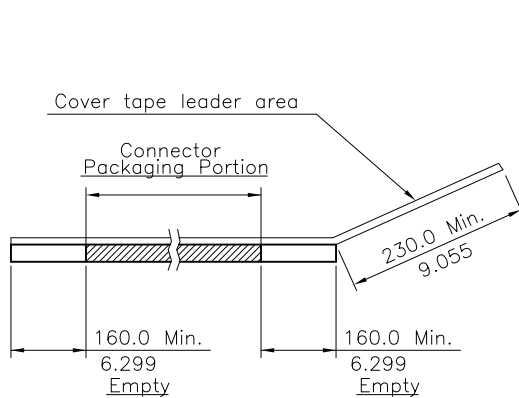

WIDTH : 16, 24mm Carrier

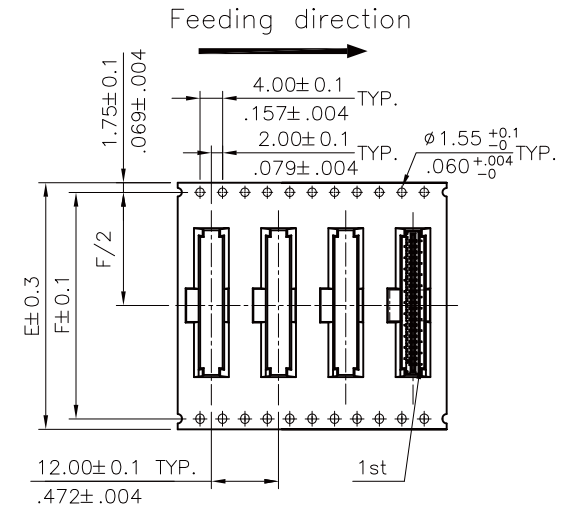

WIDTH : 32, 44, 56mm Carrier

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
X ± 0.15
.XX ± 0.10
.XXX ± 0.05
ANG ±

照片框

ORDER INFORMATION

FPA-VL2L35CR-xx-LF

SERIES

180°SMT

NON ZIF

DUAL CONTACT

REEL

CAP

HIGH 3.55mm

L TYPE FOOT

DESCRIPTION: