

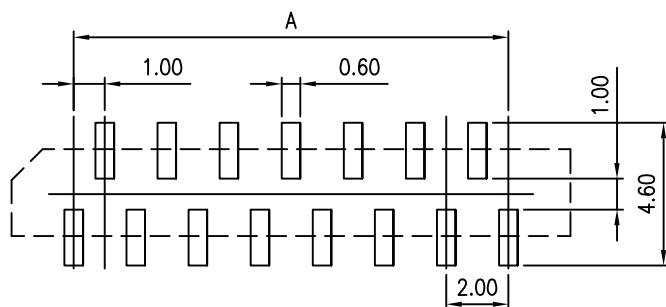
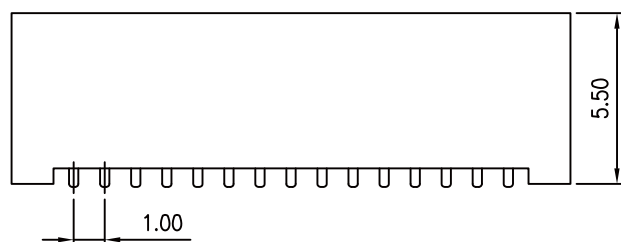
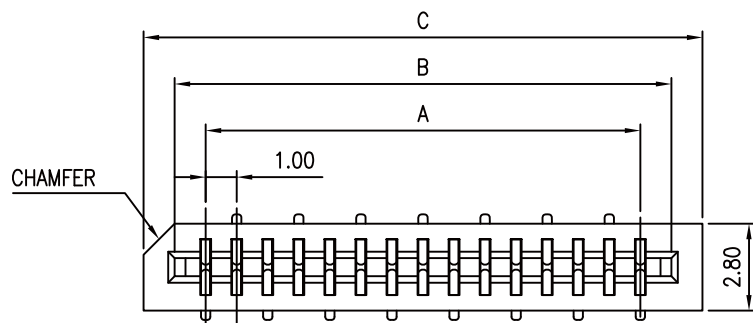


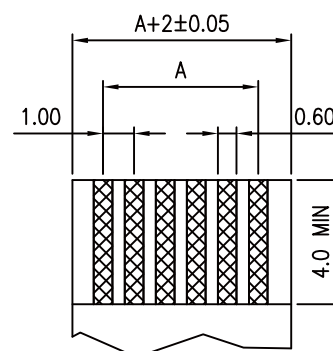

RECOMMENDED PCB LAYOUT



FPC/FFCT=0.30±0.05

MATERIAL

INSULATOR: GLASS-REINFORCED THERMOPLASTIC.
CONTACT: COPPER ALLOY.
PLATING: TIN/LEAD PLATED OVER NICKEL

ELECTRICAL

CURRENT RATING: 0.5 AMP.
DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC MIN.
INSULATION RESISTANCE: 1000 MEGAOHMS MIN.
CONTACT RESISTANCE: 30 MILLIOHMS MAX.

ENVIRONMENTAL

TEMPERATURE RANGE: -40°C TO 105°C.

DIMENSION TABLE

Circuits	Dimension			Circuits	Dimension		
	A	B	C		A	B	C
2	1.00	3.1	5	20	19.00	21.1	23
3	2.00	4.1	6	21	20.00	22.1	24
4	3.00	5.1	7	22	21.00	23.1	25
5	4.00	6.1	8	23	22.00	24.1	26
6	5.00	7.1	9	24	23.00	25.1	27
7	6.00	8.1	10	25	24.00	26.1	28
8	7.00	9.1	11	26	25.00	27.1	29
9	8.00	10.1	12	27	26.00	28.1	30
10	9.00	11.1	13	28	27.00	29.1	31
11	10.00	12.1	14	29	28.00	30.1	32
12	11.00	13.1	15	30	29.00	31.1	33
13	12.00	14.1	16	31	30.00	32.1	34
14	13.00	15.1	17	32	31.00	33.1	35
15	14.00	16.1	18	33	32.00	34.1	36
16	15.00	17.1	19	34	33.00	35.1	37
17	16.00	18.1	20	35	34.00	36.1	38
18	17.00	19.1	21	36	35.00	37.1	39
19	18.00	20.1	22				

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION


FPA-VL2L56CR-xx-LF

SERIES
180°SMT
NON ZIF
LEADFREE
02~36WAY
MYLAR+REEL
HIGH 5.6mm
L TYPE FOOT
DUAL CONTACT

DESCRIPTION: FPC/FFC 1.0 PITCH NON ZIF TOP ENTRY DUAL CONTACT SMT TYPE - STANDARD PCB LAYOUT


NOTE

1. REEL MATERIAL : PS
2. CARRIER MATERIAL : PS
3. COVER TAPE MATERIAL : PS
4. COVER TAPE REEL STRENGTH : 13"
5. QUANTITY : 900 PCS/REEL

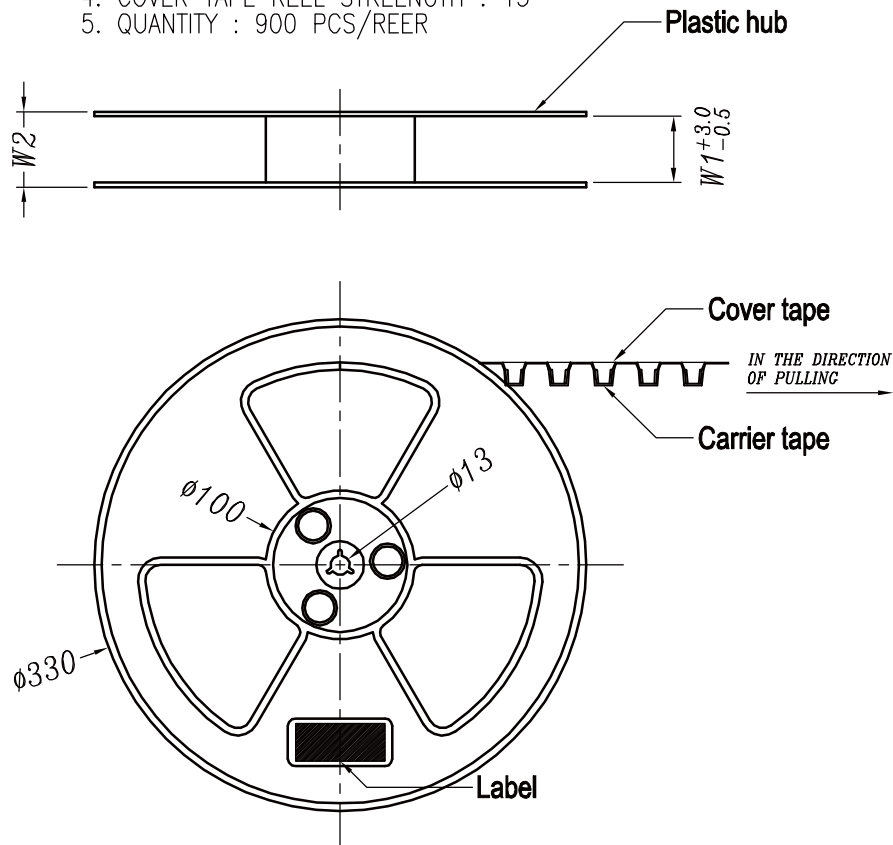

NO. OF CONTACTS	DIMENSION				PACKING	
	F	W1	W2	W3	REEL/CARTON	QUANTITY(PCS)
2~12	11.5	24.5	30.5	24.0	10	9000
13~16	28.4	32.5	38.5	32.0	8	7200
17~28	40.4	44.5	50.5	44.0	6	5400
29~30	52.6	56.5	62.5	56.0	5	4500

Carton: 380(L) X 380(W) X 350(H)

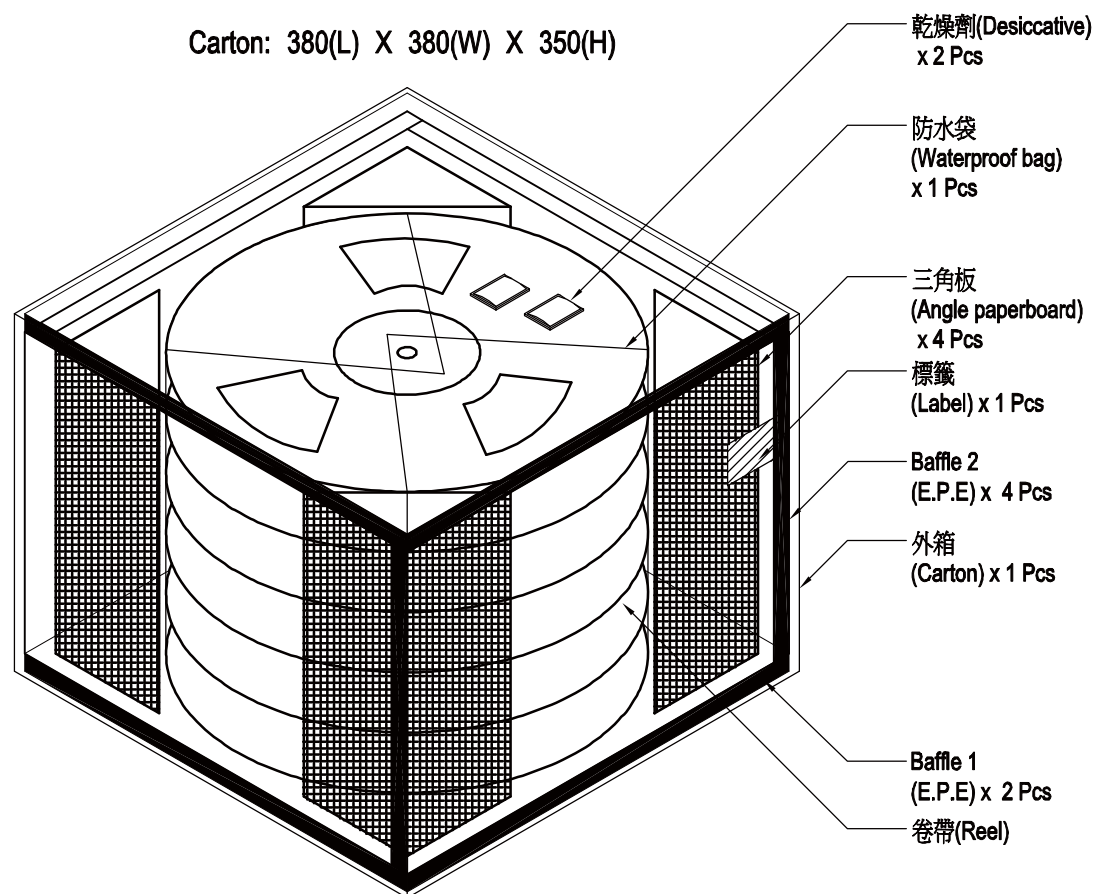

TOP ENTRY

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION


X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

FPA-VL2L56CR-xx-LF
SERIES
180°SMT
NON ZIF
LEADFREE
02~36WAY
MYLAR+REEL
HIGH 5.6mm
L TYPE FOOT
DUAL CONTACT

DESCRIPTION: FPC 1.0mm PITCH NON ZIF TOP ENTRY TYPE REEL PACKAGING

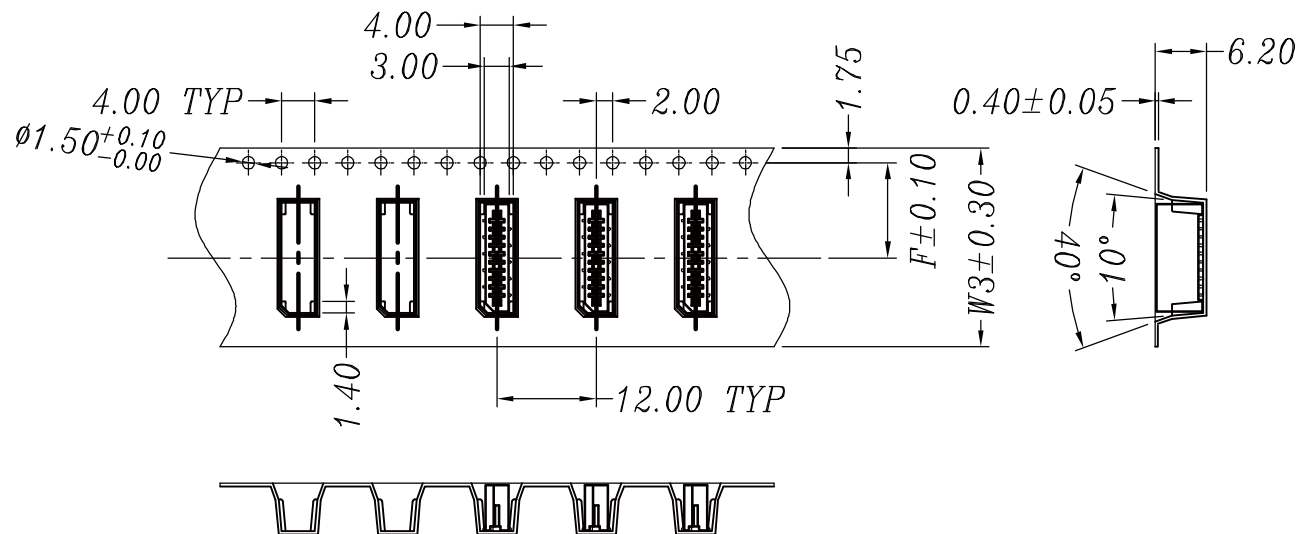


TAPE(MYLAR)
 2P~ 5P : 4.0(L) x 2.8(W) x 0.06(T)
 6P~13P : 8.0(L) x 2.8(W) x 0.06(T)
 14P~30P : 12.0(L) x 2.8(W) x 0.06(T)

TERMINATION COVER TAPE
50 mm(MIN)

TERMINATION AREA
BLANK 22 PCS(MIN)

CONNECTOR PACKAGING AREA
QUANTITY : 900 PCS

BEGINNING AREA
BLANK 22 PCS(MIN)

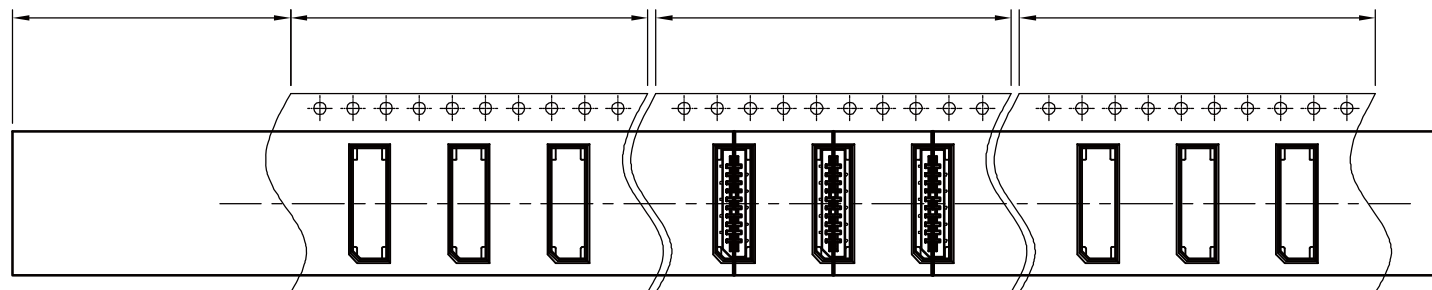

IN THE DIRECTION
OF PULLING

TOP ENTRY

WIDTH : 24 mm Carrier

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPA-VL2L56CR-xx-LF

SERIES

LEADFREE

02~36WAY

MYLAR+REEL

HIGH 5.6mm

L TYPE FOOT

DUAL CONTACT

DESCRIPTION: FPC 1.0mm PITCH NON ZIF TOP ENTRY TYPE REEL PACKAGING

