





NOTES

- 1.MATERIAL: NYLON UL94V-0
CONTACT: PHOSPHOR BRONZE
- 2.PLATING:
G: TIN 100U" MIN
OVER NICKEL 40U".


- 4.DIM A=1mm*(CKT-1)
DIM B=DIM A+2.1mm
DIM C=DIM A+4mm

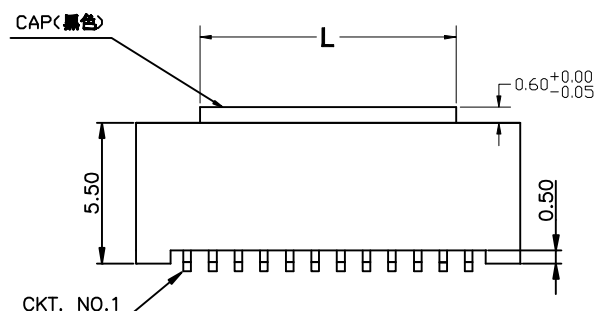

FFC/FPC DIMENSION
THICKNESS 0.26~0.32mm
TOLERANCE: 0.05mm

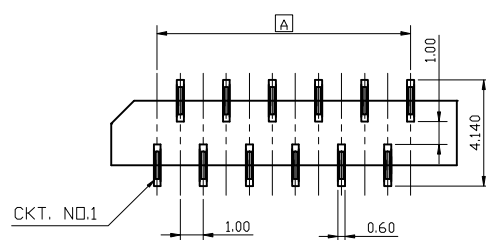

PC BOARD LAYOUT
TOP VIEW
PCB T=1.6mm

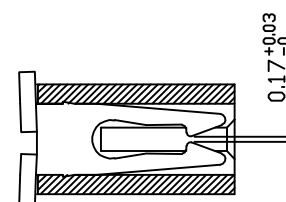

Q-Q SECTION

PIN	LENGTH	L
3 - 8		4.0mm
9 - 36		10.00mm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.13
.XXX ± 0.08
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPA-VL2L58C-xx-LF
SERIES
180°SMT
NON ZIF
CAP
HIGH 5.8mm
L TYPE FOOT
DUAL CONTACT
LEADFREE
02~36WAY

DESCRIPTION: