

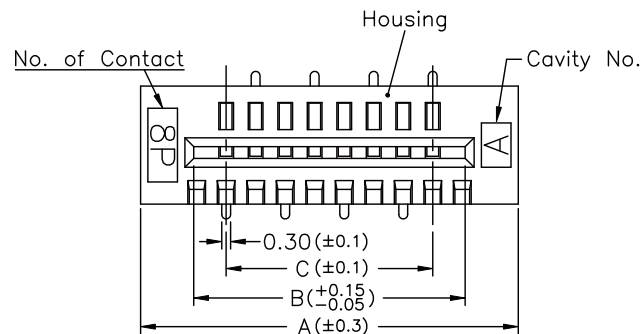
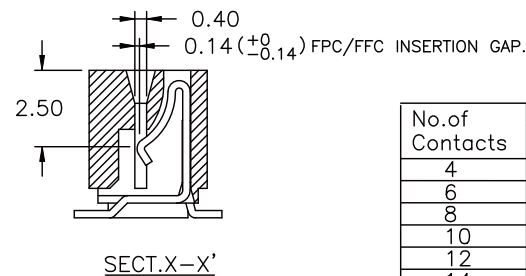



PCB Layout

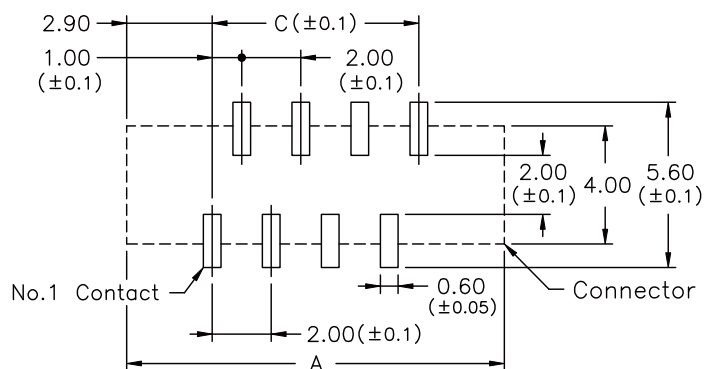

Applicable FPC

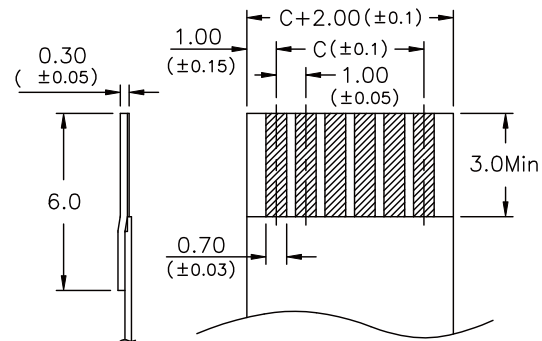

NOTE:

- 1.MATERIAL:
HOUSING:THERMOPLASTIC
CONTACTS:COPPER ALLOY
- 2.PLATING:
CONTACTS:SEE ORDERING INFORMATION
- 3.RATING:
OPERATING VOLTAGE:50V
CURRENT RATING:0.5A
OPERATING TEMPERATURE:-55°C ~ +85°C

No.of Contacts	Dimensions		
	A	B	C
4	8.80	5.20	3.00
6	10.80	7.20	5.00
8	12.80	9.20	7.00
10	14.80	11.20	9.00
12	16.80	13.20	11.00
14	18.80	15.20	13.00
16	20.80	17.20	15.00
18	22.80	19.20	17.00
20	24.80	21.20	19.00
22	26.80	23.20	21.00
24	28.80	25.20	23.00
26	30.80	27.20	25.00
28	32.80	29.20	27.00
30	34.80	31.20	29.00
32	36.80	33.20	31.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPA-VLAL50CR-xx-HF

SERIES | | | | | HALOGEN FREE

180°SMT | | | | | REEL 04~32WAY





NON ZIF | | | | | MYLAR

SINGLE CONTACT | | | | | HIGH 5.0mm

L TYPE FOOT

DESCRIPTION:

EMBOSED TAPe PACKING

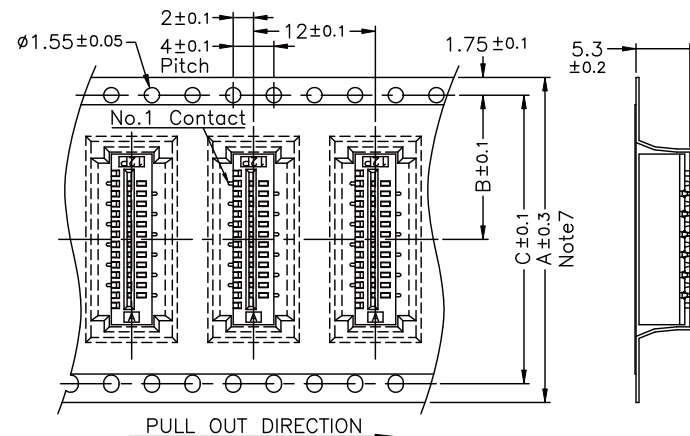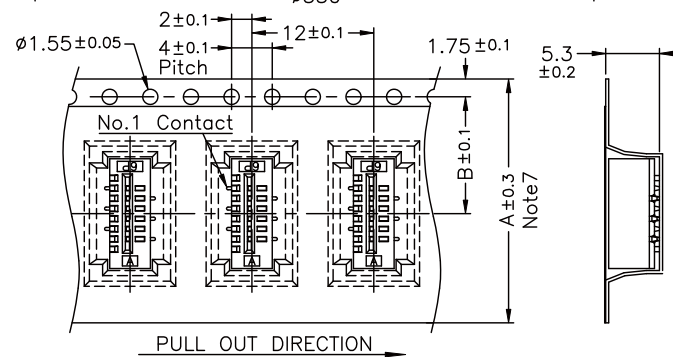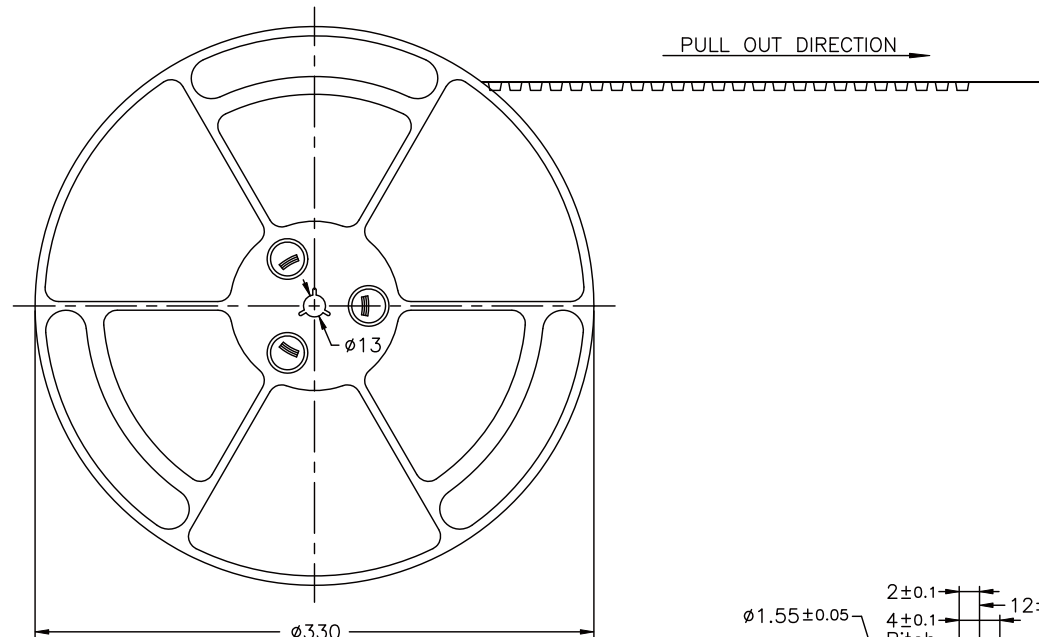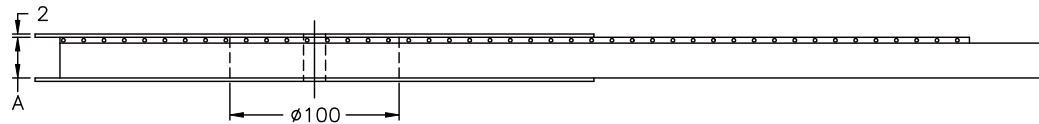

Note:

- 1.10 sprocket hole pitch cumulative tolerance ± 0.2 .
2. Carrier camber is within 1 mm in 250mm.
3. Material : Black Conductive Polystyrene Alloy
4. All dimensions meet EIA-481-B requirements.
5. Thickness : 0.35 ± 0.05 mm
6. Component load per 13" reel : 1000 pcs.
7. For tape width (dimension A) 24mm a pilot hole is provided on one side.
For tape width (dimension A) 32mm and 44,56mm pilot holes are provided on both sides.

No. of Contacts	DIM. A Note 7	DIM. B	DIM. C
4 ↓ 10	24	11.5	—
12 ↓ 14	32	14.2	28.4
16 ↓ 26	44	20.2	40.4
28 ↓ 32	56	26.2	52.4

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPA-VZAL50CR-xx-HF

SERIES 180°SMT ZIF SINGLE CONTACT

REEL MYLAR HIGH 5.0mm L TYPE FOOT

HALOGEN FREE 04~32WAY

DESCRIPTION: