

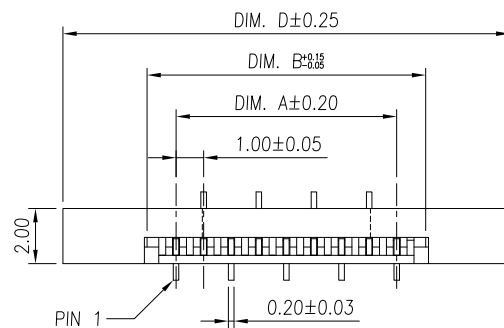
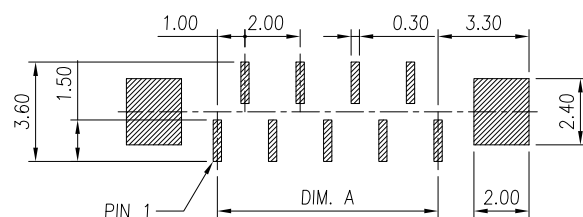



SECTION A-A

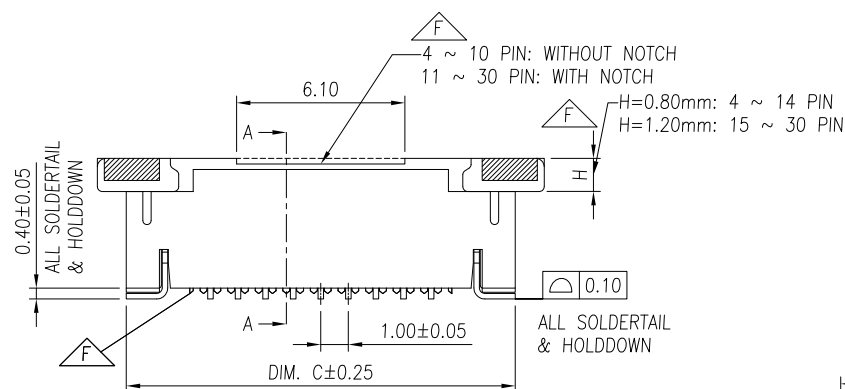

RECOMMENDED PCB LAYOUT
TOLERANCE: ± 0.05



FFC/FPC DIMENSION
THICKNESS 0.30 ± 0.03 mm

SPEC :

1. Housing: Hight-Temp Plastic, UL94-V
Color: Nature(Lvory)(PA46)
2. Locker: Hight-Temp Plastic, UL94-V
Color: Black(9T)
3. Contact: Phosphor Bronze(C5191)
4. Solder Tab: BRASS(C2680)
5. Operating Voltage (Max): 50V AC
6. Current Rating (Max): 0.5A DC
7. Operating Temperature Range : $-45^{\circ}\text{C} \sim +85^{\circ}\text{C}$

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$ 0.10
ANG $\pm$


照片框

ORDER INFORMATION

FPA-VZAL51-xx-LF

SERIES
180°SMT
ZIF
LEAD FREE
15~30WAY
HIGH 5.1mm
L TYPE FOOT POSITION
SINGLE CONTACT

DESCRIPTION: 1.0PH 5.1H 抽屜立貼單接正腳位



■ DIMENSION TABLE

Pos.	Dimension				
	A	B	C	D	E
15	14.00	16.10	20.10	22.20	5.10
16	15.00	17.10	21.10	23.20	5.10
17	16.00	18.10	22.10	24.20	5.10
18	17.00	19.10	23.10	25.20	5.10
19	18.00	20.10	24.10	26.20	5.10
20	19.00	21.10	25.10	27.20	5.10
21	20.00	22.10	26.10	28.20	5.10
22	21.00	23.10	27.10	29.20	5.10
23	22.00	24.10	28.10	30.20	5.10
24	23.00	25.10	29.10	31.20	5.10
25	24.00	26.10	30.10	32.20	5.10
26	25.00	27.10	31.10	33.20	5.10
27	26.00	28.10	32.10	34.20	5.10
28	27.00	29.10	33.10	35.20	5.10
29	28.00	30.10	34.10	36.20	5.10
30	29.00	31.10	35.10	37.20	5.10

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPA-VZAL51-xx-LF

SERIES

180°SMT

ZIF

15~30WAY

L TYPE FOOT POSITION

SINGLE CONTACT

LEAD FREE
HIGH 5.1mm

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 1.0PH 5.1H 抽屜立貼單接正腳位