


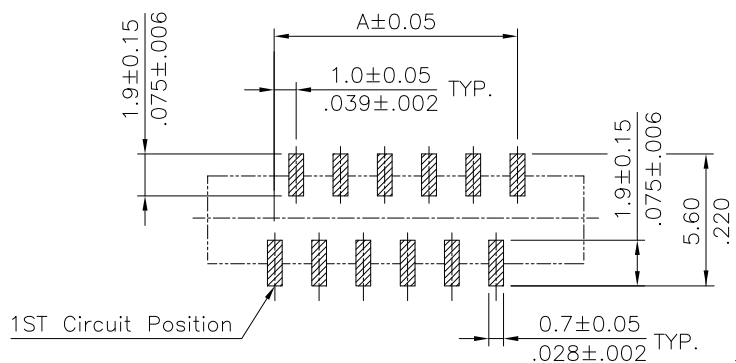
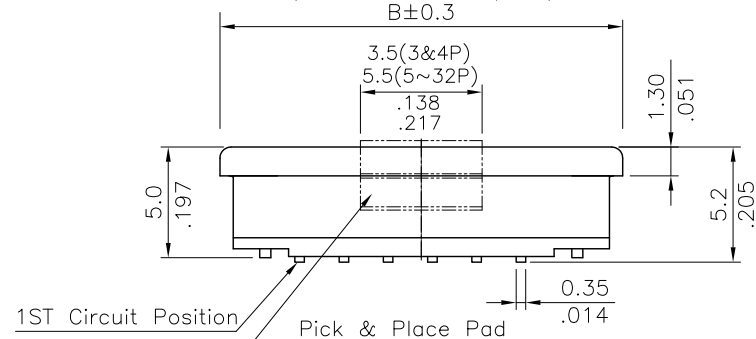
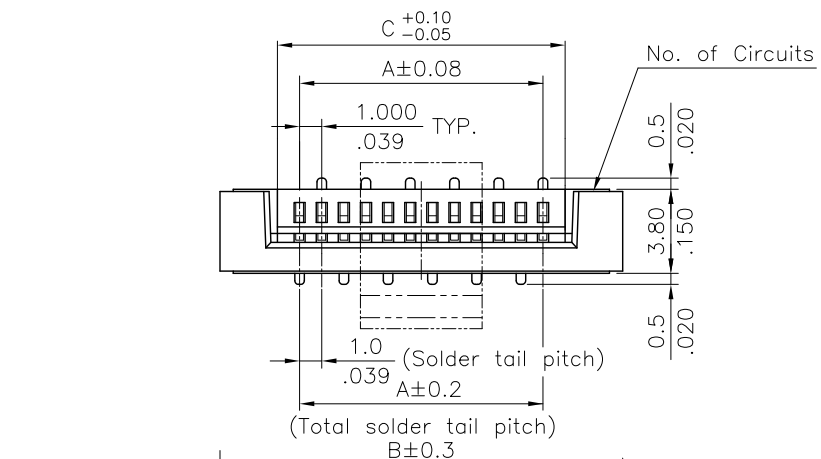


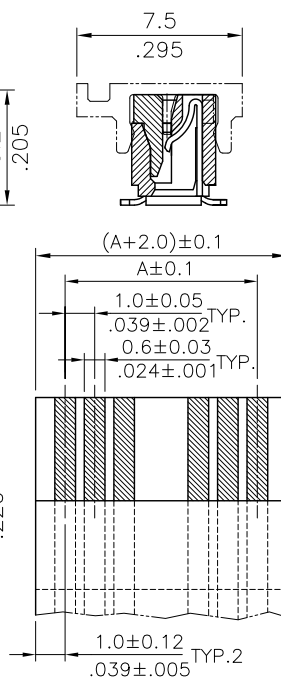

Recommended P.C. Board Layout

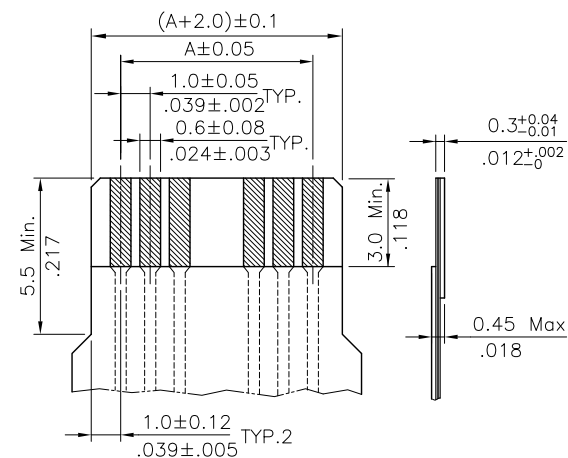

* ACCOMMODATED FFC



* ACCOMMODATED FPC

Material:

* Insulation: Nylon 6T UL 94V-0
Color Nature

△ * Slider: Nylon 6T UL 94V-0
Color Black

* Contact: Phosphor Bronze

A = 1.00 * No. of Spaces

B = A + 7.2

C = A + 2.1

* Available in 4 through 32 circuits

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION


X, ±
X, ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

FPA-VZAL52CR-xx-LF
SERIES | | | | 04~32WAY | LEAD FREE
180°SMT | | | | REEL
ZIF | | | | CAP
HIGH 5.2mm
L TYPE FOOT POSITION
SINGLE CONTACT



DESCRIPTION:

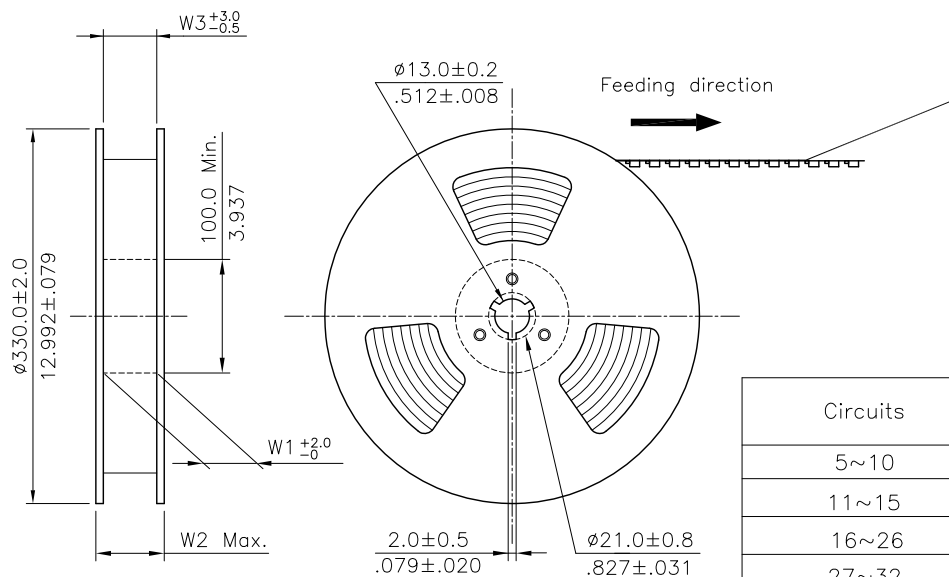


NOTE :

- * Reel Material : Corrugated Paper
- * Carrier Material : Clear, Conductive Polystyrene Alloy
- * Cover Tape Material : Polyester
- * Cover Tape Peel Strength : 0.1N – 1.3N
- * Carrier camber is within 1mm in 250mm
- * All dimensions meet EIA-481-B requirements.
- * Quantity : 800 PCS/Reel

Circuits	Dimension					Packing (Reel/Caton)
	E	F	W1	W2	W3	
5~10	24.0(.945)	—	24.5(.965)	30.5(1.201)	24.5(.965)	9
11~15	32.0(1.260)	28.40(1.118)	32.5(1.280)	38.5(1.516)	32.5(1.280)	7
16~26	44.0(1.732)	40.40(1.591)	44.5(1.752)	50.5(1.988)	44.5(1.752)	5
27~32	56.0(2.205)	52.40(2.063)	56.5(2.224)	62.5(2.461)	56.5(2.224)	3

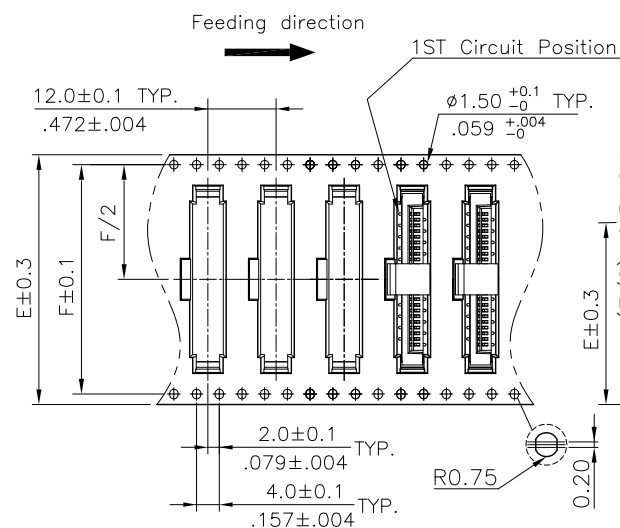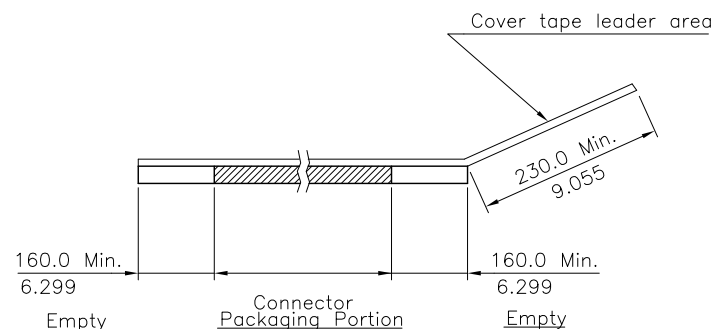

WIDTH : 32, 44 & 56 mm Carrier

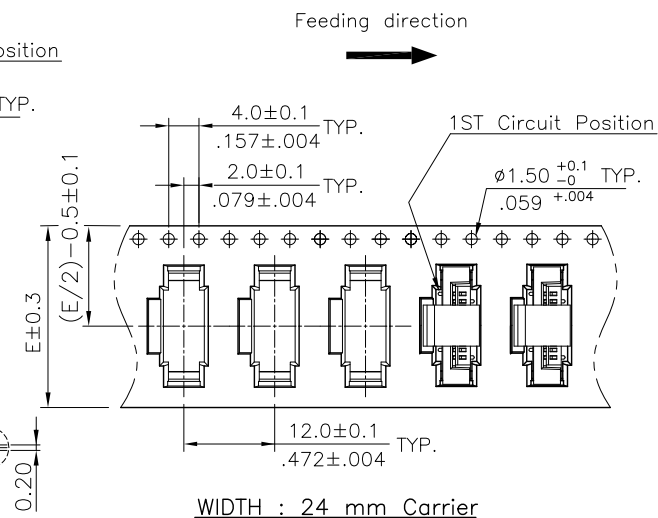

WIDTH : 24 mm Carrier

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$


.X, $\pm$

.XX, $\pm$

.XXX, $\pm$

ANG, $\pm$

PPOJECTION



ORDER INFORMATION

FPA-VZAL52CR-xx-LF
SERIES | 04~32WAY | LEAD FREE
180°SMT | REEL
ZIF | CAP | HIGH 5.2mm
L TYPE FOOT POSITION
SINGLE CONTACT

DESCRIPTION: