

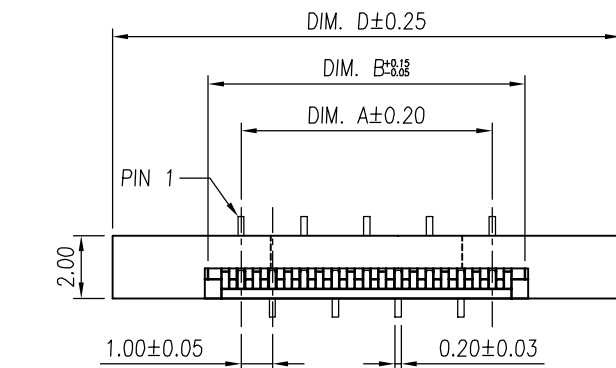




CAP PLACEMENT DIAGRAM

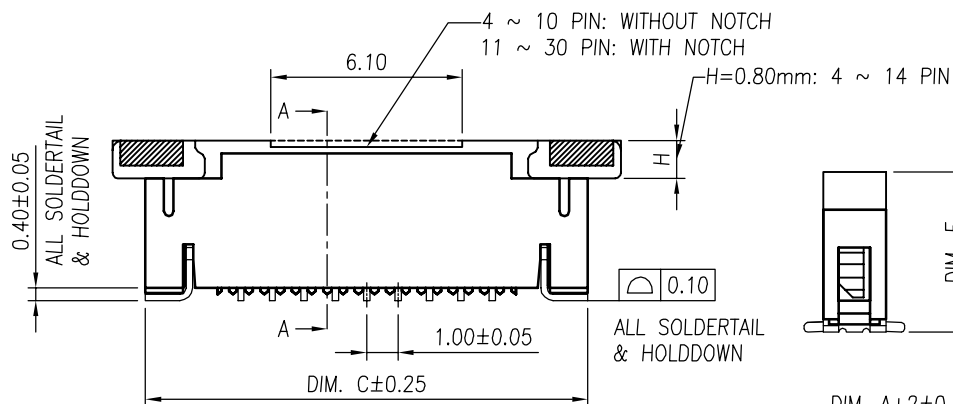

SECTION A-A

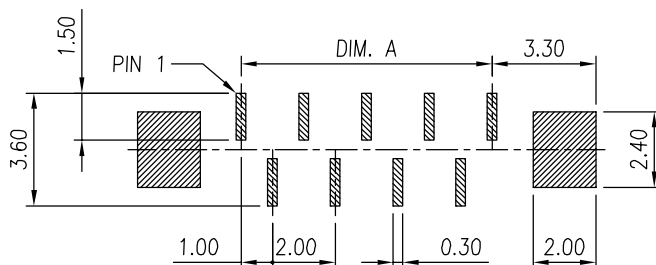

RECOMMENDED PCB LAYOUT
TOLERANCE: ± 0.05

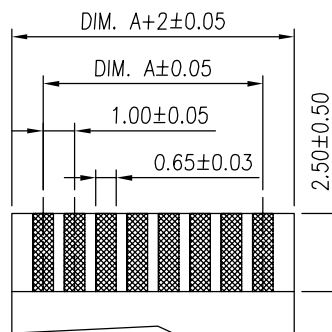

FFC/FPC DIMENSION
THICKNESS 0.30 ± 0.03 mm

NOTE:

1.MATERIAL:

HOUSING: PA46, UL94V-0. COLOR: NATURAL.

ACTUATOR: PA9T, UL94V-0. COLOR: BLACK.

TERMINAL: PHOSPHOR BRONZE.

HOLDDOWN: BRASS.

CAP: LCP, UL94V-0. COLOR: BLACK.

2.FINISH:

TERMINAL: 100u" MIN. TIN PLATING OR G/F GOLD PLATING WITH 50u" MIN. NICKEL UNDERPLATED OVERALL.

HOLDDOWN: 100u" MIN. TIN PLATING WITH 50u" MIN. NICKEL UNDERPLATED OVERALL.

■ DIMENSION TABLE

Pos.	Dimension				
	A	B	C	D	E
4	3.00	5.10	9.10	11.20	4.70
5	4.00	6.10	10.10	12.20	4.70
6	5.00	7.10	11.10	13.20	4.70
7	6.00	8.10	12.10	14.20	4.70
8	7.00	9.10	13.10	15.20	4.70
9	8.00	10.10	14.10	16.20	4.70
10	9.00	11.10	15.10	17.20	4.70
11	10.00	12.10	16.10	18.20	4.70
12	11.00	13.10	17.10	19.20	4.70
13	12.00	14.10	18.10	20.20	4.70
14	13.00	15.10	19.10	21.20	4.70

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.40
X. ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG $\pm 1^\circ$

照片框

ORDER INFORMATION

FPA-VZAR47C-xx-LF
SERIES | 04~14WAY | LEADFREE
180°SMT | CAP | 4.7mm HIGH
ZIF | R TYPE FOOT POSITION
SINGLE CONTACT

DESCRIPTION: FPC/FFC 1.0mm PITCH ZIF SMT TYPE CONNECTOR