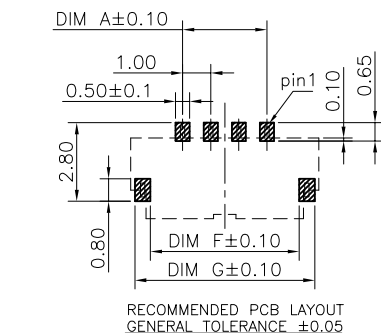


NOTES:

1. MATERIAL:







- 1.1 HOUSING: THERMOPLASTIC, LCP., UL94V-0.
- 1.2 ACTUATOR: THERMOPLASTIC, PA6T., UL94V-0.
- 1.3 CONTACT: PHOSPHOR BRONZE
- 1.4 FITTING NAIL: BRASS

2. FINISH:


- 2.1 CONTACT:
50~100u" NICKEL UNDERPLATING OVERALL.
1:GOLD FLASH PLATING.
N:80~120u" MATT TIN PLATING ON SOLDER TAILS,
- 2.2 FITTING NAIL:
50~100u" NICKEL UNDERPLATING OVERALL.
80~200u" MATT TIN PLATING ON SOLDER TAILS(LEAD FREE).

3. REFLOW SOLDER CAPABLE TO 260°C

4. PACKAGE PLS. REFER SEE PART NUMBER

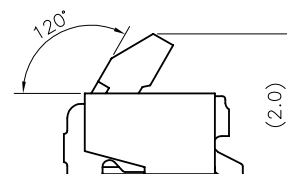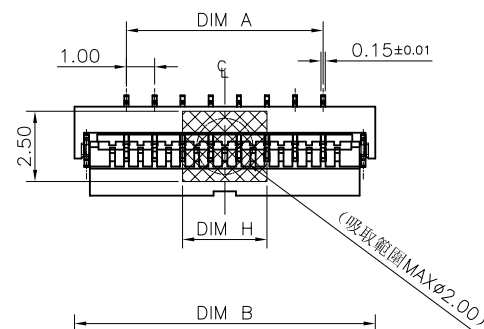

ACTUATOR OPEN STATE
SCALE 6:1



CKT	DIMA	DIMB	DIMC	DIMD	DIME	DIMF	DIMG	DIMH
004	3.00	6.70	5.07	5.85	5.00	5.30	6.40	3.00
006	5.00	8.70	7.07	7.85	7.00	7.30	8.40	
008	7.00	10.70	9.07	9.85	9.00	9.30	10.40	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X. ± 0.50
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

FPA-WHB1213-xx-LF

SERIES
90°SMT
LEADFREE
05~25WAY
1.3mm GAP
HIGH 2.0mm
BOTTOM CONTACT
HINGED ZIF

DESCRIPTION: 1.0mm FPC EASY ON CONN. SMT R/A B/C Type