


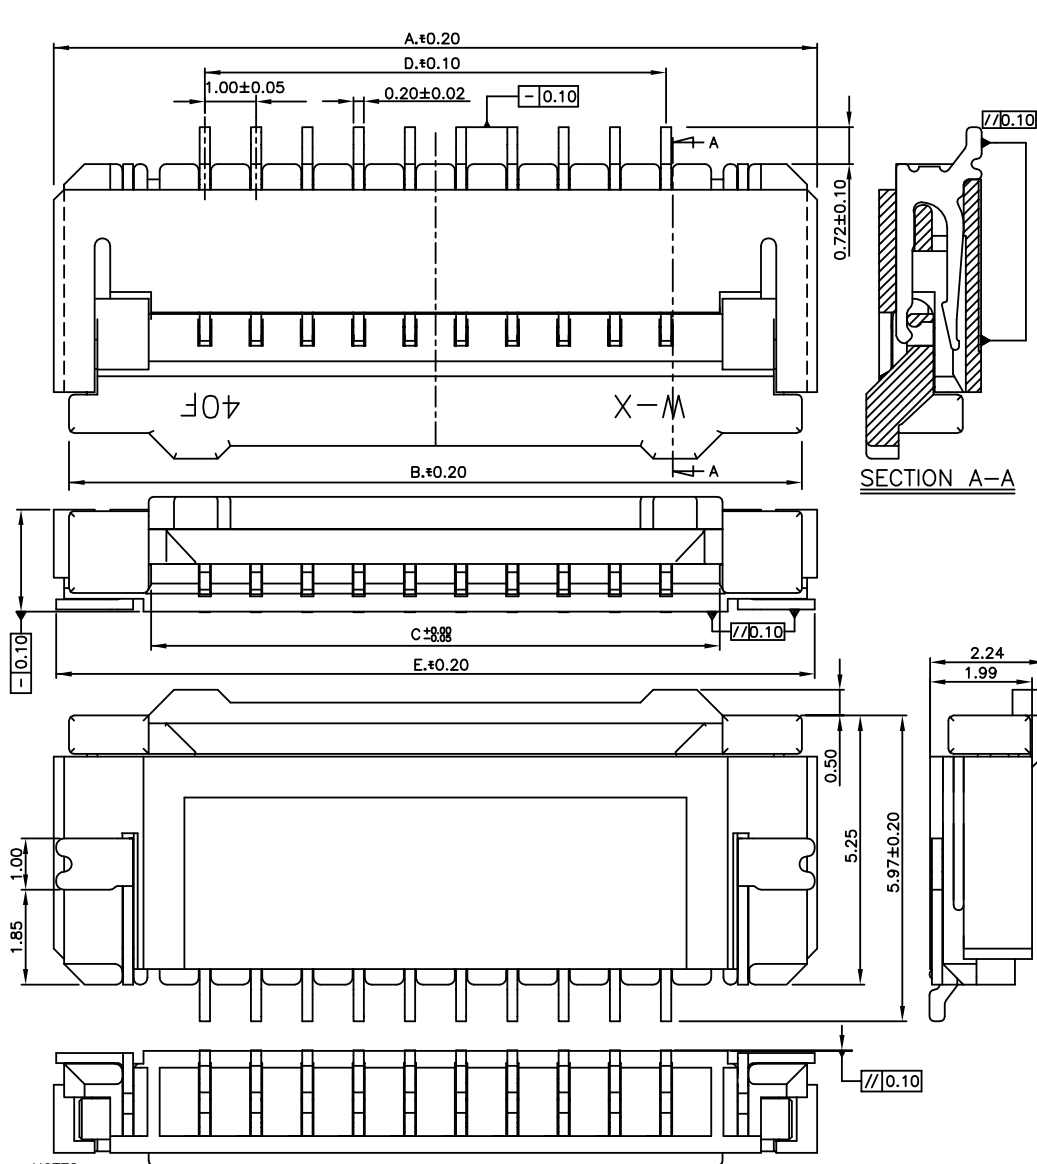

NOTES:

- NOTES:
1. HOUSING MATERIAL: HEAT RESISTANCE PLASTIC (UL94 V-0)
 2. ACTUATOR MATERIAL: HEAT RESISTANCE PLASTIC (UL94 V-0)
 3. TERMINAL MATERIAL: PHOSPHOR BRONZE C5210R-SH. TIN PLATING (LEAD FREE)
 4. FITTING NAIL MATERIAL: PHOSPHOR BRONZE C5191R-H. TIN PLATING (LEAD FREE)
 5. TERMINAL RETENTION FORCE: 400gf (MIN)
 6. FPC CABLE RETENTION FORCE: NO. OF CONTACT * 60gf (MIN)

P数	A	B	C	D	E
★ 4	8.90	8.30	5.07	3.00	8.80
★ 5	9.90	9.30	6.07	4.00	9.80
★ 6	10.90	10.30	7.07	5.00	10.80
★ 7	11.90	11.30	8.07	6.00	11.80
★ 8	12.90	12.30	9.07	7.00	12.80
★ 9	13.90	13.30	10.07	8.00	13.80
★ 10	14.90	14.30	11.07	9.00	14.80
★ 11	15.90	15.30	12.07	10.00	15.80
★ 12	16.90	16.30	13.07	11.00	16.80
★ 13	17.90	17.30	14.07	12.00	17.80
★ 14	18.90	18.30	15.07	13.00	18.80
★ 15	19.90	19.30	16.07	14.00	19.80
★ 16	20.90	20.30	17.07	15.00	20.80
★ 17	21.90	21.30	18.07	16.00	21.80
★ 18	22.90	22.30	19.07	17.00	22.80
★ 19	23.90	23.30	20.07	18.00	23.80
★ 20	24.90	24.30	21.07	19.00	24.80
★ 21	25.90	25.30	22.07	20.00	25.80
★ 22	26.90	26.30	23.07	21.00	26.80
★ 23	27.90	27.30	24.07	22.00	27.80
★ 24	28.90	28.30	25.07	23.00	28.80
★ 25	29.90	29.30	26.07	24.00	29.80
★ 26	30.90	30.30	27.07	25.00	30.80
★ 27	31.90	31.30	28.07	26.00	31.80
★ 28	32.90	32.30	29.07	27.00	32.80
★ 29	33.90	33.30	30.07	28.00	33.80
★ 30	34.90	34.30	31.07	29.00	34.80

★ 記號者為已開模PIN數

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.15
.XX ± 0.10
.XXX ±
ANG ±

PPOJECTION


照片框

ORDER INFORMATION

FPA-WHB22R-xx-LF

SERIES
90°SMT
HINGED ZIF
LEADFREE
04~30WAY
REEL
HIGH 2.24mm
BOTTOM CONTACT

DESCRIPTION:

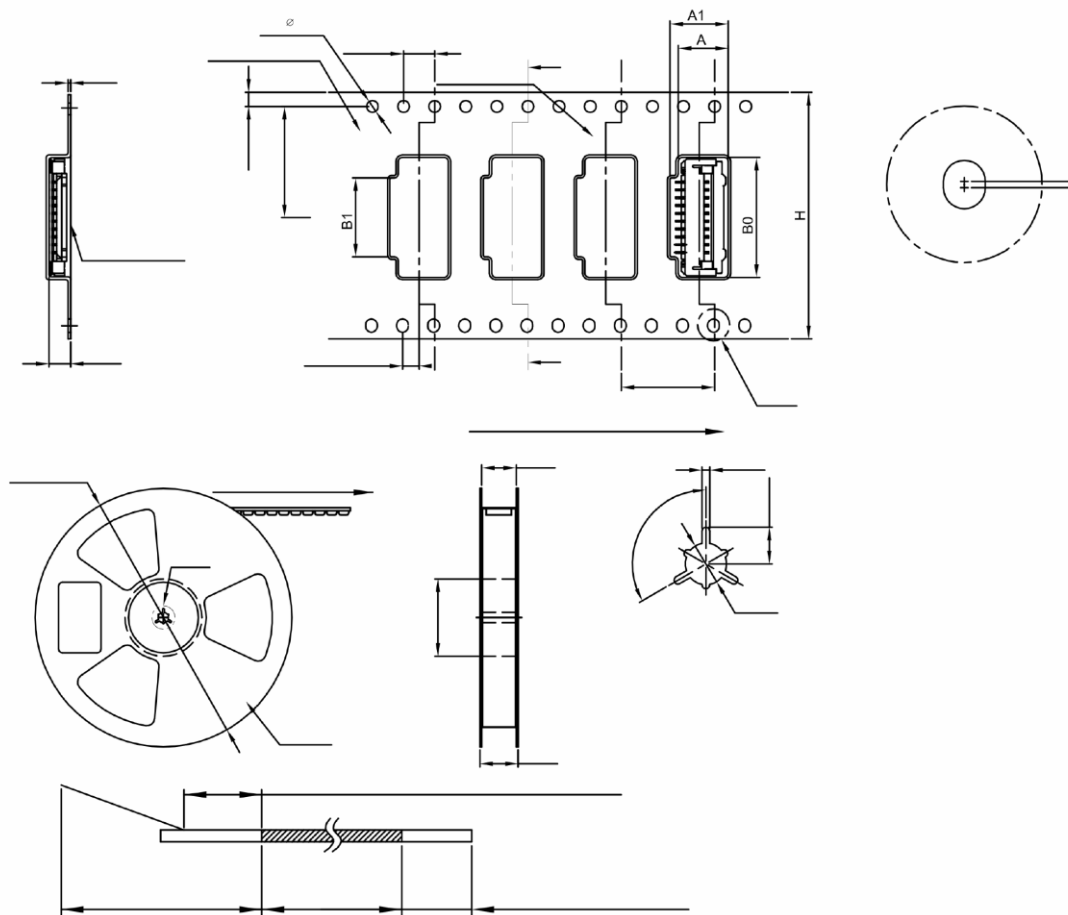

PIN位	A0	A1	B0	B1	K0	K1	H	W1	W2
4P	5.7	6.5	12.0	5.4	2.8	0.35	24	24.5	30
5P			13.0	6.4					
6P			14.0	7.4					
7P			15.0	8.4					
8P			16.0	9.4					
9P			17.0	10.4					
10P			18.0	11.4			32	32.5	38
11P			19.0	12.4					
12P			20.0	13.4					
13P			21.0	14.4					
14P			22.0	15.4					
15P			23.0	16.4					
16P			24.0	17.4					
17P			25.0	18.4					
18P			26.0	19.4					
19P			27.0	20.4			44	44.5	50
20P			28.0	21.4					
21P			29.0	22.4					
22P			30.0	23.4					
23P			31.0	24.4					
24P			32.0	25.4					
25P			33.0	26.4					
26P			34.0	27.4					
27P			35.0	28.4			56	56.5	62
28P			36.0	29.4					
29P			37.0	30.4					
30P			38.0	31.4					
31P			39.0	32.4					
32P			40.0	33.4					
33P			41.0	34.4					
34P			42.0	35.4					

1. 产品方向与图示要求保持一致;
2. 每盘包装数量为2000PCS;
3. 检查胶膜两边是否完全粘贴, 是否平整, 胶膜与载带贴合双边是否一致,
4. 特别注意胶膜双边不可有卷皱, 偏心现象.
5. 检查载带是否有破裂, 变形, 弯曲现象.
6. 间隔2小时测试剥离力, 剥离力大小范围80-150 gf.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.15
.XX ± 0.10
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPA-WHB22R-xx-LF

SERIES
90°SMT
HINGED ZIF
LEADFREE
04~30WAY
REEL
HIGH 2.24mm
BOTTOM CONTACT

DESCRIPTION: